

2019

COMMENCAL CLASH ESSENTIAL FOX BRUSHED 2019



SPECS

FRAME	2019 CLASH, 650b, 105 mm travel
SHOCK	FOX FLOAT X2 PERFORMANCE, 230 x 65 mm, 2 positions lever rebound
FORK	FOX PERFORMANCE 36 FLOAT, 180 mm, boost / 1 volume spacer, GRIP camridge 3 positions
HEADSET	ACROS Fiber Z344/Z356, sealed bearings
STEM	RIDE ALPHA RE/ENDU, 31.8 mm, 10° angle
BAR	RIDE ALPHA, Alloy 7075, 780 mm, 31.8 mm, 30 mm rise
GRIPS	RIDE ALPHA, DH Grips, ultra soft compound, single clamp
BRAKES	SHIMANO SLX, 200 mm / 200 mm
SHIFTERS	SRAM GX EAGLE, 1 x 12 speed
CHAIN GUIDE	❖
FRONT / REAR MECH	SRAM GX EAGLE, 1 x 12 speed
BOTTOM BRACKET	SRAM DUB Pinset
CRANKSET	SRAM DESCENDANT EAGLE 6K, 34T, 170 mm on 5/ML/XL
CHAIN	SRAM GX EAGLE
CASSETTE	SRAM XG 1275, 10-50, 12 speed
RIMS	E13 TRS, 32 holes, 30 mm inner width, tubeless ready
HUBS	FORMULA, high engagement, 32 holes, sealed bearings
SPOKES / NIPPLES	SAPPHIRE spokes, stainless steel, 2.0 mm / 1.8 mm / 2.0 mm
TYRES	SCHWALBE MAGIC MARY, 27.5 x 2.35, TLE Addix Compound, front SCHWALBE NEW HANS DAMPF, 27.5 x 2.35, TLE Addix Compound, rear
SEATPOST	KINGDROCK LEV SL, 31.6 mm, Switchplate alloy lever, Travel: 100 mm on S, 125 mm on M, 150 mm on L and XL
SADDLE	WTB SLB RACE, 142 mm width, como rails
WEIGHT	15.2 kg
PEEELS INCLUDED	No
ACCESSORIES	Chain stay protector, seat stay protector, down tube protector

TECH

BICYCLE TYPE	Full suspension Enduro
FRAME MATERIAL	NEC + ULTRA SL (aluminium 6066 triple butted)
FRAME HEIGHT	3.5 kg
REAR WHEEL TRAVEL	165 mm
SHOCK LENGTH / STROKE	230 x 65 mm
PICKUP BACK SHOCK COMPATIBLE	Yes
SHOCK BUSHINGS	30 x 10 mm / 20 x 8 mm
RECOMMENDED / MAX FORK HEIGHT	571 mm / 581 mm
HEADSET DIMENSION	Taberni
HEADSET TYPE	Z344 / Z356
MAXIMUM TYRE DIMENSION (ET/PT)	70 mm
DISC BRAKE STANDARD	Postmount 200 mm
REAR ROTOR MAX SIZE	203 mm
SEATPOST / SEAT CLAMP DIAMETER	31.6 mm / 34.9 mm
BOTTOM BRACKET TYPE	Press Fit BB92
MAX CHAINRING SIZE	34T
ISCG	ISCG06
FRONT DERAILLEUR TYPE	❖
REAR HUB COMPATIBILITY	Boost, Maxx Standard

SPOKE LENGTH

WHEEL	NON DRIVE SIDE / LEFT	DRIVE SIDE / RIGHT
FRONT	271 mm	272 mm
REAR	272 mm	270 mm

Downtube



Index	Ref	Nom		Photo
5	W19CLHAXLESHRK	AXE AMORTISSEUR / BASCULEUR CLASH	12 N.m	
6	W16DHV4SHOCKAXLE	AXE AMORTISSEUR / TRIANGLE AVANT SUPREME DH / FURIOUS CLASH	9 N.m	

Hose Guide




Index	Ref	Nom		Photo
15	W19CLHCABLEGUIDET	GUIDE CABLE SUPERIEUR CLASH	3 N.m	

Main Pivot



Index	Ref	Nom		Photo
3	W19EB6804	ROULEMENT ENDURO BEARINGS 6804 LLU MAX	20 x 32 x 7	
7	W19M29AXLEMP	AXIE PIVOT PRINCIPAL META 29 ET CLASH	30-35 N.m	
8	W19M29WASHERMP	RONDELLES PIVOT PRINCIPAL META 29 ET CLASH		
BEARING KIT	W22EBCLASHV1	ROULEMENTS ENDURO BEARINGS CLASH V1	2 x 6804 / 4 x 6902 / 2 x 6903	

Chainstays / Seatstays

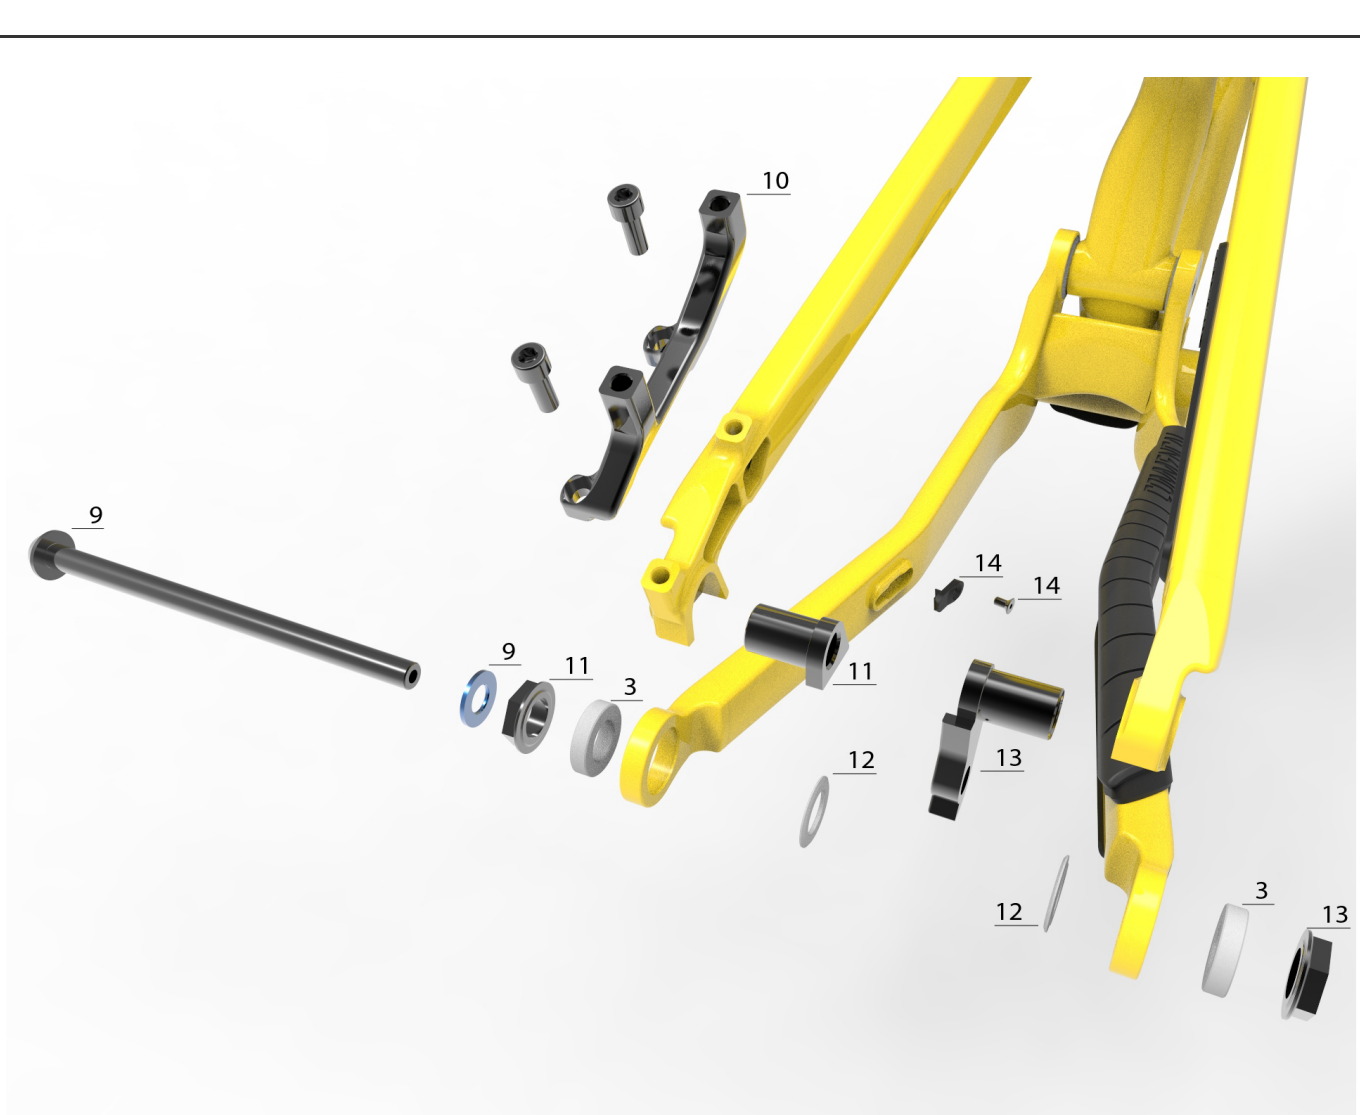

Index	Ref	Nom		Photo
10	W19CLHBRAKEH200	PATTE DE FREIN ARRIERE 200 MM CLASH		
11	W19CLHRHL	PATTE GAUCHE CLASH	22 N.m	
12	W19CLHWASHERCSS	RONDELLES BASES / HAUBANS CLASH		
13	W19CLHRHROS	PATTE DE DERAILLEUR CLASH OFFSET	22 N.m	
14	W19CLHCABLEGUIDEB	GUIDE CABLE INFRIEUR CLASH, META, META POWER, FRS, T.E.M.P.O., DHVS	3 N.m	
3	W19EB6903	ROULEMENT ENDURO BEARINGS 6903 LLU MAX	17 x 30 x 7	
9	W19CLHAXLEWHEEL	AXE DE ROUE ARRIERE CLASH	12 N.m	
BEARING KIT	W22EBCLASHV1	ROULEMENTS ENDURO BEARINGS CLASH V1	2 x 6804 / 4 x 6902 / 2 x 6903	

Protectors



Index	Ref	Nom		Photo
16	A16SSTPROTECMETAV4	PROTEGE HAUBAN META, CLASH ET META POWER		
17	W19CLHPROTECCS	PROTECTION DE BASE CLASH, META & FRS		
18	W19M29PROTECDT	PROTECTION DE DOWN TUBE META 29 / CLASH	3 N.m	
19	W18SEAL1H	PROTECTION DE PASSAGE INTERNE CABLERIE - 1 TROU		
19	W18SEAL2H	PROTECTION DE PASSAGE INTERNE CABLERIE - 2 TROUS		
19	W18SEALNOH	PROTECTION DE PASSAGE INTERNE CABLERIE - 0 TROU		

Rocker



Index	Ref	Nom		Photo
1	W19CLHAXLERKSS	AXES BASCULEUR / HAUBANS CLASH	12-15 N.m	
2	W19CLHWASHERCS	RONDELLES CONTACT SYTEM CLASH		
20	W19CLHROCKER	BASCULEUR CLASH		
3	W19EB6902	ROULEMENT ENDURO BEARINGS 6902 LLU MAX	15 x 28 x 7	
4	W19CLHAXLERKDT	AXE BASCULEUR / TUBE DIAGONAL CLASH	12-15 N.m	
BEARING KIT	W22EBCLASHV1	ROULEMENTS ENDURO BEARINGS CLASH V1	2 x 6804 / 4 x 6902 / 2 x 6903	