


2022

COMMENCAL META SX RIDE DIRT

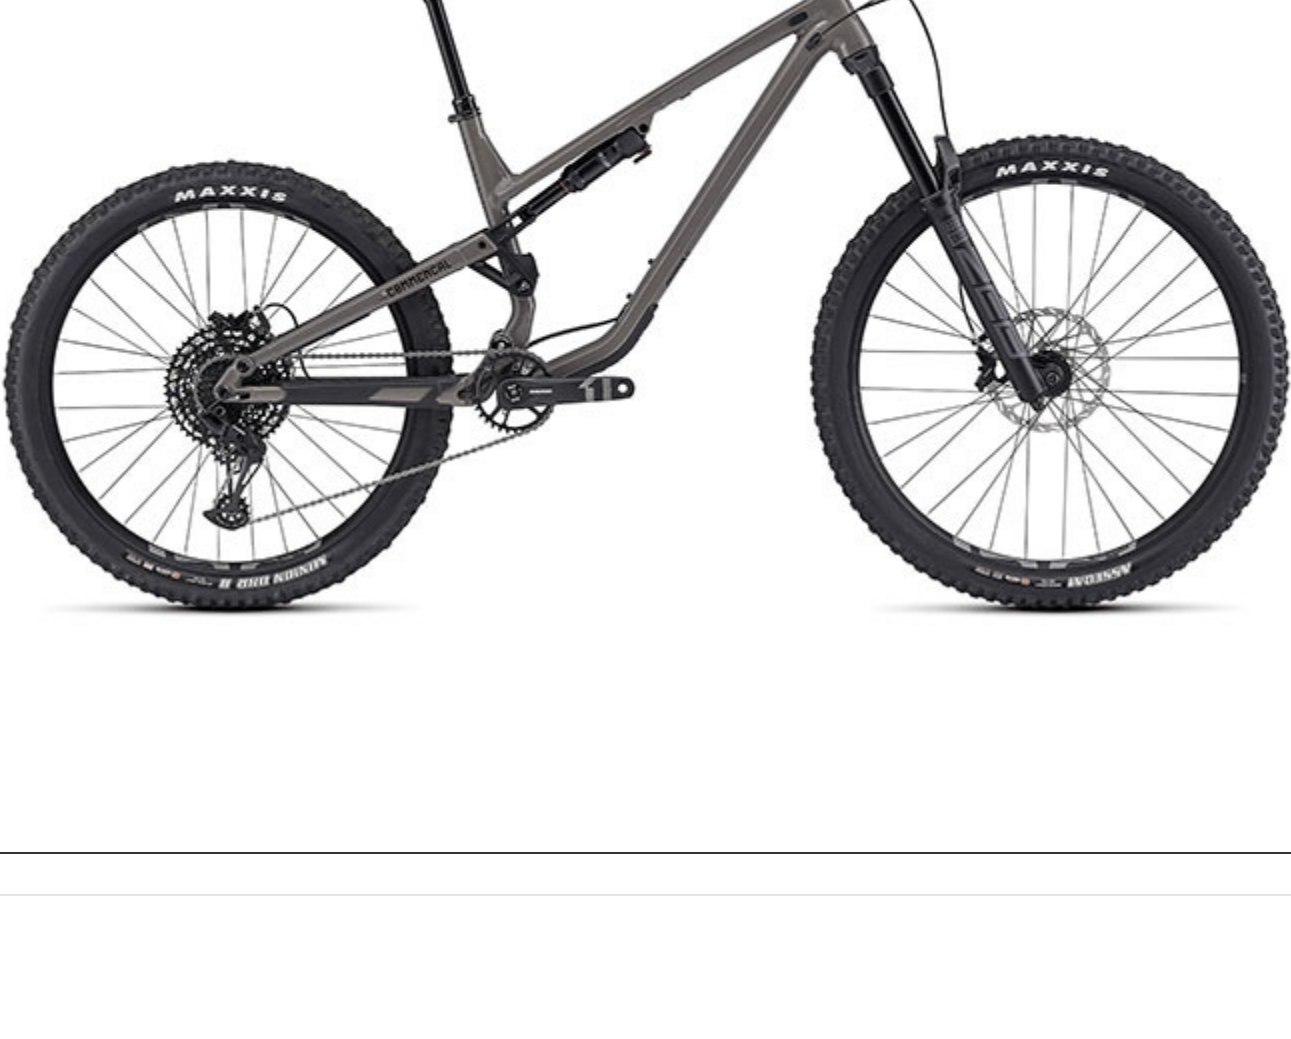

SPECS

|                                                                                                                                                                                                                                                                        |
|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>CADRE</b><br>2022 Meta SX, 160 mm travel<br>29" 27.5", Alloy 6066, triple butted tubes, T4, T6. Enduro bearings                                                                                                                                                     |
| <b>AMORTEUSEUR</b><br>ROCKSHOX Deluxe Select +<br>120 x 62.5 mm, rebound, freshhold adjustment, 2 tokens                                                                                                                                                               |
| <b>FOURCHE</b><br>ROCKSHOX zeb, 170 mm travel<br>29", Charger damper, Debonair, rebound, Boost (15 x 110 mm), 44 mm offset, 3 Token                                                                                                                                    |
| <b>JEU DE DIRECTION</b><br>ACROSIS Z544/Z556<br>Alloy cups, sealed bearings                                                                                                                                                                                            |
| <b>POTENCE</b><br>RIDE ALPHA Freende 40<br>40 mm extension, 31.8 mm                                                                                                                                                                                                    |
| <b>CINTRE</b><br>RIDE ALPHA R20 780 on S - RIDE ALPHA R27 780 on M / L - RIDE ALPHA R27 800 on XL<br>31.8 mm, 760 mm width, 20 mm rise, Alloy 6061 on S - 31.8 mm, 780 mm width, 27 mm rise, Alloy 6061 on M / L - 31.8 mm, 800 mm width, 27 mm rise, Alloy 6061 on XL |
| <b>GRIPS</b><br>ODI Elite Motion<br>Soft pro compound, single clamp, black                                                                                                                                                                                             |
| <b>FREINS</b><br>SRAM Guide T, 4 pistons, MatchMaker compatible<br>Rotors: SRAM G2 CleanSweep 200 mm, 6-bolt                                                                                                                                                           |
| <b>SHIFTERS</b><br>SRAM SX Eagle<br>12s                                                                                                                                                                                                                                |
| <b>GUIDE CHAÎNE</b><br>-                                                                                                                                                                                                                                               |
| <b>DERAILLEUR</b><br>SRAM SX Eagle<br>12s                                                                                                                                                                                                                              |
| <b>BOÎTIER DE PEDALIER</b><br>SRAM DUB<br>Pressfit                                                                                                                                                                                                                     |
| <b>PEDALIER</b><br>SRAM x1 1100 Eagle, 170 mm crank arms, DUB, Boost<br>Chaining: SRAM X1 1080 Eagle, 32t, Narrow-Wide                                                                                                                                                 |
| <b>CHAÎNE</b><br>SRAM NX Eagle<br>12s                                                                                                                                                                                                                                  |
| <b>CASSETTE</b><br>SRAM PG-1210<br>12s, 11-50t                                                                                                                                                                                                                         |
| <b>JANTES</b><br>Rear: E13 LG1 DH Base 27.5" - Front: E13 LG1 DH Base 29"<br>Rear: 27.5", 32h, 30 mm inner width - Front: 29", 32h, 30 mm inner width                                                                                                                  |
| <b>MOYEURS</b><br>Rear: FORMULA DCL-348A - Front: FORMULA DC-711<br>Rear: 32h, sealed bearings - Front: 32h, sealed bearings                                                                                                                                           |
| <b>RAYONS</b><br>SAPIM Leader<br>J-Bend 2.0 mm, stainless, with Nylok, black                                                                                                                                                                                           |
| <b>PNEUS</b><br>Rear: MAXXIS DHR II - Front: MAXXIS Assegai<br>Rear: 27.5" x 2.4", WT.3C MaxTerra, EXO+, Tubeless Ready - Front: 29" x 2.5", WT.3C MaxTerra, EXO, Tubeless Ready                                                                                       |
| <b>TIGE DE SELLE</b><br>KS Flight+<br>34.9 mm, travel: 125 mm on S, 150 mm on M, 170 mm on L, 190 mm on XL, SouthPaw alloy remote                                                                                                                                      |
| <b>SELLE</b><br>SDG Bel Air V3<br>Steel Rails                                                                                                                                                                                                                          |
| <b>POIDS</b><br>15 kg<br>Average weight for S size, without pedals. Weight may differ slightly due to manufacturing tolerances.                                                                                                                                        |
| <b>PÉDALES</b><br>No                                                                                                                                                                                                                                                   |
| <b>COULEUR</b><br>Dirt<br>Shiny Finish                                                                                                                                                                                                                                 |
| <b>ACCESSOIRES</b><br>Down tube protector, chainstay protector, seatstay protector                                                                                                                                                                                     |

- Videos

TECH


|                                                                       |
|-----------------------------------------------------------------------|
| <b>TYPE DE VELO</b><br>ENDURO 27"/29"                                 |
| <b>CADRE</b><br>AL-6066                                               |
| <b>POIDS DU CADRE</b><br>3.9 kg                                       |
| <b>DEBATTEMENT ARRIERE</b><br>160 mm                                  |
| <b>ENTRE-AXE / COURSE</b><br>230 x 62.5 mm                            |
| <b>COMPATIBLE PIGGY BACK</b><br>Yes                                   |
| <b>BUSELURES AMORTISSEUR</b><br>20 x 10 mm                            |
| <b>HAUTEUR DE FOURCHE RECOMMANDEE / MAX</b><br>586 mm / 596 mm        |
| <b>DOUILLE DE DIRECTION</b><br>TAPERED 1-1/8" / 1-1/2"                |
| <b>JEU DE DIRECTION</b><br>Z544 / Z556                                |
| <b>LARGEUR MAXIMALE PNEUS (ETRTD)</b><br>68-584                       |
| <b>STANDARD FREIN A DISQUE</b><br>POSTMOUNT 200 mm                    |
| <b>DIAMETRE MAX DISQUE DE FREIN AR</b><br>220 mm                      |
| <b>DIAMETRE TIGE DE SELLE / COLLIER DE SELLE</b><br>34.9 mm / 38.5 mm |
| <b>BOÎTIER DE PEDALIER</b><br>B1092                                   |
| <b>ISCO</b><br>ISCO 05                                                |
| <b>DERAILLEUR AVANT</b><br>No                                         |
| <b>AXE DE ROUE ARRIERE</b><br>12 x 148 mm                             |
| <div>• Géométrie</div> <div>• Tailles</div>                           |

Contact System



| Index       | Ref                     | Nom                                                          | Photo               |
|-------------|-------------------------|--------------------------------------------------------------|---------------------|
| 1           | <b>W21EB3902</b>        | ROULEMENT ENDURO BEARINGS 3902 LLL MAX                       | 19 x 24 x 7         |
| 2           | <b>W22MTXCLLEVS</b>     | CLEVIS META SX ET TR 3.3                                     |                     |
| 3           | <b>W21METAXLERKCL</b>   | AXES BASCULEUR / CLEVIS META 3.2                             | 12 N.m              |
| 4           | <b>W21MPWTRAXLESCHL</b> | KIT COMPLET FLIP CHIP AMORTISSEUR / CLEVIS META & META POWER | 9 N.m               |
| 4A          | <b>W22MTXNSSHCL</b>     | INSERT CUSTOM AMORTISSEUR META SX, TR & POWER                |                     |
| 4B          | <b>W22MTXFLIPCHIP</b>   | FLIP CHIP META SX, TR & POWER                                |                     |
| 4C          | <b>W22MTXAXLESCHL</b>   | AXES AMORTISSEUR / CLEVIS META SX, TR & POWER                | 8 N.m               |
| 5           | <b>W21METAXLERKRT</b>   | AXES BASCULEUR / TRIANGLE AVANT META 2021-2023               | 12 N.m              |
| 6           | <b>W22MTXROCKER</b>     | BASCULEUR META SX                                            |                     |
| 7           | <b>W21METALOCKRING</b>  | ECROU BLOQUE ROULEMENT META 2021-2022                        | 5 N.m               |
| 8           | <b>W21METAXLERSSS</b>   | AXES BASCULEUR / HAUBANS META 2021-2023                      | 12 N.m              |
| BEARING KIT | <b>W21EBMETA</b>        | ROULEMENTS ENDURO BEARINGS META                              | 2 x 3904 / 8 x 3902 |

Chainstays / Seatstays

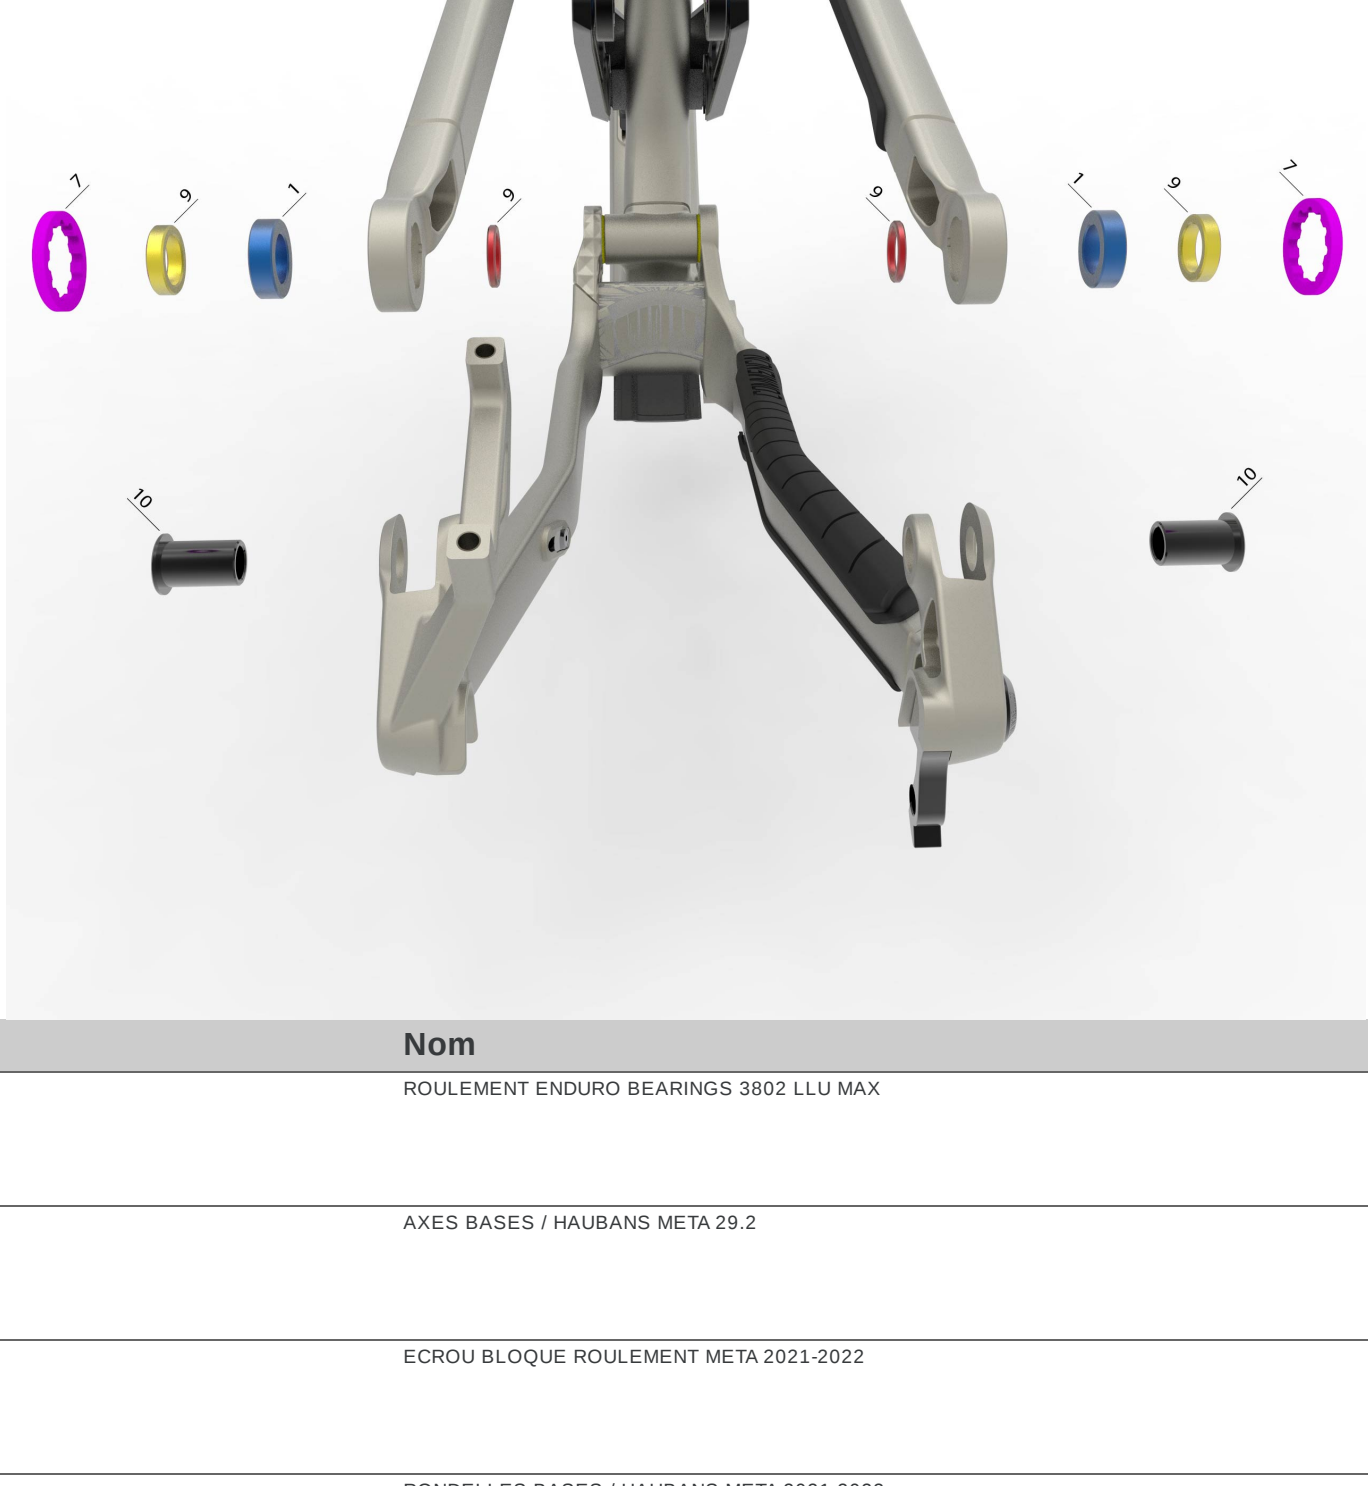


| Index       | Ref                    | Nom                                      | Photo               |
|-------------|------------------------|------------------------------------------|---------------------|
| 1           | <b>W21EB3902</b>       | ROULEMENT ENDURO BEARINGS 3902 LLL MAX   | 19 x 24 x 7         |
| 1F          | <b>W21METAXLERSSSS</b> | AXES SASSS / HAUBANS META 20.7           | 12 N.m              |
| 7           | <b>W21METALOCKRING</b> | ECROU BLOQUE ROULEMENT META 2021-2022    | 5 N.m               |
| 8           | <b>W21METAXLERSSSS</b> | ROUEILLES SASSS / HAUBANS META 2021-2023 |                     |
| BEARING KIT | <b>W21EBMETA</b>       | ROULEMENTS ENDURO BEARINGS META          | 2 x 3904 / 8 x 3902 |

Dropouts



| Index | Ref                      | Nom                                                                 | Photo  |
|-------|--------------------------|---------------------------------------------------------------------|--------|
| 11    | <b>W18AXLEWHEELBOOST</b> | AXE DE ROUE ARRIERE - 10/100/10/10/10 BOOST                         | 12 N.m |
| 11    | <b>W21METARHR</b>        | PARTE DE DERAILLEUR META SX, TR & SX 2021-2022                      | 10 N.m |
| 17    | <b>W18CHCABLEGUIDEB</b>  | GUIDE CABLE INFRIEUR CLASH META, META POWER, FSL, T.E.M.P.O., DAVIS | 8 N.m  |

Downtube

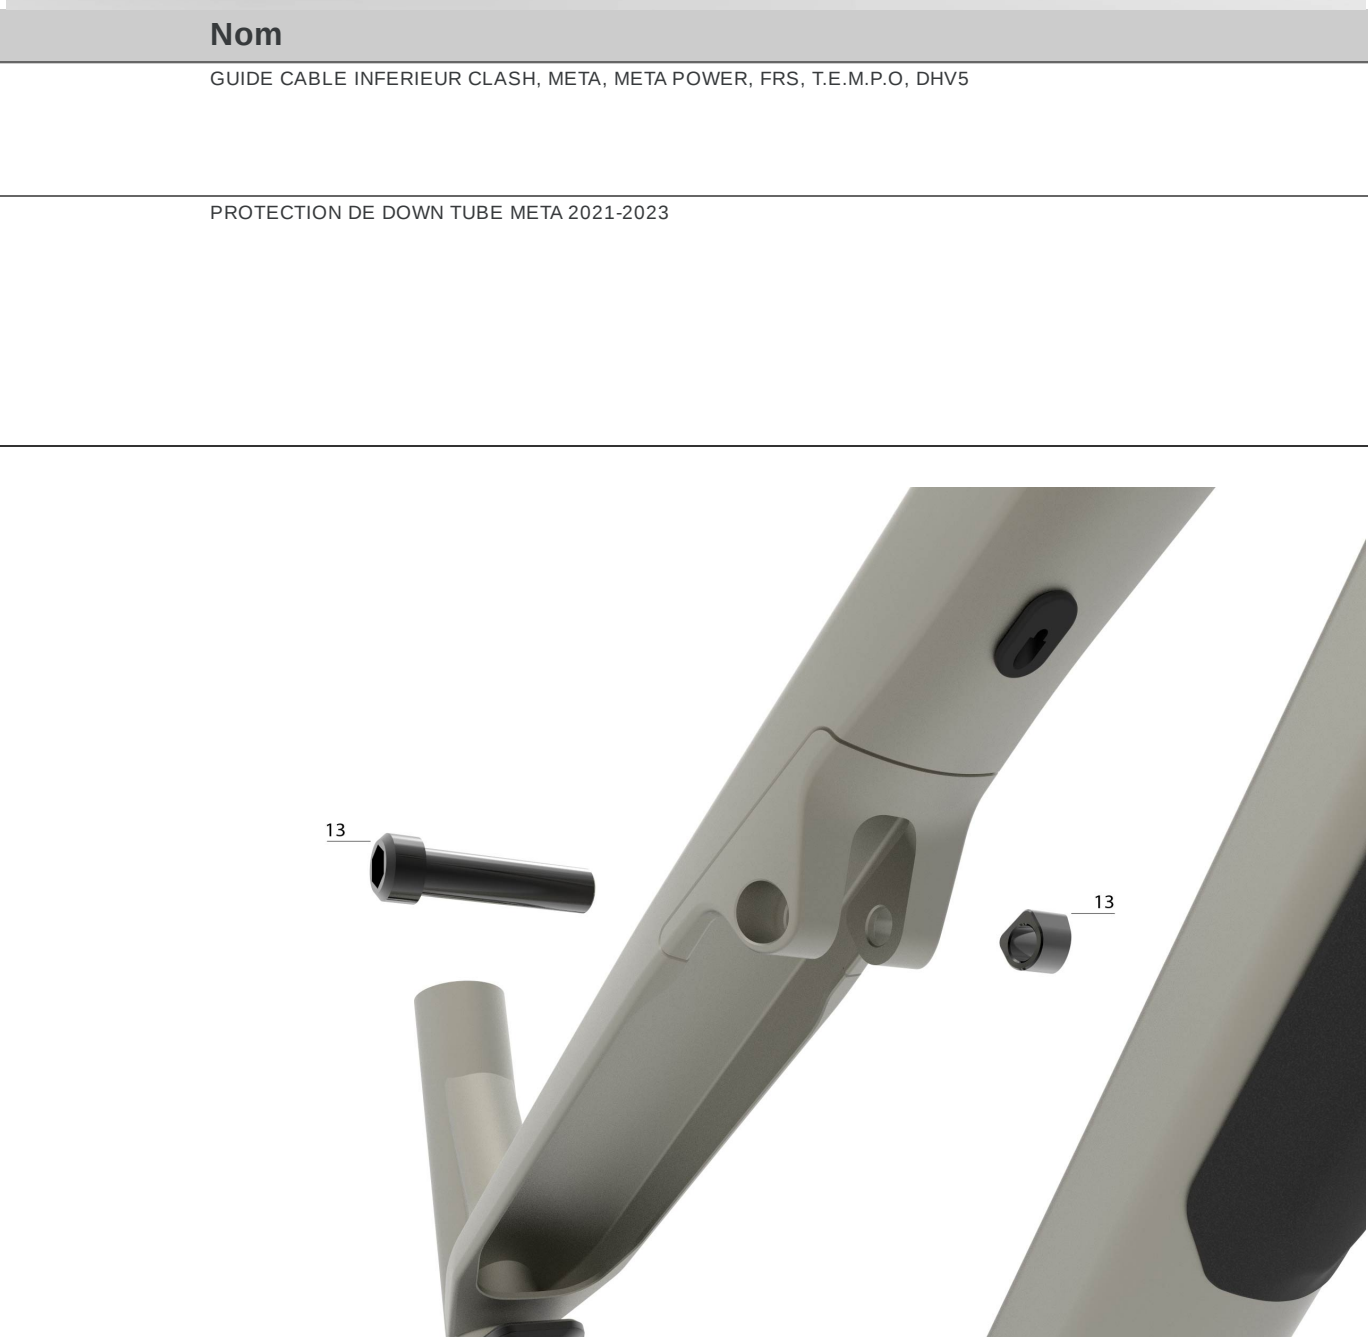


| Index | Ref                     | Nom                                                                 | Photo |
|-------|-------------------------|---------------------------------------------------------------------|-------|
| 17    | <b>W18CLCABLEGUIDEB</b> | GUIDE CABLE INFRIEUR CLASH META, META POWER, FSL, T.E.M.P.O., DAVIS | 8 N.m |
| 17    | <b>W21METAPROTECTD</b>  | PROTECTION DE DOWN TUBE META 2021-2023                              | 3 N.m |

TopTube




| Index | Ref                    | Nom                                                 | Photo |
|-------|------------------------|-----------------------------------------------------|-------|
| 17    | <b>W21METAXLESKITT</b> | KIT AXE AMORTISSEUR / TUBE SUPERIEUR META 2021-2023 | 9 N.m |

Main Pivot

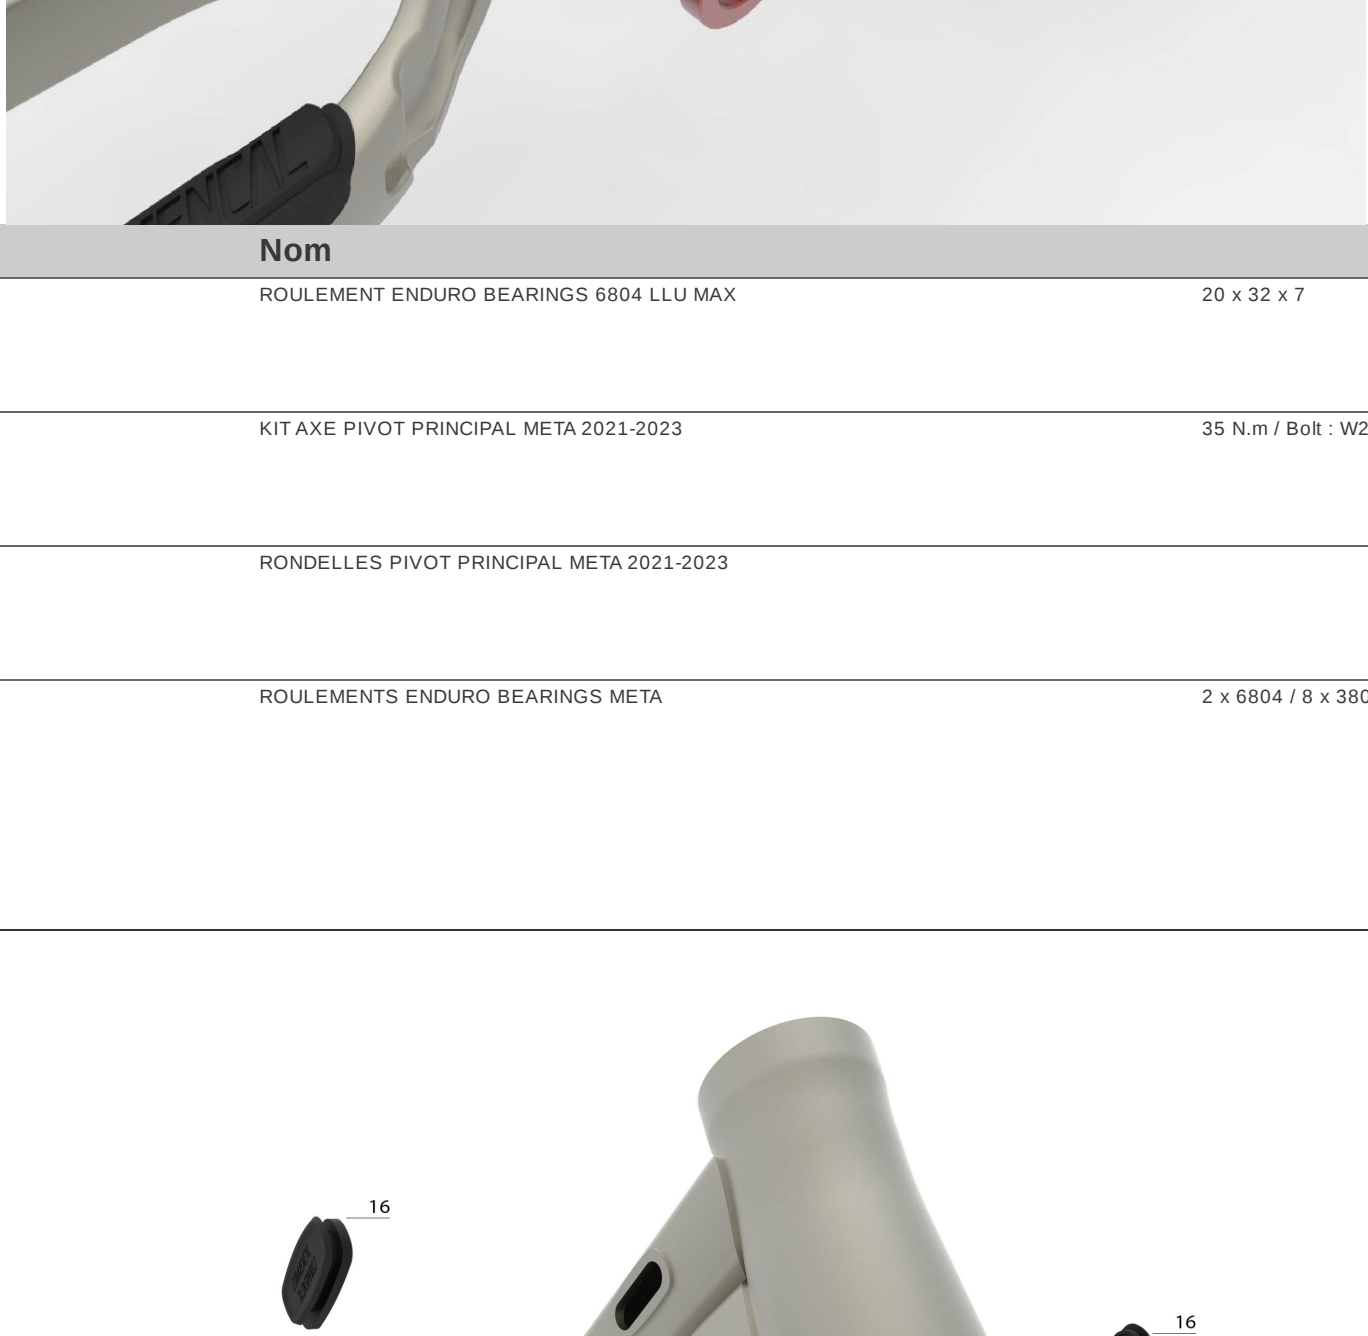


| Index       | Ref                     | Nom                                      | Photo                                |
|-------------|-------------------------|------------------------------------------|--------------------------------------|
| 1           | <b>W19EB0804</b>        | ROULEMENT ECROU DECHARGE 0804 LLL MAX    | 25 x 20 x 7                          |
| 14          | <b>W21METAXALEMP</b>    | KIT AXE PIVOT PRINCIPAL META 2021-2023   | 10 N.m / 100 N.m / 100 N.m / 100 N.m |
| 14          | <b>W21METAXWASHERMP</b> | ROUEILLES PIVOT PRINCIPAL META 2021-2023 |                                      |
| BEARING KIT | <b>W21EBMETA</b>        | ROULEMENTS ENDURO BEARINGS META          | 2 x 3904 / 8 x 3902                  |

Seals

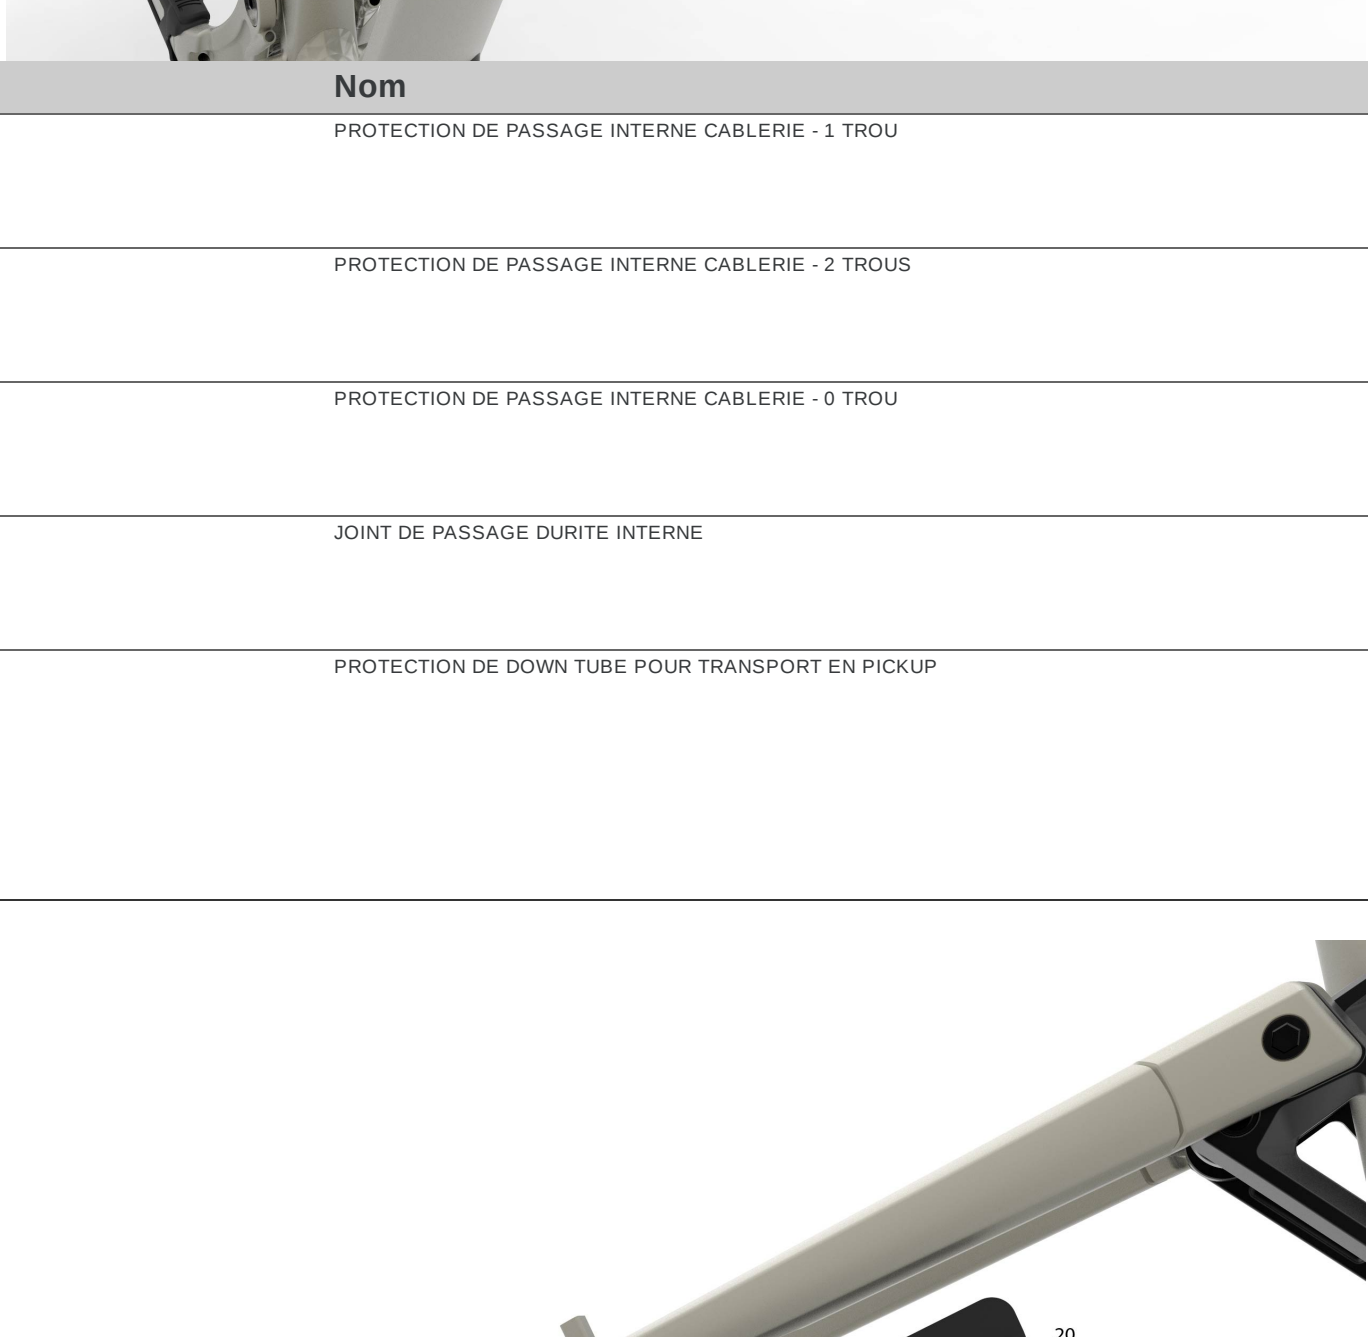

| Index | Ref                    | Nom                                              | Photo |
|-------|------------------------|--------------------------------------------------|-------|
| 14    | <b>W18SEALZH</b>       | PROTECTION DE PASSAGE INTERNE CABLES - 1 TROUS   |       |
| 14    | <b>W18SEALZH</b>       | PROTECTION DE PASSAGE INTERNE CABLES - 3 TROUS   |       |
| 14    | <b>W18SEALZH</b>       | PROTECTION DE PASSAGE INTERNE CABLES - 5 TROUS   |       |
| 17    | <b>W18NOSESEAL</b>     | JOINT DE PASSAGE COURTE INTERNE                  |       |
| 14    | <b>W18PROTECTCUPUP</b> | PROTECTION DE DOWN TUBE POUR TRANSPORT EN PICKUP |       |

Protectors

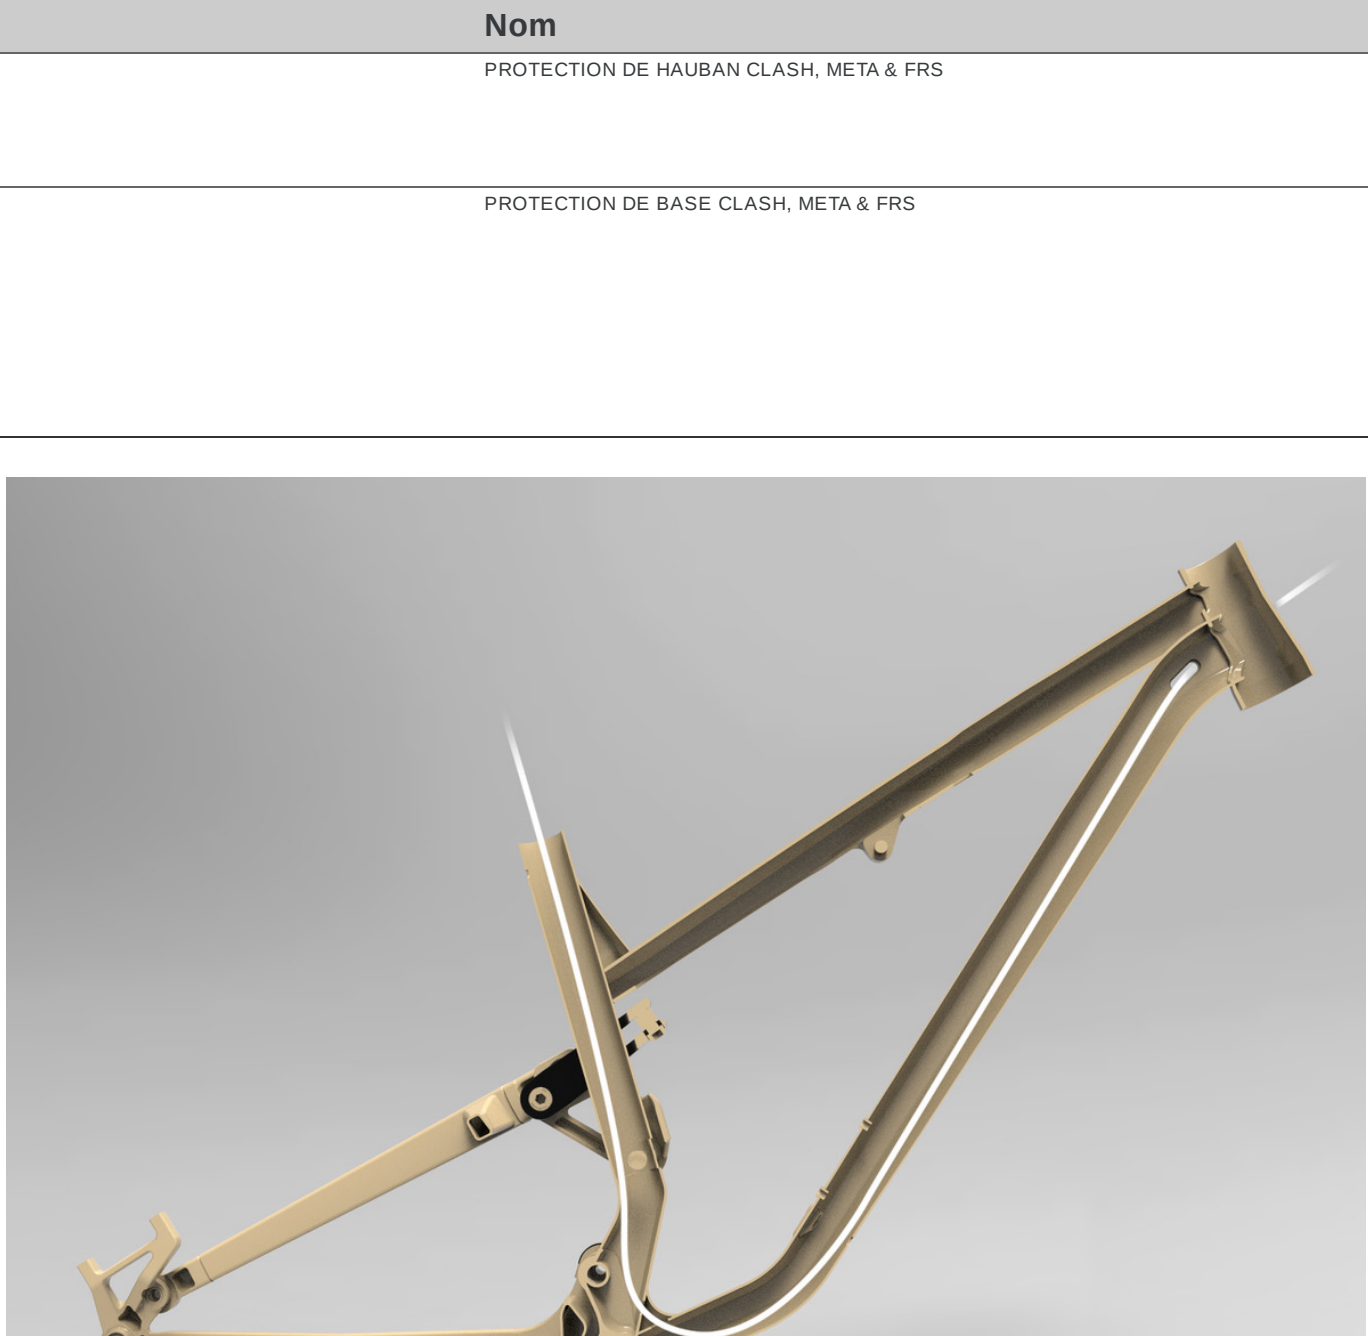

| Index | Ref                   | Nom                                 | Photo |
|-------|-----------------------|-------------------------------------|-------|
| 21    | <b>W18CHPROTECTCS</b> | PROTECTION DE BASE CLASH META SIS   |       |
| 21    | <b>W18CHPROTECTCS</b> | PROTECTION DE BASE CLASH META & PRO |       |

Dropper Post Routing



| Index | Ref | Nom | Photo |
|-------|-----|-----|-------|
|-------|-----|-----|-------|