

2015

COMMENCAL META SX ESSENTIAL 26 PINK



SPECS

FRAME	2015 META SX 26", Travel 160mm, 6066 Triple Butted hydroformed, Piggyback ready chainstay
SHOCK	ROCKSHOX Monarch Plus RC3, 200x57, Travel 160mm, 3 positions Lock/Platform/Open
FORK	ROCKSHOX Pike RCT3 Solo Air Low speed compression and 3 positions adjustment, Travel 160mm, 15mm axle, Tapered
HEADSET	Semi integrated, tapered ZS44/56, 1.5 crown race, sealed bearing, alloy cups
STEM	RIDE ALPHA, Alloy 2014 Forged, 50mm, 0° rise, Ø31.8mm
BAR	RIDE ALPHA, Alloy 7075 double butted, 30mm rise, 760mm, Ø31.8mm
GRIPS	COMMENCAL lock on, Ø30mm, soft compound, Neon Pink logo
BRAKES	SRAM Guide R 180mm/180mm, with matchmaker
SHIFTERS	SRAM X9 1x10 spd
FRONT / REAR MECH	- / SRAM X9 10 spd Type II
BOTTOM BRACKET	RACE FACE BB92, sealed bearings
CRANKSET	RACE FACE Evolve, 1x10, 34t Narrow wide chainring, 170mm on S, 175mm on M/L/XL
CHAIN / CHAIN DEVICE	KMC X10 / E13 LS1
CASSETTE	SRAM PG1020 11-36 t, black
RIMS	RIDE ALPHA 26/// 32H, 30mm, sleeved joint, Tubeless ready
HUBS	RIDE ALPHA 32h, sealed bearings version
SPOKES	Spoke Steel 1,8mm black - nipple brass 12mm black
TYRES	Front : MAXXIS High Roller II 2.3, 60 Tpi, Kevlar Bead, EXO, Tubeless ready, Rear : MAXXIS High Roller II 2.3, 60 Tpi, Kevlar Bead, Exo
SEATPOST	KINDSHOCK Lev integra, 125mm travel, Ø31,6mm, 385mm, KGP lever
SADDLE	COMMENCAL Meta SX, Cmo rails

TECH

BICYCLE TYPE	Full suspension Enduro
FRAME MATERIAL	NEC + ULTRA SL (Aluminium 6066 Tripel Butted)
SHOCK TRAVEL	160mm
SHOCK LENGTH / STROKE	200x57
PIGGY BACK SHOCK COMPATIBLE	Yes
SHOCK SPACER DIMENSION	22,2x10mm front and rear
RECOMMENDED / MAX FORK HEIGHT	545mm / 555mm
HEADSET DIMENSION	Tapered 1"1/8 / 1.5"
HEADSET TYPE	Semi-integrated ZS44 / ZS56
MAXIMUM TYRE DIMENSION (ETRT0)	57mm
DISC BRAKE STANDARD	Postmount 180mm
REAR ROTOR MAX SIZE	180mm
SEATPOST / SEAT CLAMP DIAMETER	31,6mm / 34,9mm
BOTTOM BRACKET TYPE	Press Fit BB92
ISCG	ISCG05
FRONT DERAILLEUR TYPE	High Direct Mount Top Pull
REAR HUB COMPATIBILITY	142x12mm

SPOKE LENGTH


WHEEL	NON DRIVE SIDE / LEFT	DRIVE SIDE / RIGHT
FRONT	261 mm	257 mm
REAR	259 mm	258 mm

Dropouts




Index	Ref	Nom		Photo
1	W14AXLESSCH	AXE CONTACT SYSTEM META V3 ET SUPREME V3	10-15 N.m	
2	W21EBFURIOUS	ROULEMENTS ENDURO BEARINGS META V3, SUPREME DH V3, V4, FRS, CLASH	2 x 6804 / 6 x 6902	
3	W12WASHCHST	KIT RONDELLES CONTACT SYSTEM META V3 ET SUPREME V3		
4	W12RHRMETA	PATTE DE DERAILLEUR META V3 / SUPREME JR & 24	15 N.m	

Main Pivot

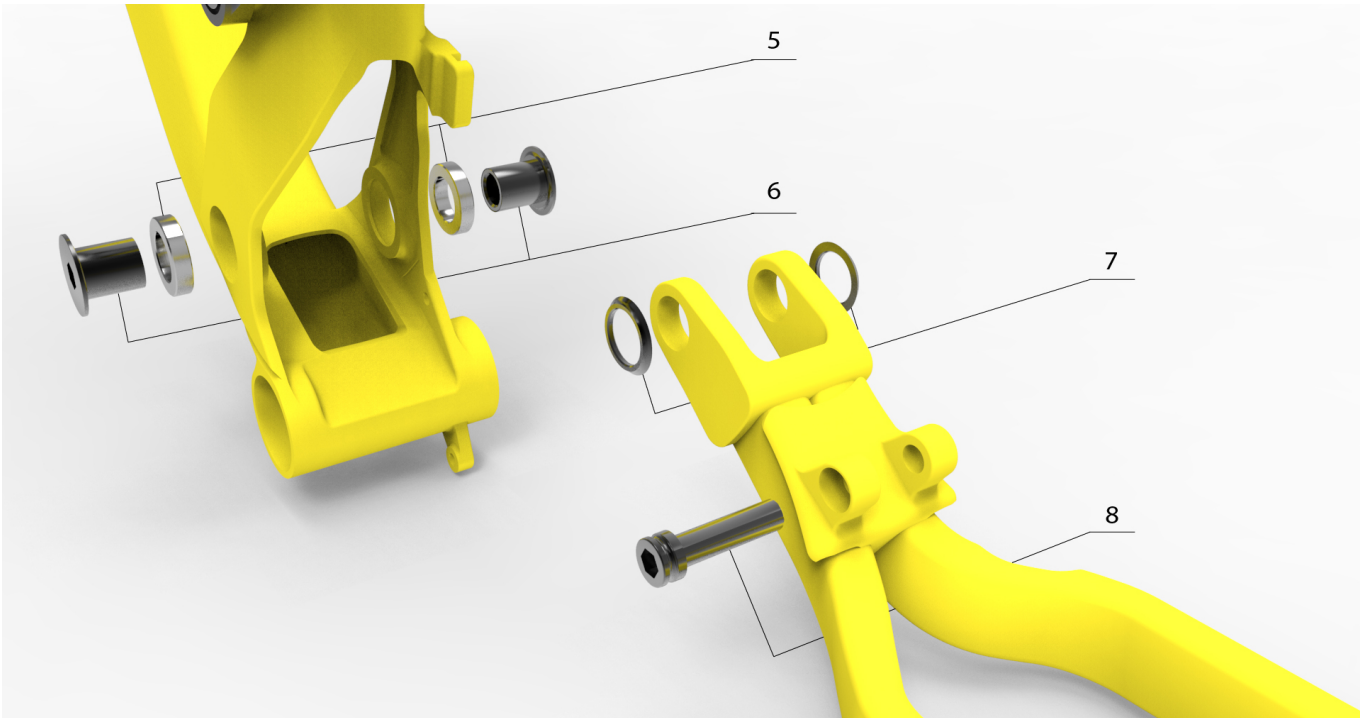

Index	Ref	Nom		Photo
5	W21EBFURIOUS	ROULEMENTS ENDURO BEARINGS META V3, SUPREME DH V3, V4, FRS, CLASH	2 x 6804 / 6 x 6902	
6	W14AXLEMPNPTPB	AXE DE PIVOT PRINCIPAL POUR BASES META PIGGY BACK	25 N.m	
7	W12WASHKITMP	RONDELLES PIVOT PRINCIPAL META V3 ET SUPREME V3		
8	W12AXLESHYO	AXE AMORTISSEUR / TRIANGLE ARRIERE SUPREME DH V3 / META V3	12 N.m	

Contact System

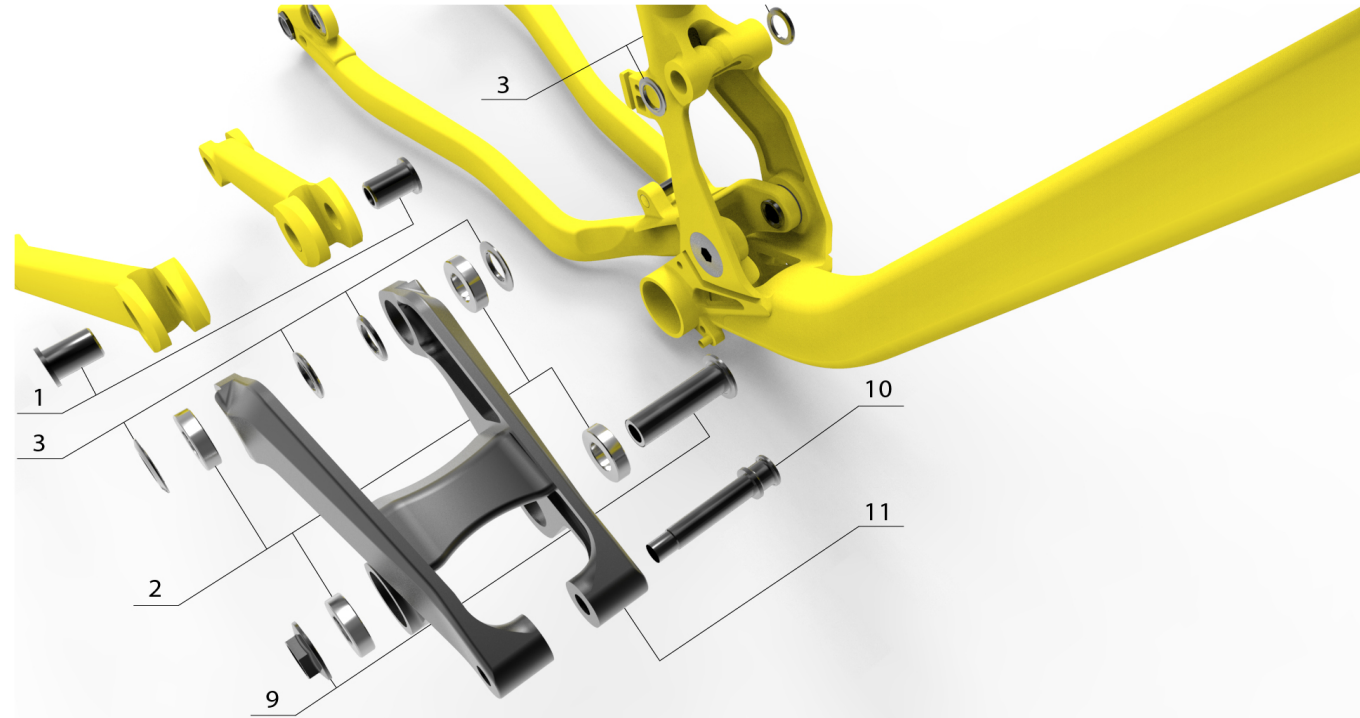

Index	Ref	Nom		Photo
1	W14AXLESSCH	AXE CONTACT SYSTEM META V3 ET SUPREME V3	10-15 N.m	
10	W12AXLESHLI	AXE AMORTISSEUR / BASCULEUR SUPREME DH V3 / META V3	12 N.m	
11	W13ROCKERSX	KIT BASCULEUR POUR META SX		
2	W21EBFURIOUS	ROULEMENTS ENDURO BEARINGS META V3, SUPREME DH V3, V4, FRS, CLASH	2 x 6804 / 6 x 6902	
3	W12WASHCHST	KIT RONDELLES CONTACT SYSTEM META V3 ET SUPREME V3		
9	W12AXLELINK	AXE BASCULEUR / TRIANGLE AVANT + VIS POUR SUPREME DH V3 et META V3	10-15 N.m	