

2021

COMMENCAL CLASH SIGNATURE




SPECS

- Specs
 - CADRECLASH, 170 mm travel
 - 27.5", Alloy 6069, triple butted tubes, T4, T6, Enduro bearings
 - AMORTISSEURFOX DHX2 Factory
 - 230 x 65 mm, HSC, LSC, HSR, LSR, 2-position adjustment. Spring rates: 400 lbs on S, 450 lbs on M, 500 lbs on L, 550 lbs on XL
 - FOURCHEFOX 38 Factory, 180 mm travel
 - 27.5", Grip 2 damper, HSC, LSC, HSR, LSR, Boost (15 x 110 mm), 37 mm offset
 - JEU DE DIRECTIONACROS ZS44/ZS56
 - Alloy cups, sealed bearings
 - POTENCERIDE ALPHA Freeride 40
 - 40 mm extension, 31.8 mm
 - CINTREIDE ALPHA R27
 - 31.8 mm, 780 mm width, 27 mm rise, Alloy 7050
 - GRIPSRIDE ALPHA DH
 - Ultra-soft compound, single clamp, black
 - FREINSHIMANO XT, 4 pistons, I-Spec EV compatible
 - Rotor: SHIMANO RT-MT900 203 mm, Centerlock, Ice Technology Freeza
 - SHIFTERSSHIMANO XT
 - 12 sp
 - GUIDE CHAINE-
 - DERAILLEURSHIMANO XT
 - 12 sp
 - BOITIER DE PEDALIERSHIMANO BBMT800
 - Pressfit
 - PEDALIERSHIMANO XT, 170 mm crank arms, Boost
 - Chainring: SHIMANO XT, 34t, Dynamic Chain Engagement + Technology
 - CHAINESHIMANO XT
 - 12 sp
 - CASSETTESHIMANO XT
 - 12sp, 10-51t
 - JANTESDT SWISS EX511
 - 27.5", 28h, 30 mm inner width
 - MOYEURRear: DT SWISS 350 - Front: DT SWISS 350
 - Rear: 28h, sealed bearings, 12 x 148 mm, MicroSpline, 36t ratchet, black - Front: 28h, sealed bearings, 15 x 110 mm, black
 - RAYONSDT SWISS Competition
 - J-Bend, 2.0-1.8-2.0 mm, double butted, stainless, with Nylok, black
 - PNEUSRear: MAXXIS Dissector - Front: MAXXIS Assegai
 - Rear: 27.5"x2.4" WT, 3C, EXO+, Tubeless Ready - Front: 27.5"x2.5" WT, 3C, EXO+, Tubeless Ready
 - TIGE DE SELLEKS Lev Integra
 - 34.9 mm, travel: 125 mm on S, 150 mm on M, 175 mm on L, 200 mm on XL, SouthPaw alloy remote
 - SELLEWTB Silverado
 - Narrow shape, Cr-Mo rails
 - POIDS15.8 kg
 - Average weight for S size, without pedals. Weight may differ slightly due to manufacturing tolerances.
 - PEDALESNo
 - COULEURDirt
 - Shiny finish
 - ACCESSOIRESDown tube protector, chainstay protector, seatstay protector, shuttle pad
- Vidéos

TECH


- Tech
 - TYPE DE VELOEnduro / Freeride
 - CADREAI 6069T6
 - POIDS DU CADRE4 kg
 - DEBATTEMENT ARRIERE170 mm
 - ENTRE-AXE / COURSE230 x 65 mm
 - COMPATIBLE PIGGY BACKYes
 - BUSELURES AMORTISSEUR30 x 10 mm / 20 x 8 mm
 - HAUTEUR DE FOURCHE RECOMMANDEE / MAX572 mm / 586 mm
 - DOUILLE DE DIRECTIONtapered
 - JEU DE DIRECTIONZS44/ZS56
 - LARGEUR MAXIMALE PNEUS (ETRTO)65 mm
 - STANDARD FREIN A DISQUEPostmount 200 mm
 - DIAMETRE MAX DISQUE DE FREINAR223 mm
 - DIAMETRE TIGE DE SELLE / COLLIER DE SELLE34,9 mm / 38,5 mm
 - BOITIER DE PEDALIERPress Fit BB 89,5
 - ISCGISCG05
 - DERAILLEUR AVANTNo
 - AXE DE ROUE ARRIERE148 x 12 mm
- Géometrie
- Tailles
- News

Contact System

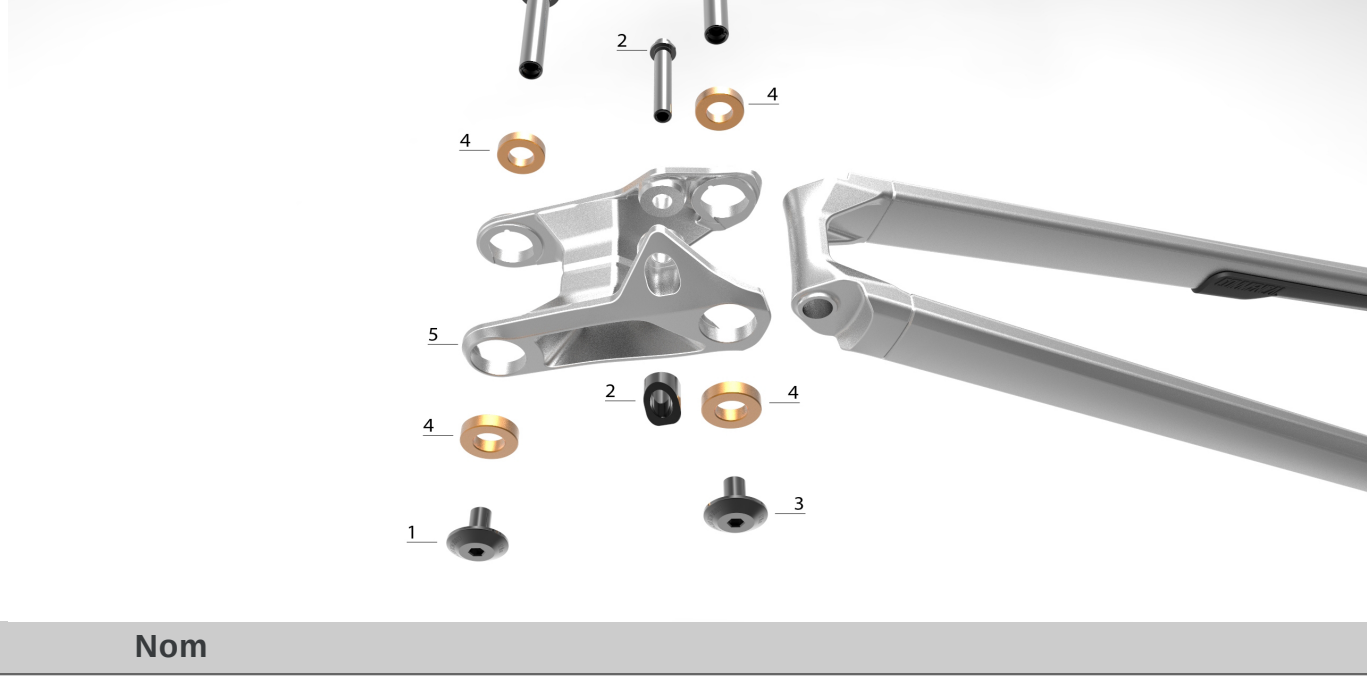


Index	Ref	Nom		Photo
1	W20FUV3AXLERKFT	AXE BASCULEUR / TRIANGLE AVANT FURIOUS V3	12 N.m	
2	W18DH29AXLERKSH	AXE AMORTISSEUR / BASCULEUR SUPREME DH V3 / CLASH	9-12 N.m	
2	W21CLHSHINS	INSERT AXE AMORTISSEUR CLASH V2		
3	W21CLHAXLERKSS	AXE BASCULEUR / HAUBANS CLASH V2	12 N.m	
4	W19EB6902	ROULEMENT ENDURO BEARINGS 6902 LLU MAX	15 x 28 x 7	
5	W21CLHROCKER	BASCULEUR CLASH V2		
BEARING KIT	W21EBFURIOUS	ROULEMENTS ENDURO BEARINGS META V3, SUPREME DH V3, V4, FRS, CLASH	2 x 6804 / 6 x 6902	

Main Pivot

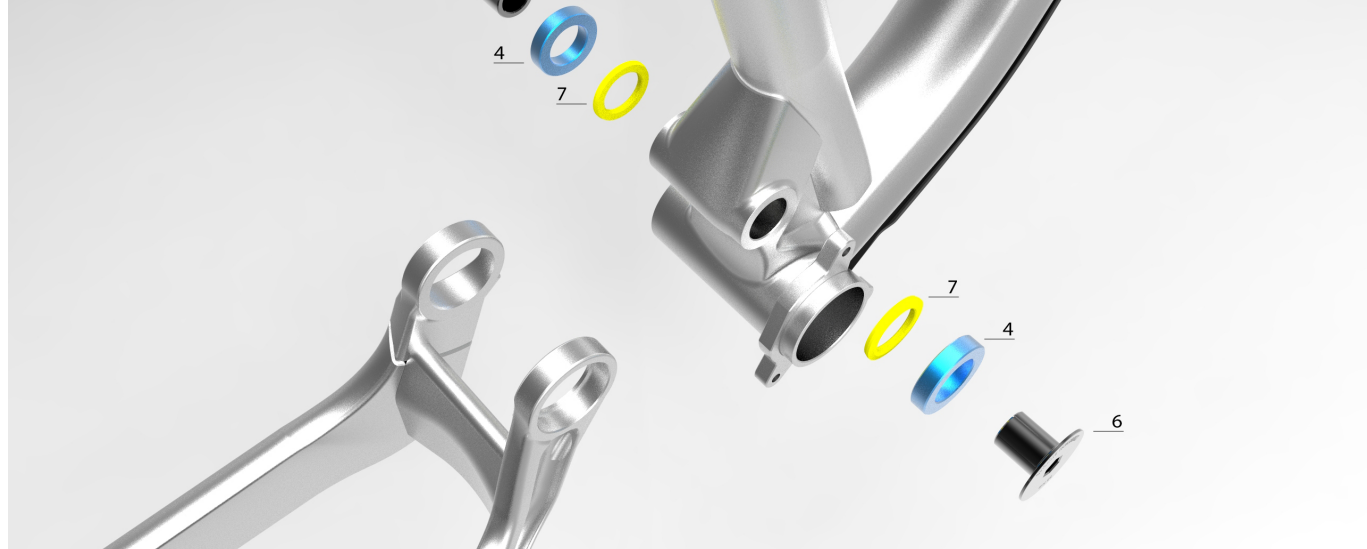


Index	Ref	Nom		Photo
4	W19EB6804	ROULEMENT ENDURO BEARINGS 6804 LLU MAX	20 x 32 x 7	
6	W19M29AXLEMP	AXE PIVOT PRINCIPAL META 29 ET CLASH	30-35 N.m	
7	W19M29WASHERMP	RONDELLES PIVOT PRINCIPAL META 29 ET CLASH		
BEARING KIT	W21EBFURIOUS	ROULEMENTS ENDURO BEARINGS META V3, SUPREME DH V3, V4, FRS, CLASH	2 x 6804 / 6 x 6902	

Chainstays / Seatstays

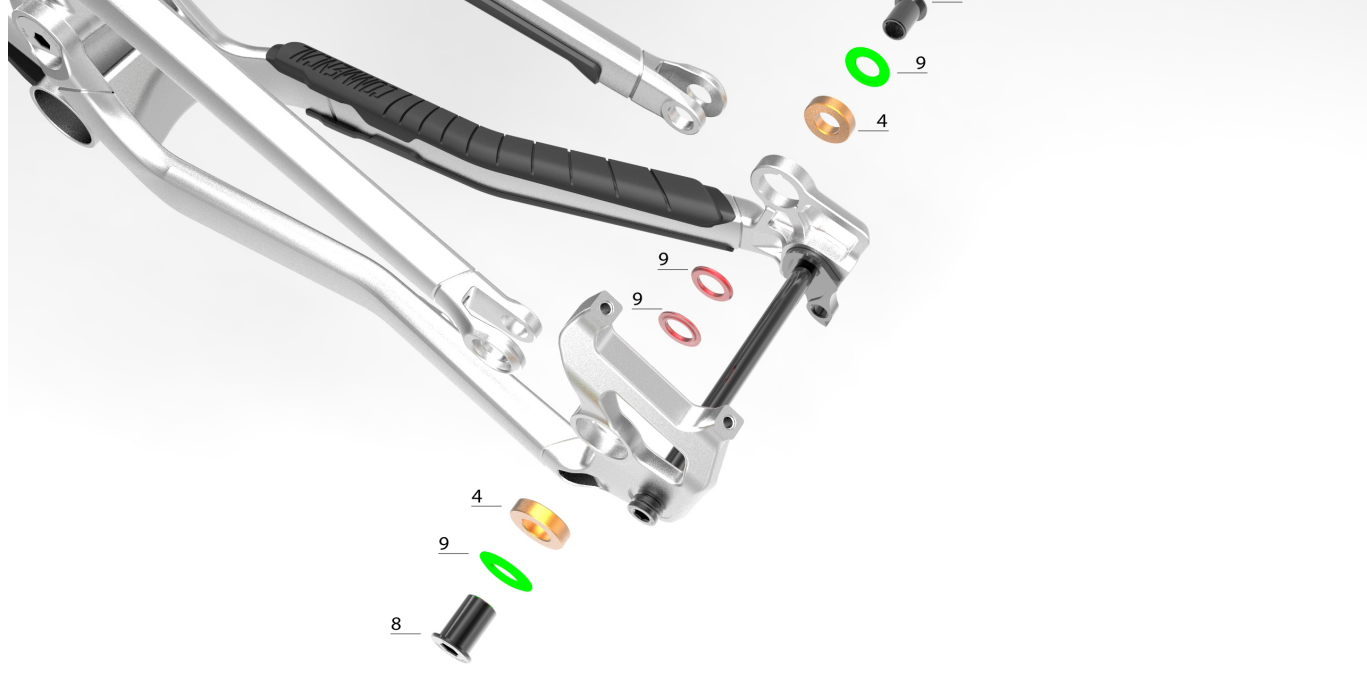

Index	Ref	Nom		Photo
4	W19EB6902	ROULEMENT ENDURO BEARINGS 6902 LLU MAX	15 x 28 x 7	
8	W20FUV3AXLECS	AXE HAUBAN FURIOUS V3	15 N.m	
9	W20FUV3WASHERCS	RONDELLES CONTACT SYTEM FURIOUS V3		
BEARING KIT	W21EBFURIOUS	ROULEMENTS ENDURO BEARINGS META V3, SUPREME DH V3, V4, FRS, CLASH	2 x 6804 / 6 x 6902	

Dropouts

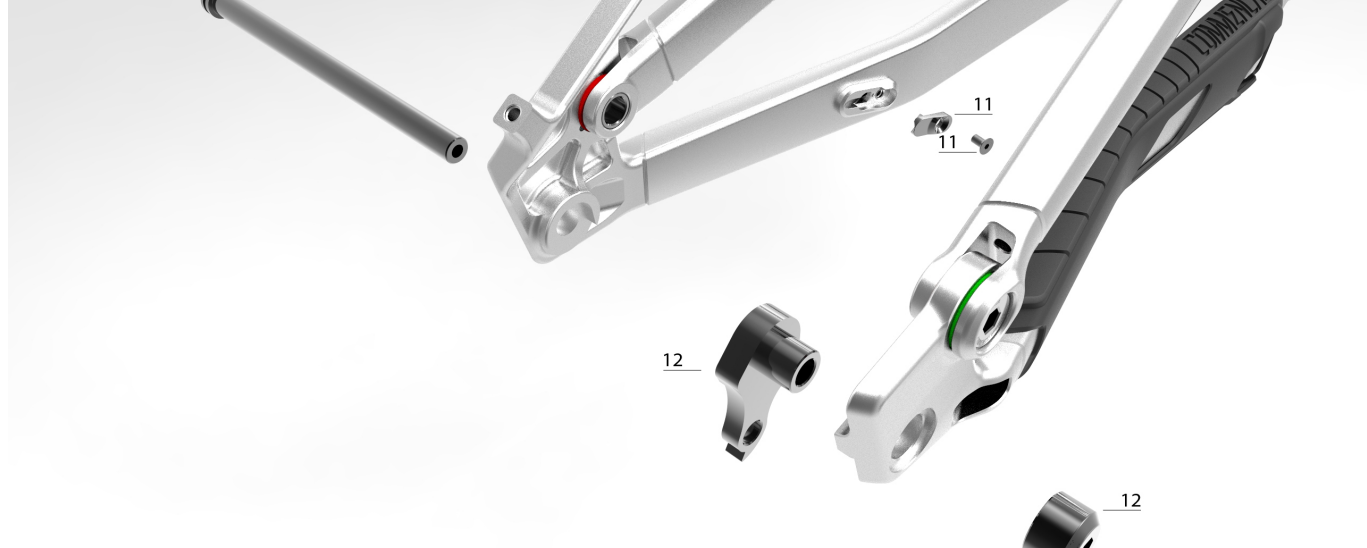


Index	Ref	Nom		Photo
10	W19AXLEWHEELBOOST	AXE DE ROUE ARRIERE - STANDARD MAXLE BOOST	12 N.m	
11	W19CLHCABLEGUIDEB	GUIDE CABLE INFERIEUR CLASH, META, META POWER, FRS, TE M.P.O., DHVS	9 N.m	
12	W21CLHRHR	PATTE DE DERAILLEUR CLASH V2	10 N.m	

Downtube




Index	Ref	Nom		Photo
13	W21CLHINSRKFT	FLIP CHIP CLASH V2		
14	W20FUV3CABLEGUIDET	GUIDE CABLE SUPERIEUR FRS V3, CLASH V2	3 N.m	

Seals

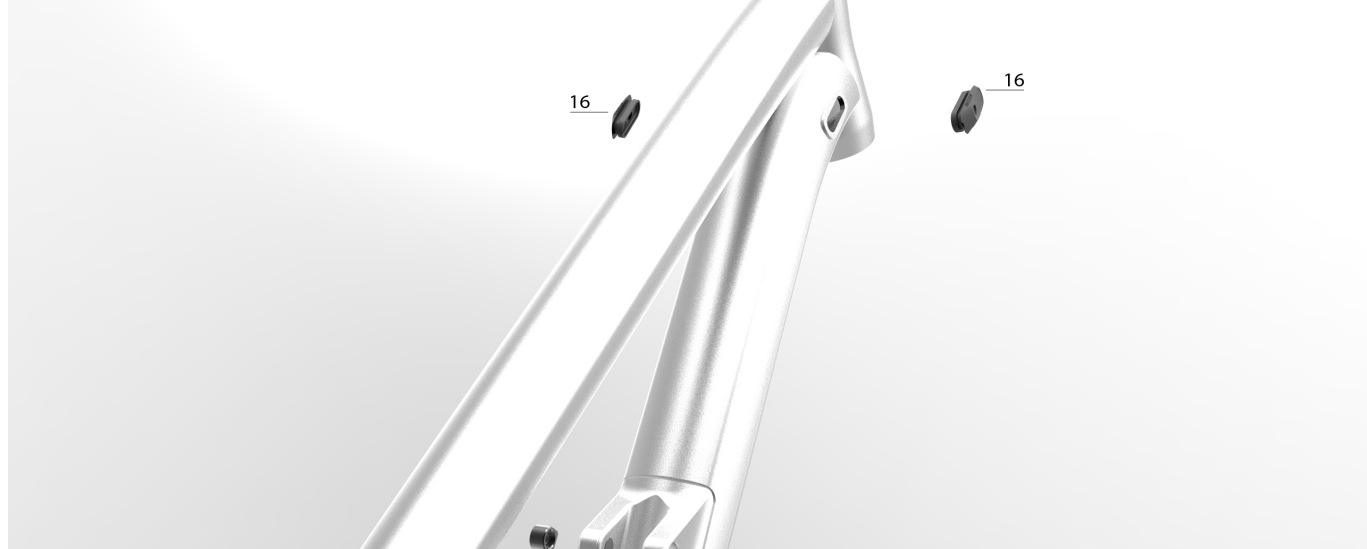

Index	Ref	Nom		Photo
15	W16DHV4SHOCKAXLE	AXE AMORTISSEUR / TRIANGLE AVANT SUPREME DH FURIOUSCLASH	9 N.m	
16	W18SEAL1H	PROTECTION DE PASSAGE INTERNE CABLERIE - 1 TROU		
16	W18SEAL2H	PROTECTION DE PASSAGE INTERNE CABLERIE - 2 TROUS		
16	W18SEALNOH	PROTECTION DE PASSAGE INTERNE CABLERIE - 0 TROU		

Protectors

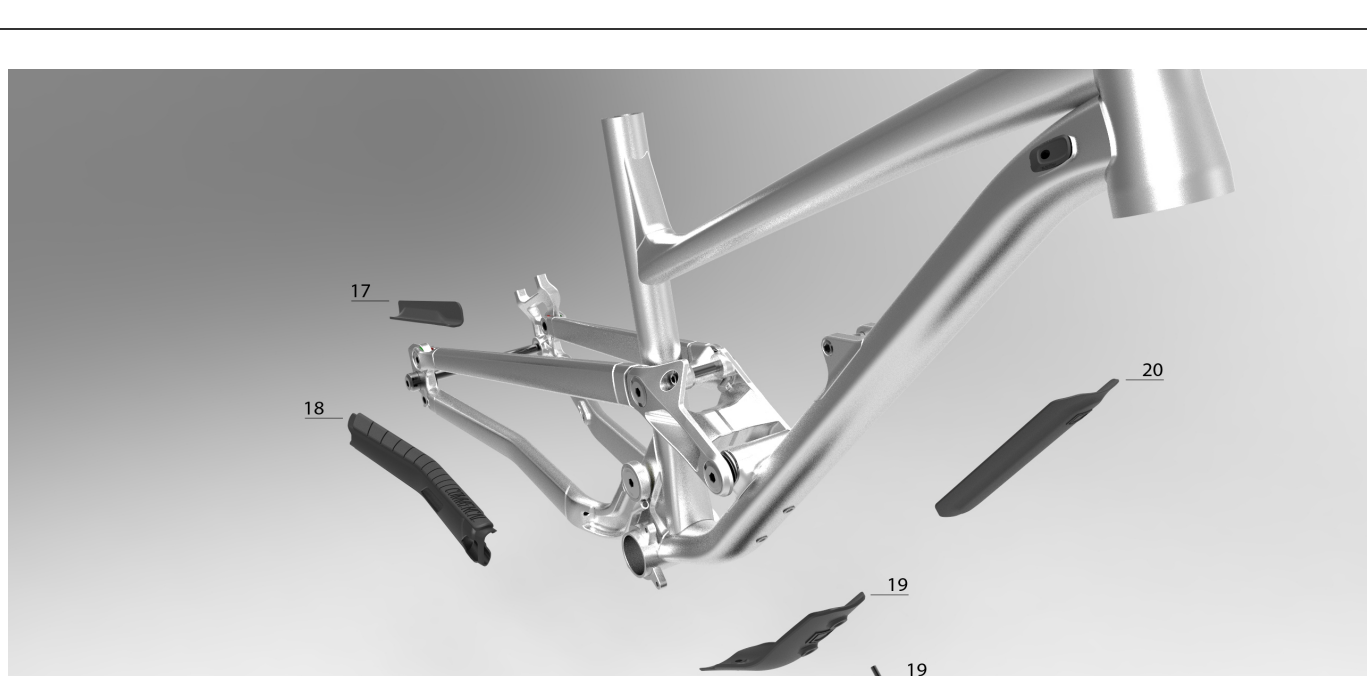

Index	Ref	Nom		Photo
17	A16SSTPROTECTETA4	PROTEGE HAUBAN META, CLASH ET META POWER		
18	W19CLHPROTECCS	PROTECTION DE BASE CLASH, META & FRS		
19	W21CLHPROTECDT	PROTECTION DE DOWNTUBE CLASH V2	3 N.m	
20	W19PROTECPICKUP	PROTECTION DE DOWNTUBE POUR TRANSPORT EN PICKUP		

Dropper Post Routing



Index	Ref	Nom		Photo
-------	-----	-----	--	-------