

2015

COMMENCAL META SX ORIGIN 26 PINK 2015



SPECS

FRAME	2015 META SX 26», Travel 160mm, 6066 Triple Butted hydroformed, Piggyback ready chainstay
SHOCK	XFUSION O2 RLX, 200x57, Travel 160mm, 3 positions Lock/Platform/Open
FORK	XFUSION Slant 26», RL2, Travel 160mm, tapered steerer,15mm axle
HEADSET	Semi integrated,tapered Z544/56, 1.5 crown race, sealed bearing, alloy cups
STEM	RIDE ALPHA, Alloy 2014 Forged, 50mm, 0° rise, Ø31,8mm
BAR	RIDE ALPHA, Alloy 7075 double butted, 30mm rise, 760mm, Ø31,8mm
GRIPS	COMMENCAL lock on, Ø30mm, soft compound, Neon Pink logo
BRAKES	SRAM DBS 180mm/180mm, with matchmaker
SHIFTERS	SRAM X7 1x10 spd
FRONT / REAR MECH	- / SRAM X7 10 spd Type II
BOTTOM BRACKET	RACE FACE BB92, sealed bearings
CRANKSET	RACE FACE Ride, 1x10, 34t Narrow Wide Chaining, 170mm on S, 175mm on ML/XL
CHAIN / CHAIN DEVICE	KMC X10 / E13 LS1
CASSETTE	SRAM PG1020 11-36 t, black
RIMS	RIDE ALPHA 26» 32H, 30mm, sleeved joint, Tubeless ready
HUBS	RIDE ALPHA 32h, sealed bearings version
SPOKES	Spoke Steel 1,8mm black - nipple brass 12mm black
TYRES	Front : MAXXIS High Roller II 2.3, 60 Tpi, Kevlar Bead, Exo, Tubeless ready Rear : MAXXIS High Roller II 2.3, 60 Tpi, Kevlar Bead, Exo, Tubeless ready
SEATPOST	COMMENCAL Alloy No offset one piece design, Ø31,6mm, 350mm
SADDLE	COMMENCAL Meta SX by Velo, Cmo rails


TECH

BICYCLE TYPE	Full suspension Enduro
FRAME MATERIAL	NEC + ULTRA SL (Aluminium 6066 Triple Butted)
SHOCK TRAVEL	160mm
SHOCK LENGTH / STROKE	200x57
PIGGY BACK SHOCK COMPATIBLE	Yes
SHOCK SPACER DIMENSION	22.2x10mm front and rear
RECOMMENDED / MAX FORK HEIGHT	545mm / 555mm
HEADSET DIMENSION	Tapered 1"1/8 / 1.5"
HEADSET TYPE	Semi-integrated Z544 / Z556
MAXIMUM TYRE DIMENSION (ETRTO)	57mm
DISC BRAKE STANDARD	Postmount 180mm
REAR ROTOR MAX SIZE	180mm
SEATPOST / SEAT CLAMP DIAMETER	31,6mm / 34,9mm
BOTTOM BRACKET TYPE	Press Fit BB92
ISCG	ISCG05
FRONT DERAILLEUR TYPE	High Direct Mount Top Pull
REAR HUB COMPATIBILITY	142X12mm

SPOKE LENGTH


WHEEL	NON DRIVE SIDE / LEFT	DRIVE SIDE / RIGHT
FRONT	261 mm	257 mm
REAR	259 mm	258 mm

Dropouts

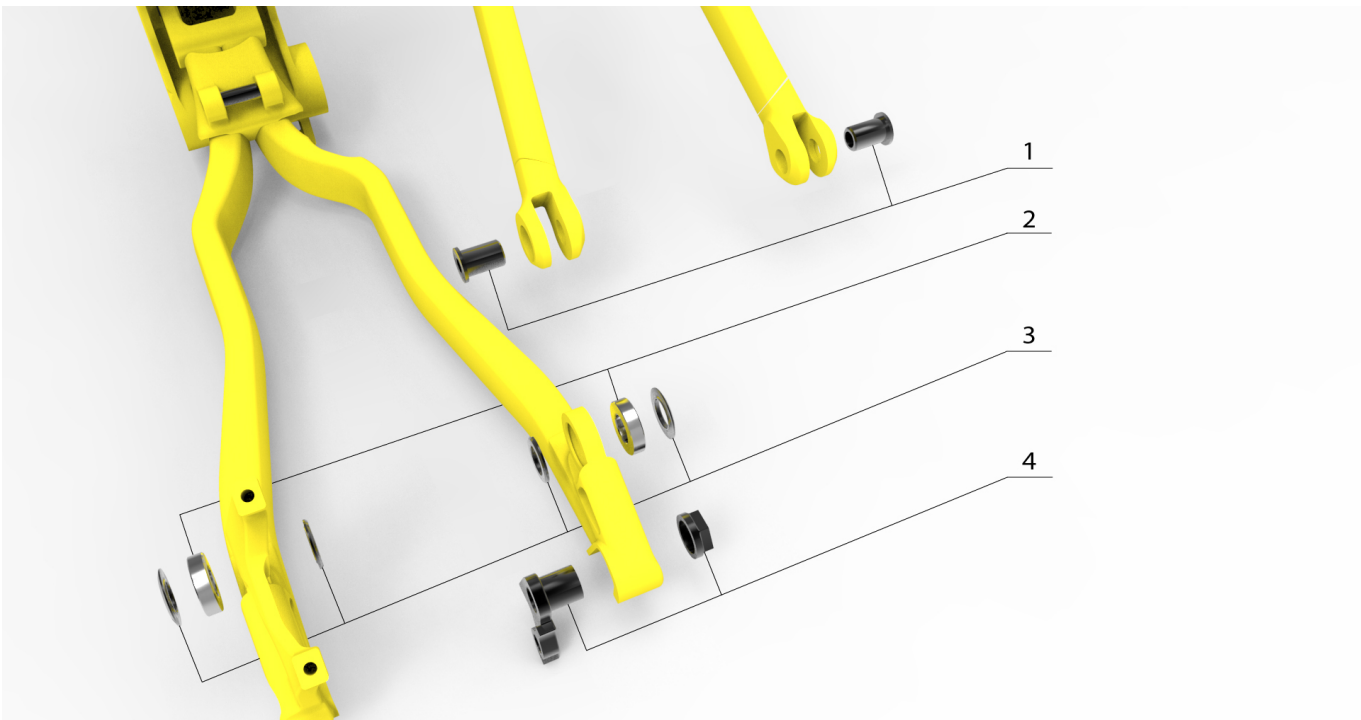


Index	Ref	Nom		Photo
1	W14AXLESSCH	AXE CONTACT SYSTEM META V3 ET SUPREME V3	10-15 N.m	
2	W21EBFURIOUS	ROULEMENTS ENDURO BEARINGS META V3, SUPREME DH V3, V4, FRS, CLASH	2 x 6804 / 6 x 6902	
3	W12WASHCHST	KIT RONDELLES CONTACT SYSTEM META V3 ET SUPREME V3		
4	W12RHRMETA	PATTE DE DERAILLEUR META V3 / SUPREME JR & 24	15 N.m	

Main Pivot

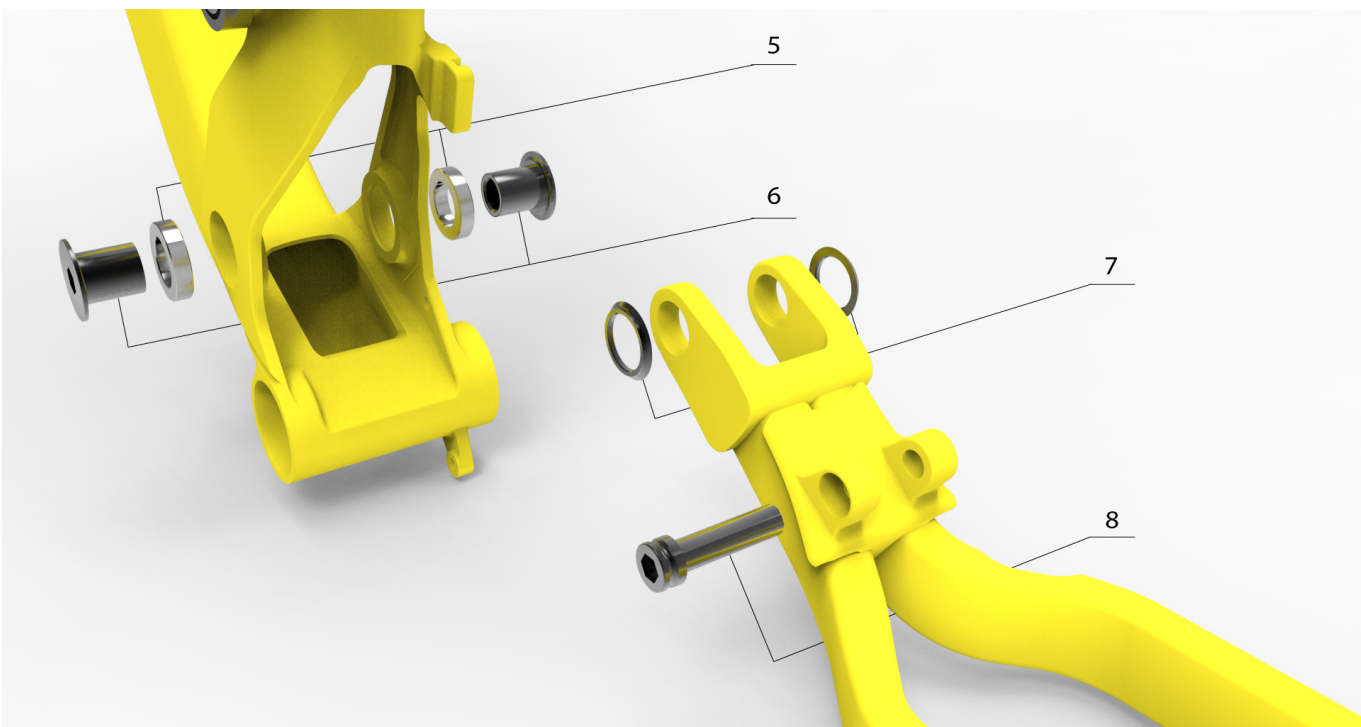

Index	Ref	Nom		Photo
5	W21EBFURIOUS	ROULEMENTS ENDURO BEARINGS META V3, SUPREME DH V3, V4, FRS, CLASH	2 x 6804 / 6 x 6902	
6	W14AXLEMNPVTPB	AXE DE PIVOT PRINCIPAL POUR BASES META PIGGY BACK	25 N.m	
7	W12WASHKITMP	RONDELLES PIVOT PRINCIPAL META V3 ET SUPREME V3		
8	W12AXLESHYO	AXE AMORTISSEUR / TRIANGLE ARRIERE SUPREME DH V3 / META V3	12 N.m	

Contact System

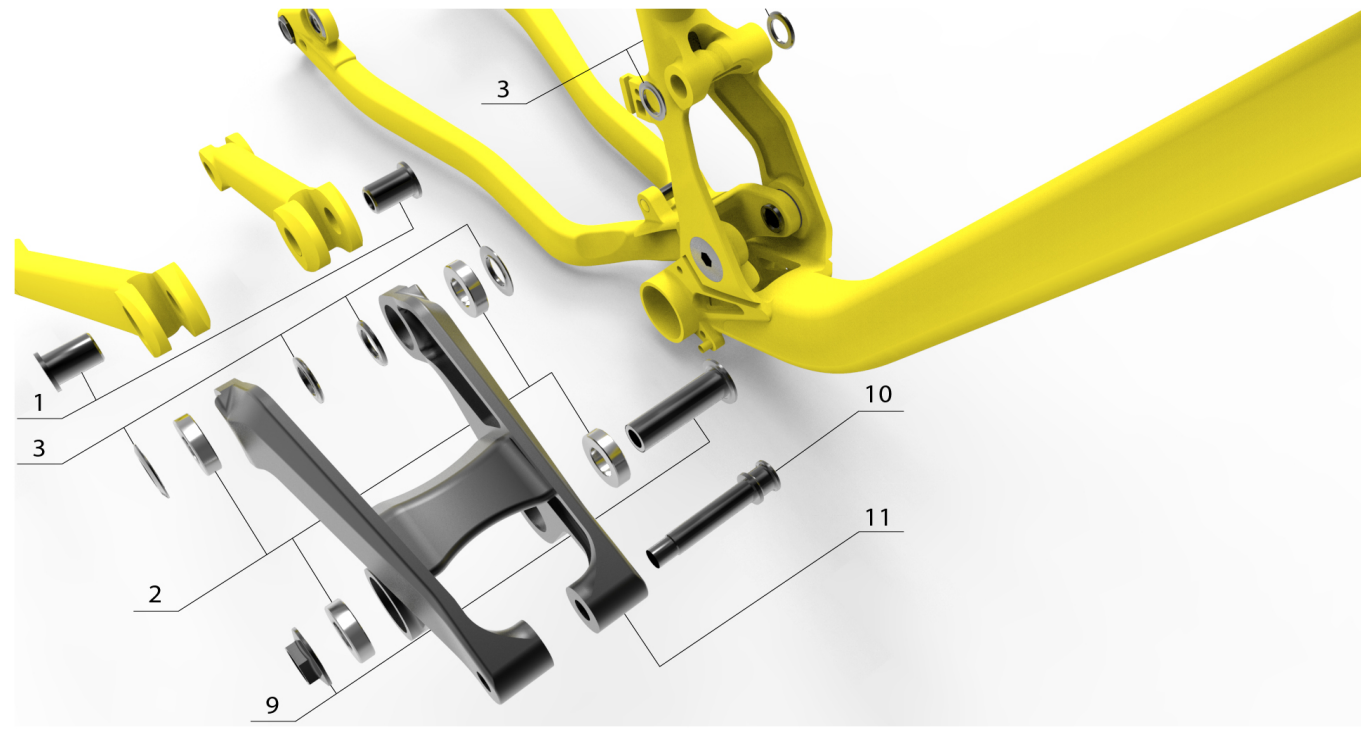

Index	Ref	Nom		Photo
1	W14AXLESSCH	AXE CONTACT SYSTEM META V3 ET SUPREME V3	10-15 N.m	
10	W12AXLESHLI	AXE AMORTISSEUR / BASCULEUR SUPREME DH V3 / META V3	12 N.m	
11	W13ROCKERSX	KIT BASCULEUR POUR META SX		
2	W21EBFURIOUS	ROULEMENTS ENDURO BEARINGS META V3, SUPREME DH V3, V4, FRS, CLASH	2 x 6804 / 6 x 6902	
3	W12WASHCHST	KIT RONDELLES CONTACT SYSTEM META V3 ET SUPREME V3		
9	W12AXLELINK	AXE BASCULEUR / TRIANGLE AVANT + VIS POUR SUPREME DH V3 et META V3	10-15 N.m	