

2019

COMMENCAL CLASH JUNIOR 2019



SPECS

FRAME	2019 CLASH JR, 650b, 160 mm travel
SHOCK	ROCKSHOX DELUXE SELECT + RT, 210 x 55, rebound, 2 positions
FORK	ROCKSHOX 35 GOLDEN, 100 mm travel, rebound, compression
HEADSET	ACROS PANT 2544 / 2556, sealed bearings, IPS Technology
STEM	RIDE ALPHA FREERIDE, 40 mm, 31.8 mm, 0° angle
BAR	RIDE ALPHA, alloy 7050, gauge handle, 15 mm rise, 760 mm, 31.8 mm
GRIPS	RIDE ALPHA, DH Grip, ultra soft compound, single clamp
BRAKES	SRAM GUIDE 1200 mm / 160 mm
SHIFTERS	SRAM NX EAGLE, 1 x 12 speed
FRONT / REAR MECH	SRAM NX EAGLE, 1 x 12 speed
BOTTOM BRACKET	SRAM DUB, Press Fit B2 30
CRANKSET	SRAM DESCENDANT AX EAGLE EK, 34.1, 165 mm
CHAIN	SRAM NX EAGLE, 1 x 12 speed
CASSETTE	SRAM NX EAGLE, 10 - 50, 12 speed
RIMS	WTB ST 20, 32 holes, tubular ready, 29 mm inner width
HUBS	FORMULA, 32 holes, sealed bearings
SPOKES / NIPPLES	SAPPH LEADER SPARK, SHIMANO SHIM, 2.0 mm
TYRES	VEE TIRE CO LOW STAMP, 27.5 x 2.35, tubeless compatible, SHIMANO, tubular ready
SEATPOST	KCS Raptor, 31.6 mm, 100 mm travel
SADDLE	RIDE ALPHA Kids
WEIGHT	15.5 kg / 34.1 lb
PEDALS INCLUDED	Yes
ACCESSORIES	Down tube protection, chainstay protection, seatstay protector

TECH


BICYCLE TYPE	Enduro/DH M3, 29"
FRAME MATERIAL	Chassis 3R
FRAME WEIGHT	3,200 g
REAR WHEEL TRAVEL	160 mm
SHOCK LENGTH / STROKE	210 x 55 mm
PIGGY BACK SHOCK COMPATIBLE	Yes
SHOCK BEARINGS	20 x 40 mm axials, 20 x 10 mm air
RECOMMENDED MAX FORK HEIGHT	652 mm
HEADSET DIMENSION	105 mm
HEADSET TYPE	2544 / 2556
MAXIMUM TYRE DIMENSION (ETRTD)	27.5 x 2.6"
DISC BRAKE STANDARD	PM600
REAR ROTOR MAX SIZE	200 mm
SEATPOST / SEAT CLAMP DIAMETER	31.6 mm
BOTTOM BRACKET TYPE	PF30
MAX. CHAINRING SIZE	36 T
BB01	BB0105
FRONT DERAILLEUR TYPE	1
REAR HUB COMPATIBILITY	12 x 148 mm

Contact System




Index	Ref	Nom		Photo
1	W19CLHAXLERKSS	AXES BASCULEUR / HAUBANS CLASH	12-15 N.m	
2	W19CLHKWASHERCS	RONDELLES CONTACT SYTEM CLASH 24 ET JR		
3	W19EB6902	ROULEMENT ENDOURO BEARINGS 6902 LLU MAX	15 x 28 x 7	
4	W19CLHKAXLERKSH	AXE AMORTISSEUR / BASCULEUR CLASH 24 ET JR	12 N.m	
5	W19CLHKROCKER	BASCULEUR CLASH 24 ET JR		
6	W17FUAXLERCK	KIT AXE BASCULEUR / TRIANGLE AVANT FURIOUS V2	10-12 N.m	
BEARING KIT	W19EBCLASH	ROULEMENTS ENDOURO BEARINGS CLASH	2 x 6804 / 2 x 6903 / 4 x 6902	

Main Pivot

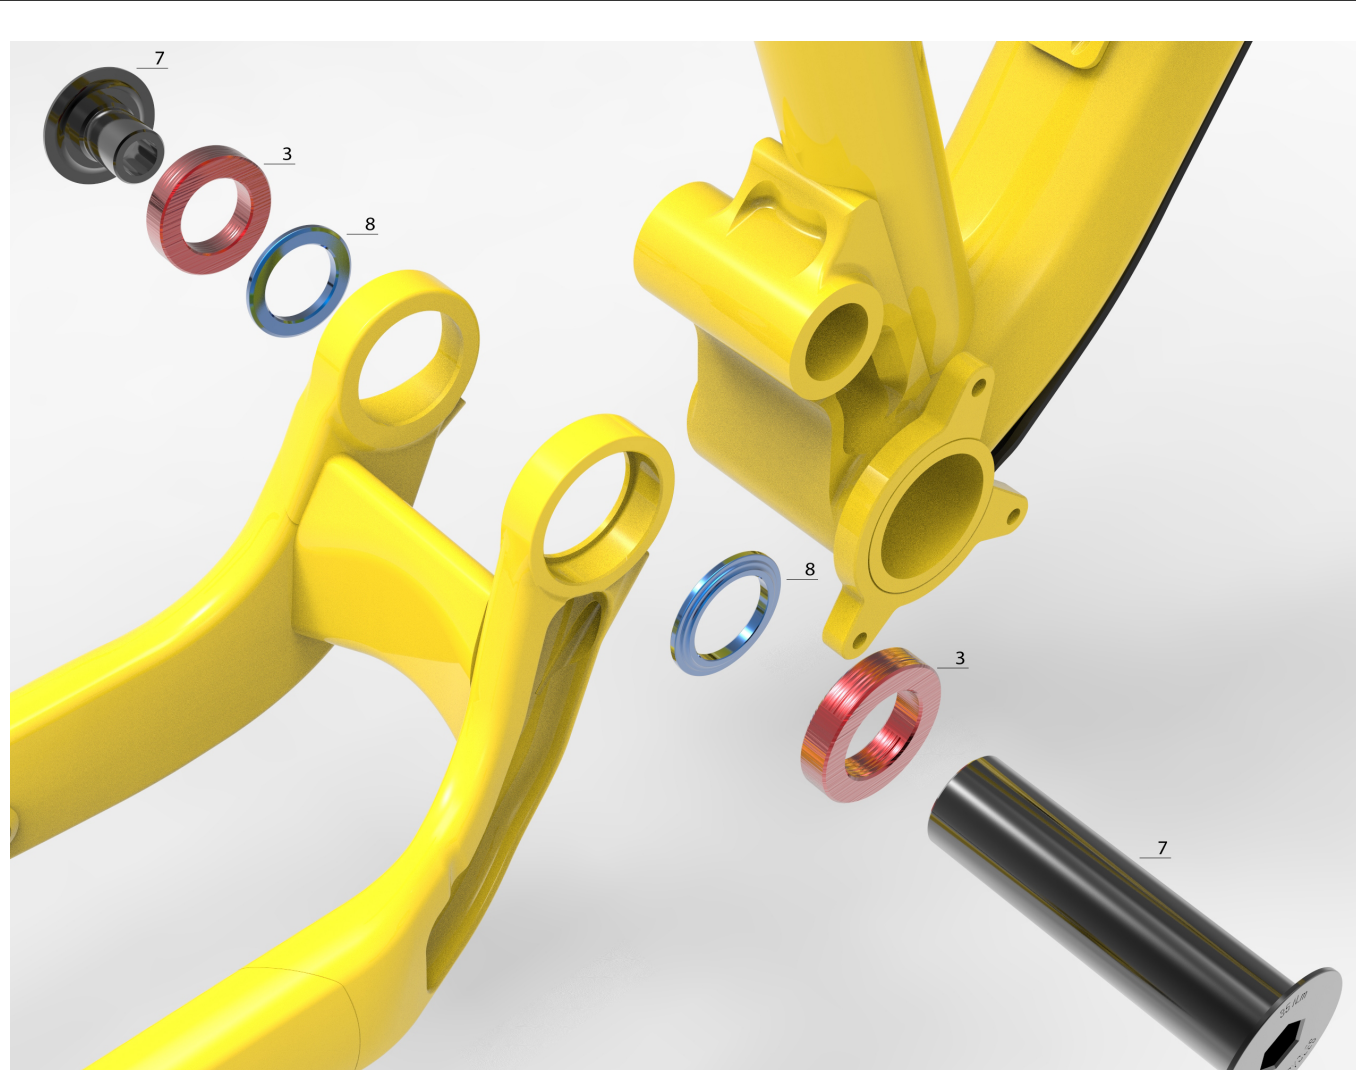

Index	Ref	Nom		Photo
3	W19EB6804	ROULEMENT ENDOURO BEARINGS 6804 LLU MAX	20 x 32 x 7	
7	W19M29AXLEMP	AXE PIVOT PRINCIPAL META 29 ET CLASH	30-35 N.m	
8	W19M29WASHERMP	RONDELLES PIVOT PRINCIPAL META 29 ET CLASH		
BEARING KIT	W19EBCLASH	ROULEMENTS ENDOURO BEARINGS CLASH	2 x 6804 / 2 x 6903 / 4 x 6902	

Chainstays / Seatstays

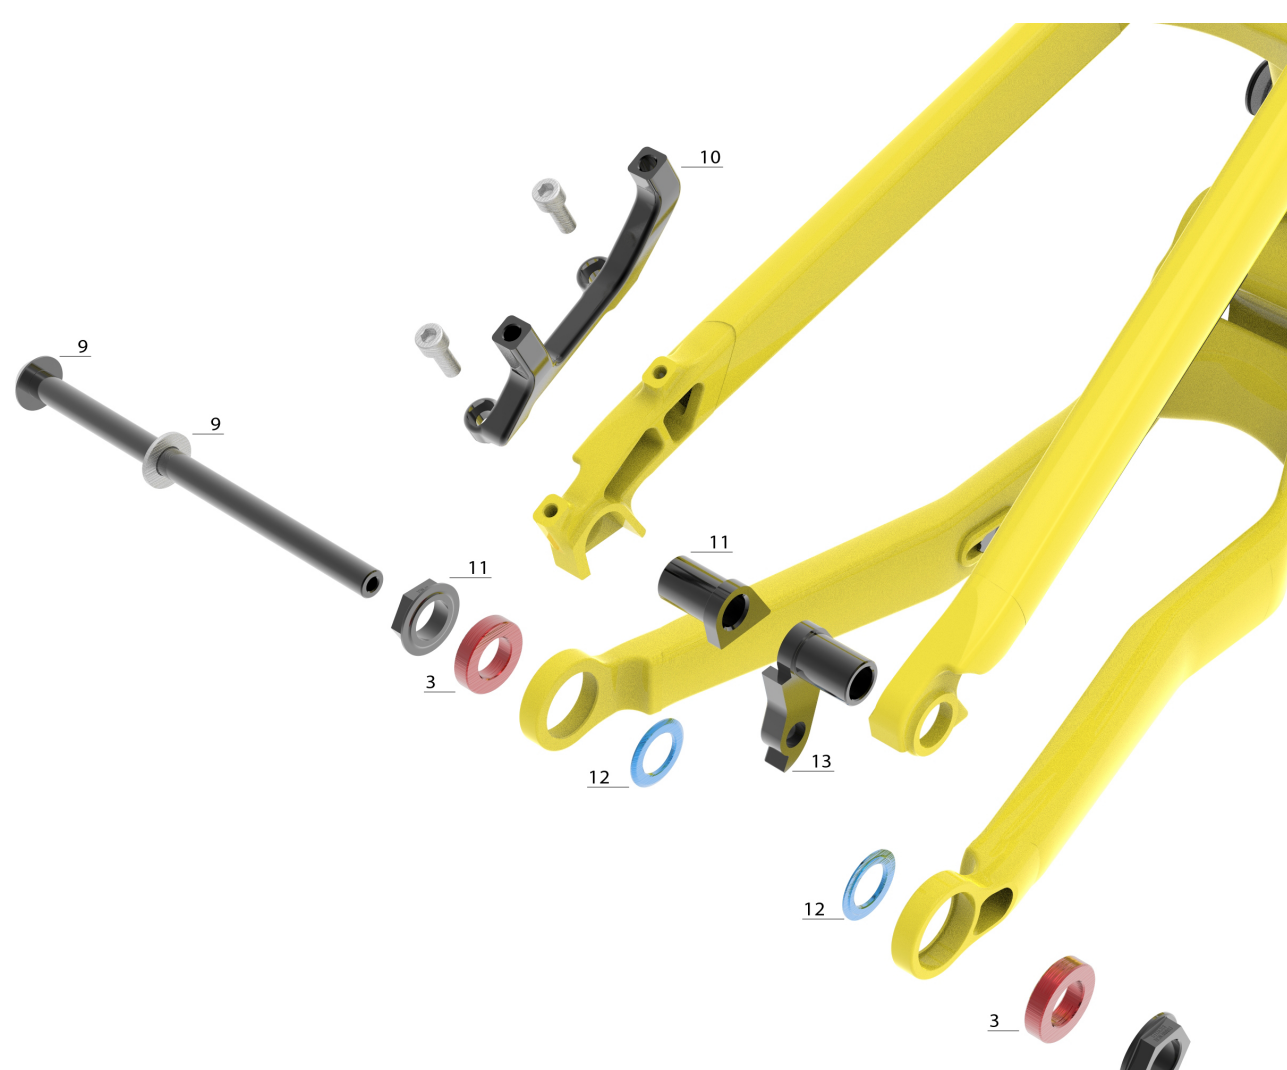

Index	Ref	Nom		Photo
10	W19CLHBRAKEH180	PATTE DE FREIN ARRIERE 180 MM CLASH ET CLASH HD		
11	W19CLHRLHL	PATTE GAUCHE CLASH	22 N.m	
12	W19CLHKWASHERCSS	RONDELLES BASES / HAUBANS CLASH 20, 24 ET JR		
13	W19CLHRRHROS	PATTE DE DERAILLEUR CLASH OFFSET	22 N.m	
3	W19EB6903	ROULEMENT ENDOURO BEARINGS 6903 LLU MAX	17 x 30 x 7	
9	W19CLHAXLEWHEEL	AXE DE ROUE ARRIERE CLASH	12 N.m	
BEARING KIT	W19EBCLASH	ROULEMENTS ENDOURO BEARINGS CLASH	2 x 6804 / 2 x 6903 / 4 x 6902	

Downtube



Index	Ref	Nom		Photo
14	W16DHV4SHOCKAXLE	AXE AMORTISSEUR / TRIANGLE AVANT SUPREME DH / FURIOUS CLASH	9 N.m	
15	W12H0SESEAL	JOINT DE PASSAGE DURITE INTERNE		
16	W18SEAL1H	PROTECTION DE PASSAGE INTERNE CABLERIE - 1 TROU		
18	W18SEAL2H	PROTECTION DE PASSAGE INTERNE CABLERIE - 2 TROUS		
18	W18SEALNOH	PROTECTION DE PASSAGE INTERNE CABLERIE - 0 TROU		

Downtube




Index	Ref	Nom		Photo
15	W12H0SESEAL	JOINT DE PASSAGE DURITE INTERNE		
16	W18SEAL1H	PROTECTION DE PASSAGE INTERNE CABLERIE - 1 TROU		
18	W18SEAL2H	PROTECTION DE PASSAGE INTERNE CABLERIE - 2 TROUS		
18	W18SEALNOH	PROTECTION DE PASSAGE INTERNE CABLERIE - 0 TROU		

Hose Guide




Index	Ref	Nom		Photo
17	W19CLHCABLEGUIDET	GUIDE CABLE SUPERIEUR CLASH	3 N.m	

Hose Guide

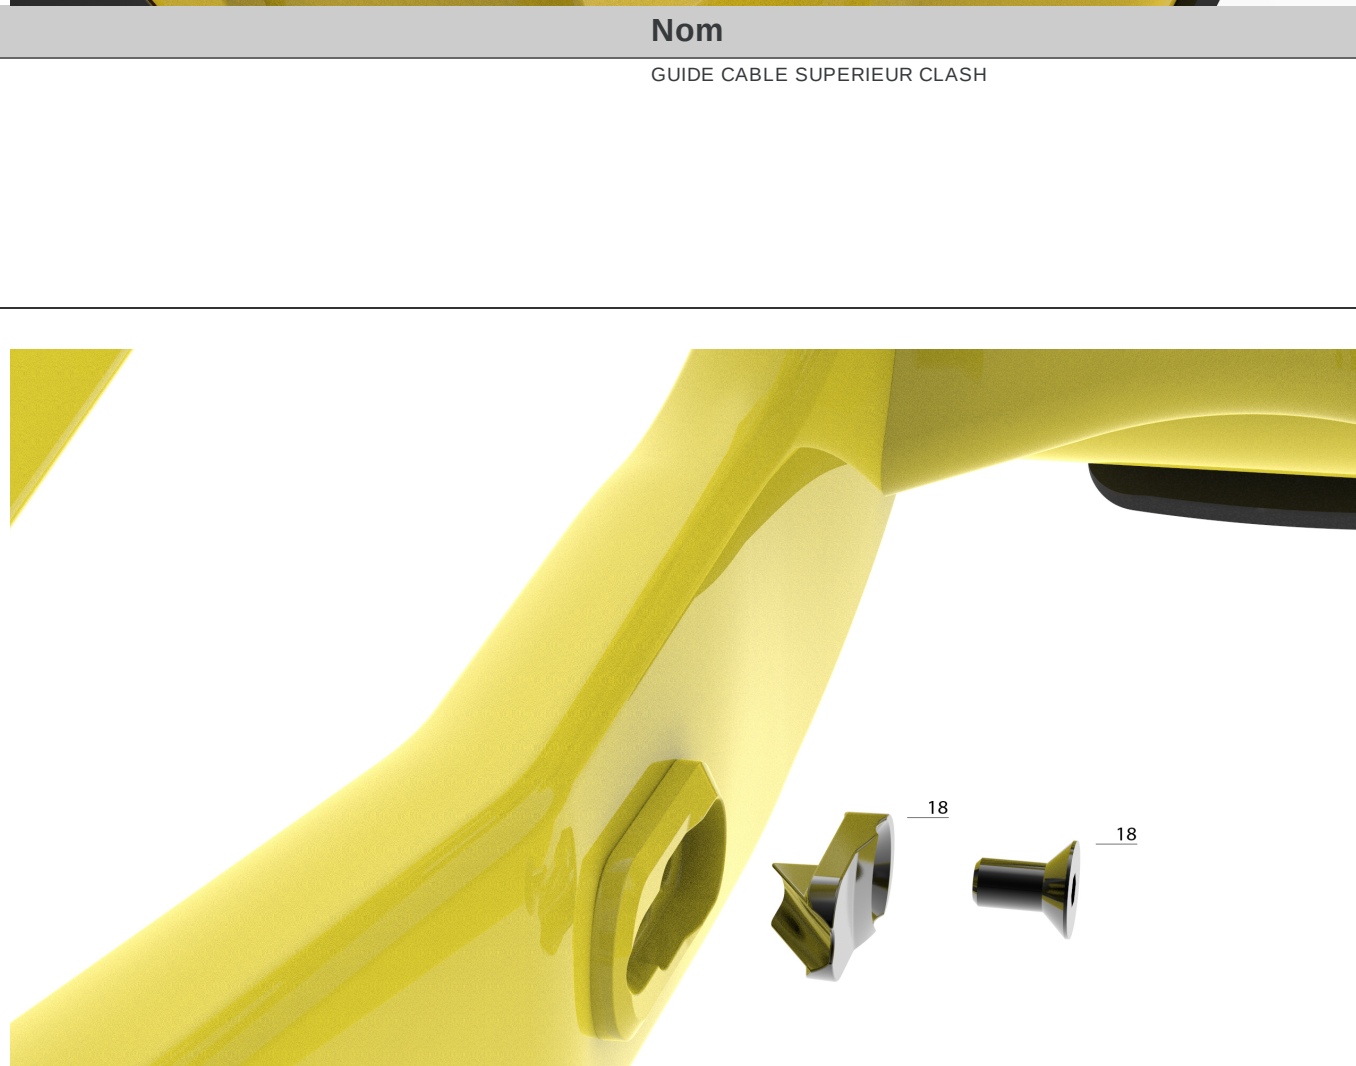

Index	Ref	Nom		Photo
18	W19CLHCABLEGUIDEB	GUIDE CABLE INFRIEUR CLASH, META, META POWER, FRL, TEAM P.O., DHV5	3 N.m	

Protectors

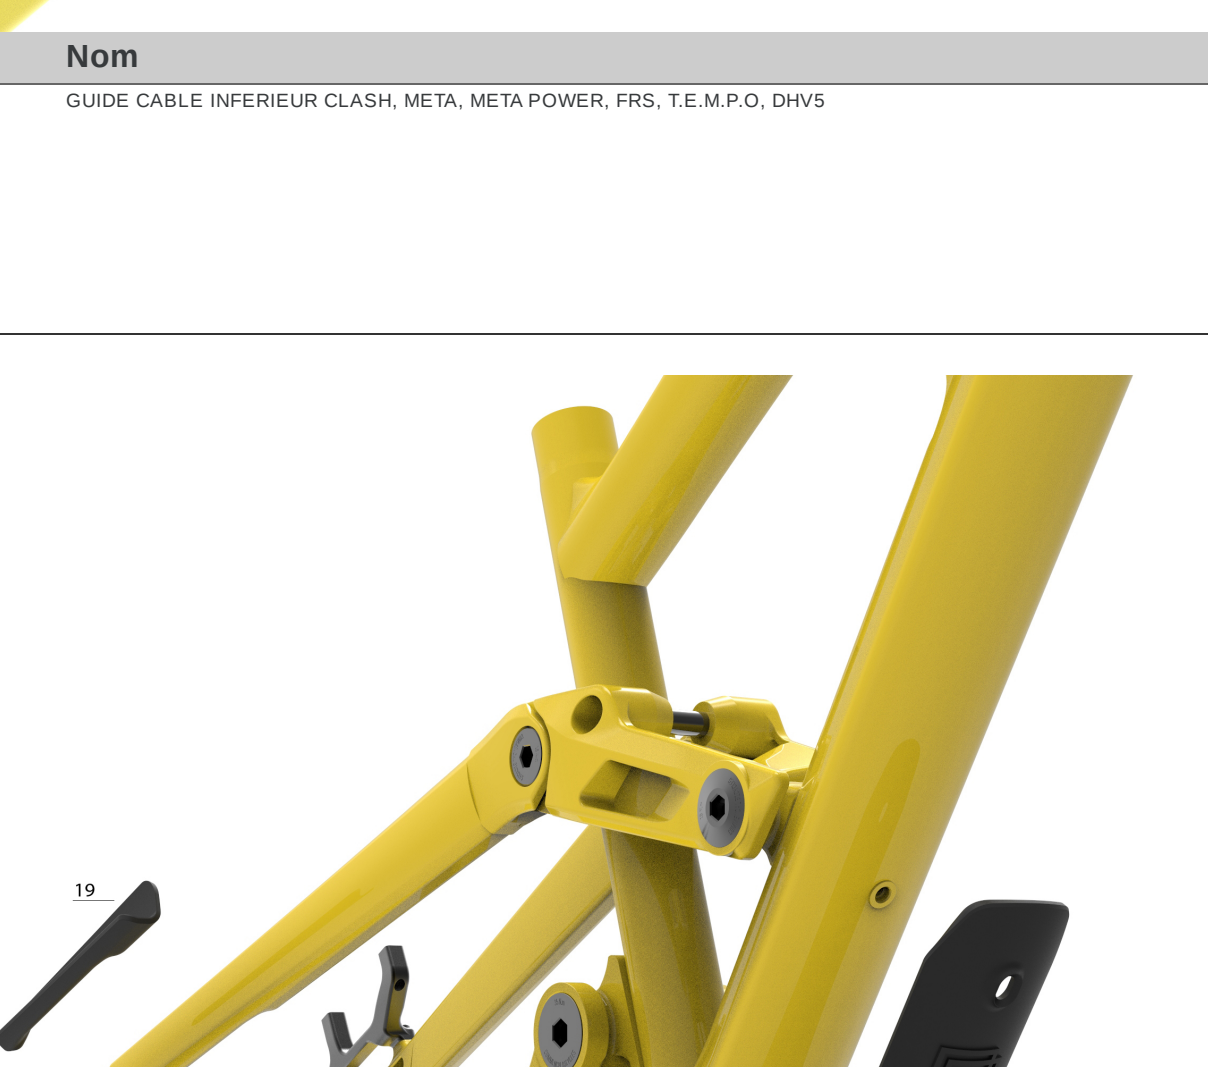

Index	Ref	Nom		Photo
19	W19CLHKPROTECCS	PROTECTION DE HAUBAN CLASH 20 / 24 / JR		
20	W19CLH24PROTECCS	PROTECTION DE BASE CLASH 24		
21	W19CLHKPROTECDT	PROTECTION DE DOWNTUBE CLASH 20 / 24	3 N.m	