

2019

COMMENCAL CLASH SIGNATURE 2019



SPECS

FRAME	2019 CLASH, 6500, 165 mm travel
SHOCK	FOX DHX2 FACTORY FIT 650P 2, 160mm, 15 mm axle, high / low speed compression, high / low speed rebound, 400 lbs on S, 450 lbs on M, 500 lbs on L, 550 lbs on XL
FORK	FOX 36 FACTORY FIT 650P 2, 160mm, 15 mm axle, high / low speed compression, high / low speed rebound, boost, Bottomless Tokens: 0
HEADSET	ACROS Alloy Z54/Z556, sealed bearings
STEM	RIDE ALPHA FREERIDE, 40 mm, 31.8 mm, 0° angle
BAR	RIDE ALPHA, Alloy 7075, 760 mm, 31.8 mm, 30 mm rise
GRIPS	RIDE ALPHA, DH Grips, ultra soft compound, single clamp
BRAKES	SHIMANO XT, 4 pistons, 200 mm / 200 mm
SHIFTERS	SRAM GX EAGLE, 1 x 12 sp
CHAIN GUIDE	
FRONT / REAR MECH	- / SRAM GX EAGLE, 1 x 12 sp
BOTTOM BRACKET	SRAM DUB, Press Fit BB 92
CRANKSET	SRAM DESCENDANT EAGLE 7K, X-Sync, 34T, boost 170 mm on SM, 175 mm on LNL
CHAIN	SRAM NX EAGLE, 12 sp
CASSETTE	SRAM XG-1275, 10-50T, 12 speed
WHEELSET	E13 TTR wheelset, 28 holes, tubless ready, 30 mm inner width
TYRES	SCHWALBE MAGIC MARY, 27.5 x 2.35, TLE, Addix soft, front
	SCHWALBE NEW HANS DAMPF, 27.5 x 2.35, TLE, Addix soft, rear
SEATPOST	KNOXSHOCK, LEV INTESIOA, 31.6 mm, 300tpw alloy lever, 100 mm on S, 125 mm on M, 150 mm on L, 175 mm on XL
SADDLE	WTB SLB RACE, 142 mm width, crmo rails
WEIGHT	15 kg
PEDALS INCLUDED	No
ACCESSORIES	Chainstay protector, seatstay protector, downtube protector

TECH

BICYCLE TYPE	Full suspension Enduro
FRAME MATERIAL	NEC + ULTRA SL (aluminium 6006 triple butted)
FRAME WEIGHT	3.3 kg
REAR WHEEL TRAVEL	165 mm
SHOCK LENGTH / STROKE	230 x 65 mm
PIGGY BACK SHOCK COMPATIBLE	Yes
SHOCK BUSHINGS	30 x 10 mm / 20 x 8 mm
RECOMMENDED MAX FORK HEIGHT	571 mm / 581 mm
HEADSET DIMENSION	Tapered
HEADSET TYPE	Z544 / Z556
MAXIMUM TYRE DIMENSION (ETRTO)	70 mm
DISC BRAKE STANDARD	Postmount 200 mm
REAR ROTOR MAX SIZE	203 mm
SEATPOST / SEAT CLAMP DIAMETER	31.6 mm / 34.9 mm
BOTTOM BRACKET TYPE	Press Fit BB92
MAX. CHAINRING SIZE	34T
ISO	ISO55
FRONT DERAILLEUR TYPE	◆
REAR HUB COMPATIBILITY	Boost, Maxle Standard

Downtube




Index	Ref	Nom	Photo
5	W19CLHAXLESHRK	AXE AMORTISSEUR / BASCULEUR CLASH	12 N.m
6	W16DHV4SHOCKAXLE	AXE AMORTISSEUR / TRIANGLE AVANT SUPREME DH / PURIOUS/CLASH	9 N.m

Hose Guide



Index	Ref	Nom	Photo
15	W19CLHCABLEGUIDET	GUIDE CABLE SUPERIEUR CLASH	3 N.m

Main Pivot

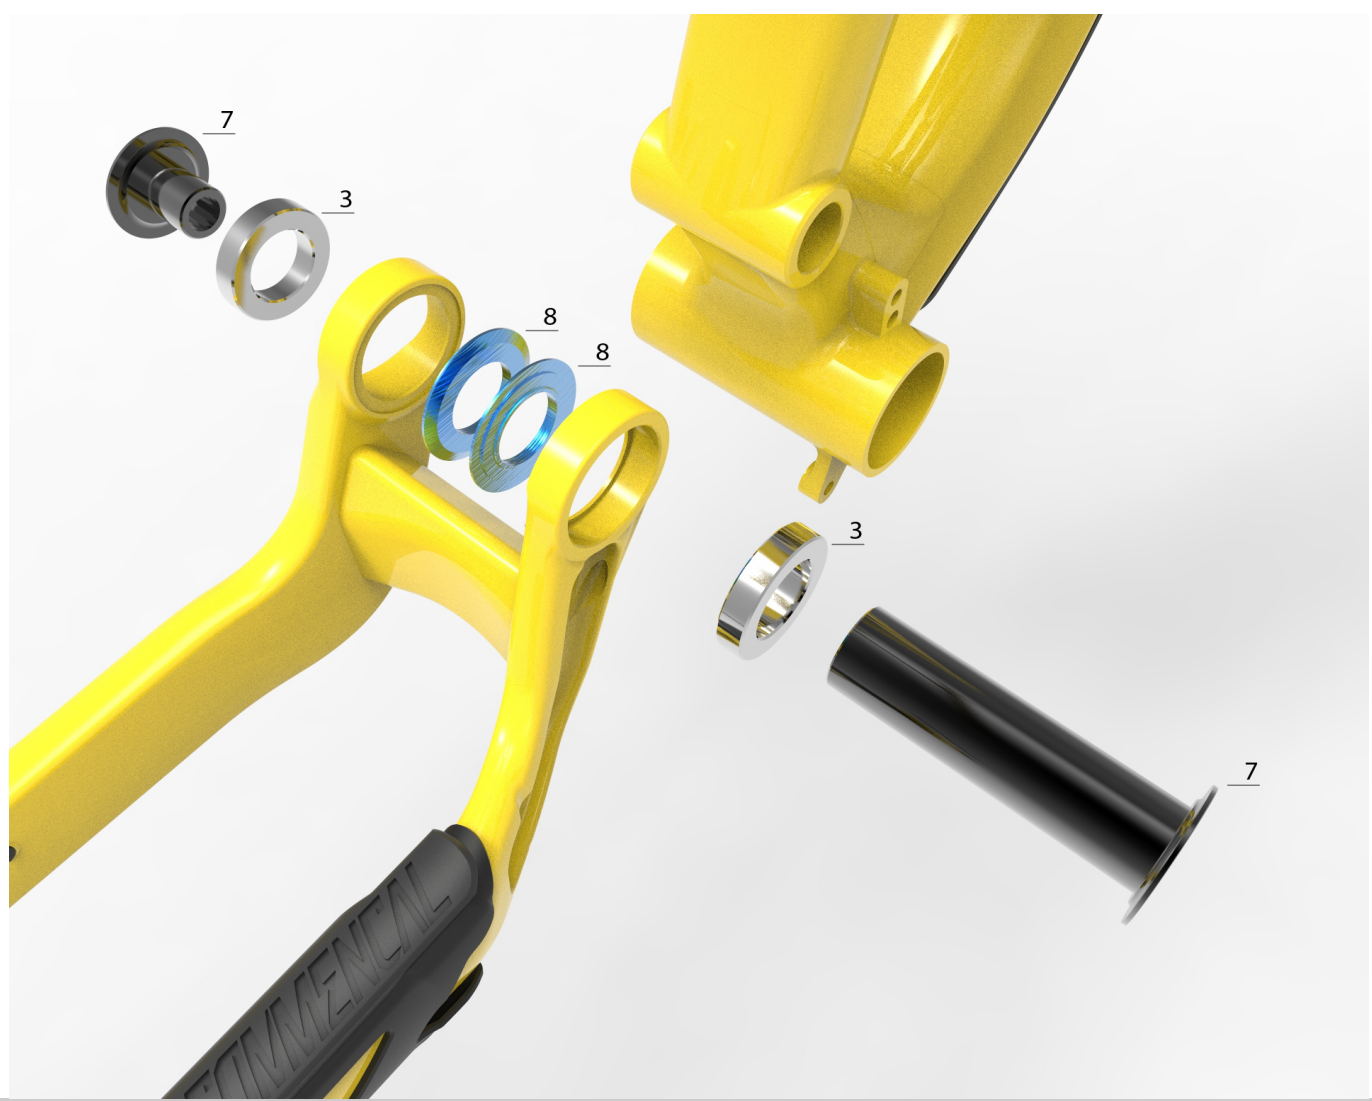

Index	Ref	Nom	Photo
3	W19EB6804	ROULEMENT ENDOURO BEARINGS 6804 LLU MAX	20 x 32 x 7
7	W19M29AXLEMP	AXE PIVOT PRINCIPAL META 29 ET CLASH	30-35 N.m
8	W19M29WASHERMP	RONDELLES PIVOT PRINCIPAL META 29 ET CLASH	
BEARING KIT	W22EBCLASHV1	ROULEMENTS ENDOURO BEARINGS CLASH V1	2 x 6804 / 4 x 6902 / 2 x 6903

Chainstays / Seatstays



Index	Ref	Nom	Photo
10	W19CLHBRAKEH200	PATTE DE FREIN ARRIERE 200 MM CLASH	
11	W19CLHRLH	PATTE GAUCHE CLASH	22 N.m
12	W19CLHWASHERCSSS	RONDELLES BASES / HAUBANS CLASH	
13	W19CLHRHROS	PATTE DE DERAILLEUR CLASH OFFSET	22 N.m
14	W19CLHCABLEGUIDEB	GUIDE CABLE INFERIEUR CLASH, META, META POWER, FRS, T.E.M.P.O., DHV5	3 N.m
3	W19EB6903	ROULEMENT ENDOURO BEARINGS 6903 LLU MAX	17 x 30 x 7
9	W19CLHAXLEWHEEL	AXE DE ROUE ARRIERE CLASH	12 N.m
BEARING KIT	W22EBCLASHV1	ROULEMENTS ENDOURO BEARINGS CLASH V1	2 x 6804 / 4 x 6902 / 2 x 6903

Protectors



Index	Ref	Nom	Photo
16	A16SSTPROTECMETA4	PROTEGE HAUBAN META, CLASH ET META POWER	
17	W19CLHPROTECCS	PROTECTION DE BASE CLASH, META & FRS	
18	W19M29PROTECDT	PROTECTION DE DOWN TUBE META 29 / CLASH	3 N.m
19	W18SEAL1H	PROTECTION DE PASSAGE INTERNE CABLERIE - 1 TROU	
19	W18SEAL2H	PROTECTION DE PASSAGE INTERNE CABLERIE - 2 TROUS	
19	W18SEALNOH	PROTECTION DE PASSAGE INTERNE CABLERIE - 0 TROU	

Rocker



Index	Ref	Nom	Photo
1	W19CLHAXLERKSS	AXES BASCULEUR / HAUBANS CLASH	12-15 N.m
2	W19CLHWASHERCS	RONDELLES CONTACT SYTEM CLASH	
20	W19CLHROCKER	BASCULEUR CLASH	
3	W19EB6902	ROULEMENT ENDOURO BEARINGS 6902 LLU MAX	15 x 28 x 7
4	W19CLHAXLERKOT	AXE BASCULEUR / TUBE DIAGONAL CLASH	12-15 N.m
BEARING KIT	W22EBCLASHV1	ROULEMENTS ENDOURO BEARINGS CLASH V1	2 x 6804 / 4 x 6902 / 2 x 6903