


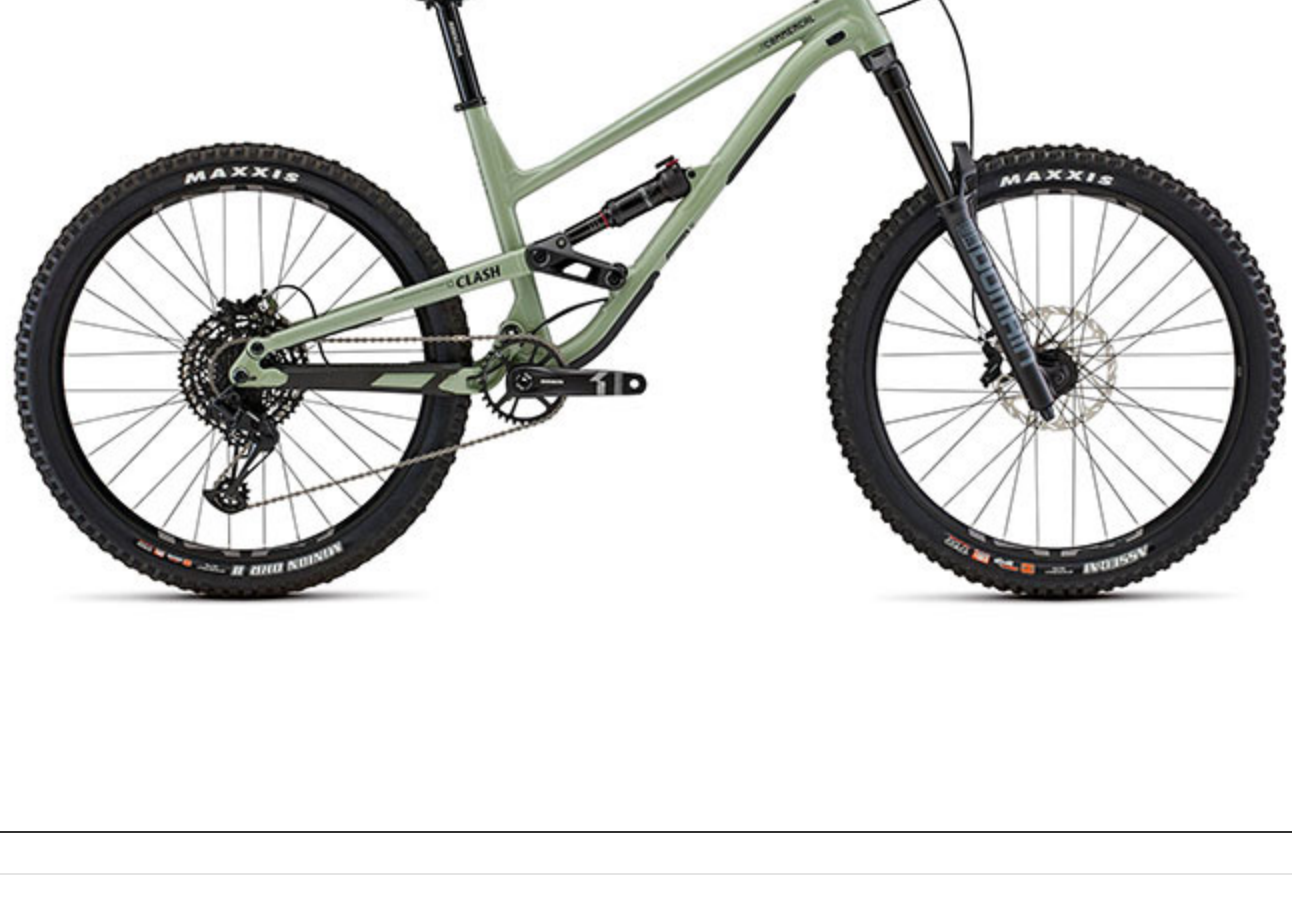


SPECS

CADRE 2022 CLASH, 170 mm travel 27.5", Alloy 6066, triple butted tubes, T4, T6. Enduro bearings
AMORTISSEUR ROCKSHOX Deluxe Select + 230 x 65 mm, rebound, threshold adjustment, 3 Tokens
FOURCHE ROCKSHOX Domain R, 180 mm travel 27.5", DebonAir, external rebound, Boost (15 x 110 mm), 44 mm offset, 0 Token
JEU DE DIRECTION ACROS Z544/Z556 Alloy cups, sealed bearings
POTENCE RIDE ALPHA Freeride 40 40 mm extension, 31.8 mm
CINTRE RIDE ALPHA R20 760 on S - RIDE ALPHA R27 780 on M / L - RIDE ALPHA R27 800 on XL 31.8 mm, 760 mm width, 20 mm rise, Alloy 6061 on S - 31.8 mm, 780 mm width, 27 mm rise, Alloy 6061 on M / L - 31.8 mm, 800 mm width, 27 mm rise, Alloy 6061 on XL
GRIPS RIDE ALPHA DH Ultra-soft compound, single clamp, black
FREINS SRAM Guide T, 4 pistons, MatchMaker compatible Rotor: SRAM G2 CleanSweep 200 mm, 6-bolt
SHIFTERS SRAM SX Eagle 12s
GUIDE CHAÎNE -
DERAILLEUR SRAM SX Eagle 12s
BOITIER DE PEDALIER SRAM DUB Pressfit
PEDALIER SRAM X1 1000 Eagle, 170 mm crank arms, DUB, Boost Chaining: SRAM X1 1000 Eagle, 34t, Narrow-Wide
CHAÎNE SRAM NX Eagle 12s
CASSETTE SRAM PG-1210 12s, 11-50t
JANTES E13 LG1 DH Base 27.5", 32h, 30 mm inner width
MOYEUR Rear: FORMULA DC-348A - Front: FORMULA DC-711 Rear: 32h, sealed bearings - Front: 32h, sealed bearings
RAYONS SAPIM Race J-Bend, 2.0-1.8-2.0mm, double butted, stainless, with Nylol, black
PNEUS Rear: MAXXIS DHR II - Front: MAXXIS Assegai Rear: 27.5" x 2.4", WT, 3C MaxxTerra, EXO+, Tubeless Ready - Front: 27.5" x 2.5", WT, 3C MaxxGrip, EXO+, Tubeless Ready
TIGE DE SELLE RIDE ALPHA 34.9 mm, 400 mm on S/M, 450 mm on L/X
SELLE SDG Bel Air V3 Steel Rails
POIDS 15.5 kg Average weight for S size, without pedals. Weight may differ slightly due to manufacturing tolerances.
PÉDALES No
COULEUR Heritage Green Matte Finish
ACCESSOIRES Down tube protector, chainstay protector, seatstay protector, shuttle pad
• Vidéos

TECH


TYPE DE VELO ENDURO / FREERIDE
CADRE Al 6066T6
POIDS DU CADRE 4 kg
DEBATTEMENT ARRIERE Adjustable via flip chip: 170 mm on Grip position / 155 mm on Dynamic position
ENTRE-AXE / COURSE 230 mm x 65 mm
COMPATIBLE PIGGY BACK Yes
BUSELURES AMORTISSEUR 20 x 8 mm - 30 x 10 mm
HAUTEUR DE FOURCHE RECOMMANDEE / MAX 572 mm / 586 mm
DOUILLE DE DIRECTION Tapered
JEU DE DIRECTION Z544 / Z556
LARGEUR MAXIMALE PNEUS (ETRTO) 65 mm
STANDARD FREIN A DISQUE Postmount 200 mm
DIAMETRE MAX DISQUE DE FREIN AR 223 mm
DIAMETRE TIGE DE SELLE / COLLIER DE SELLE 34.9 mm / 38.5 mm
BOITIER DE PEDALIER Press Fit BB 92
ISCG ISCG05
DERAILLEUR AVANT No
AXE DE ROUE ARRIERE 148 x 12 mm
• Géométrie • Tailles

Contact System

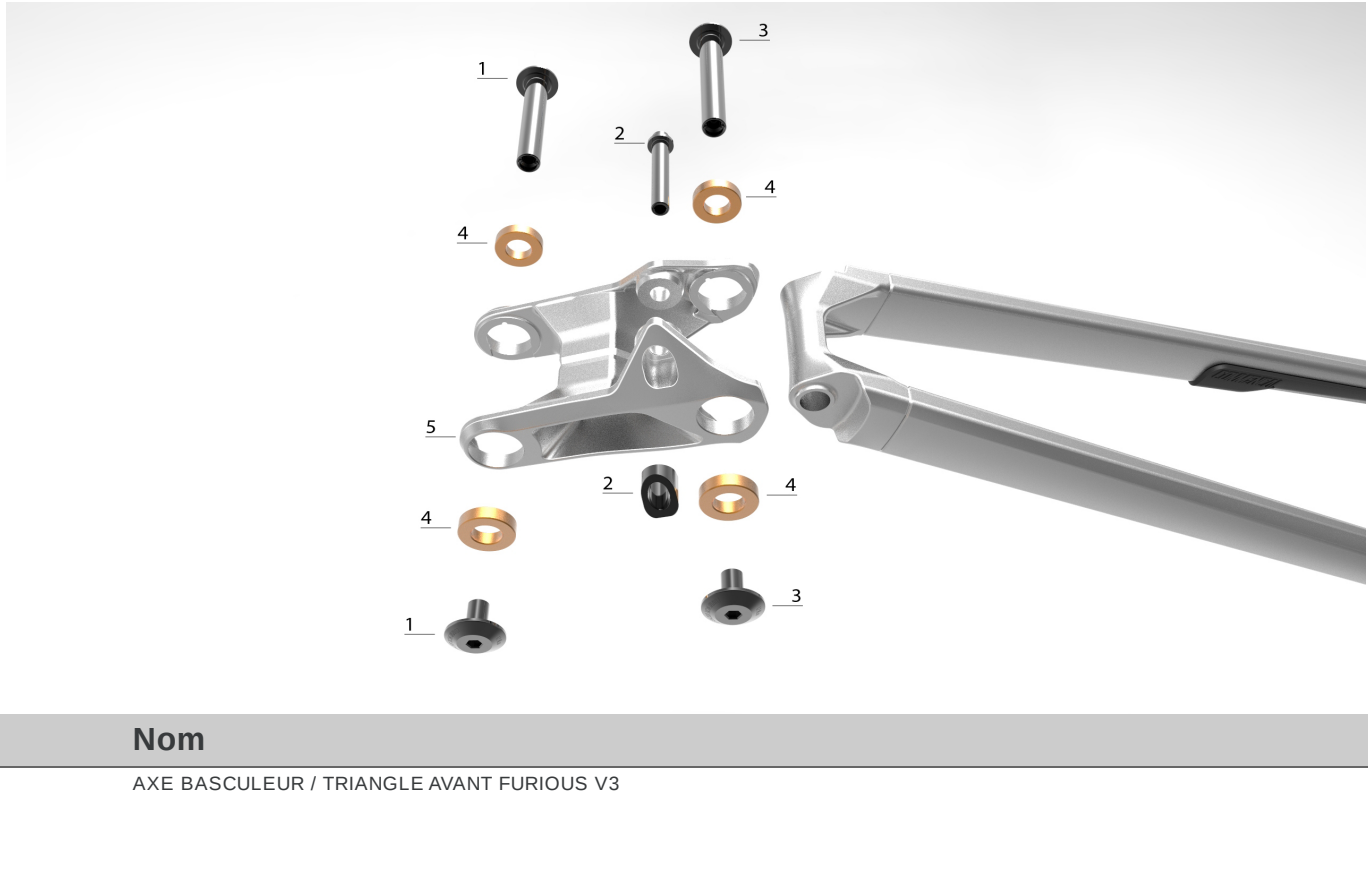


Index	Ref	Nom	Photo
1	W20FUV3AXLERKFT	AXE BASCULEUR / TRIANGLE AVANT FURIOUS V3	
2	W18DH29AXLERKSH	AXE AMORTISSEUR / BASCULEUR SUPREME DH / CLASH	
2	W21CLHSHHNS	PIEDT AXE AMORTISSEUR CLASH V2	
3	W21CLHAXLERKSS	AXE BASCULEUR / HAUBANS CLASH V2	
4	W19EB6902	ROULEMENT ENDURO BEARINGS 6902 LLU MAX	
5	W21CLHRROCKER	BASCULEUR CLASH V2	
BEARING KIT	W21EBFURIOUS	ROULEMENTS ENDURO BEARINGS META V3, SUPREME DH V3, V4, FRS, CLASH	

Main Pivot

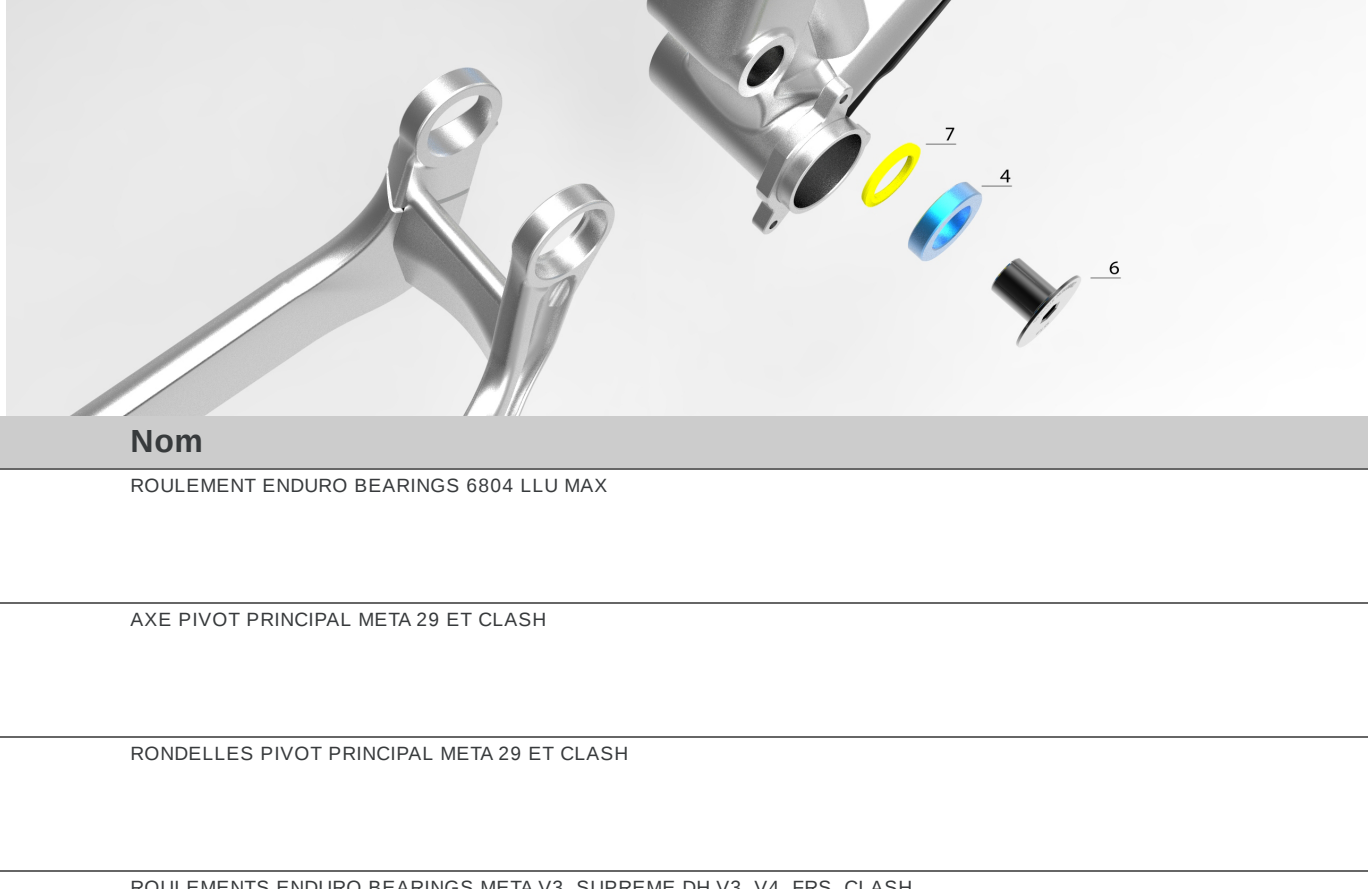


Index	Ref	Nom	Photo
4	W19EB6804	ROULEMENT ENDURO BEARINGS 6804 LLU MAX	
6	W19M29AXLEMP	AXE PIVOT PRINCIPAL META 29 ET CLASH	
7	W19M29WASHERMP	RONDILLES PIVOT PRINCIPAL META 29 ET CLASH	
BEARING KIT	W21EBFURIOUS	ROULEMENTS ENDURO BEARINGS META V3, SUPREME DH V3, V4, FRS, CLASH	

Chainstays / Seatstays

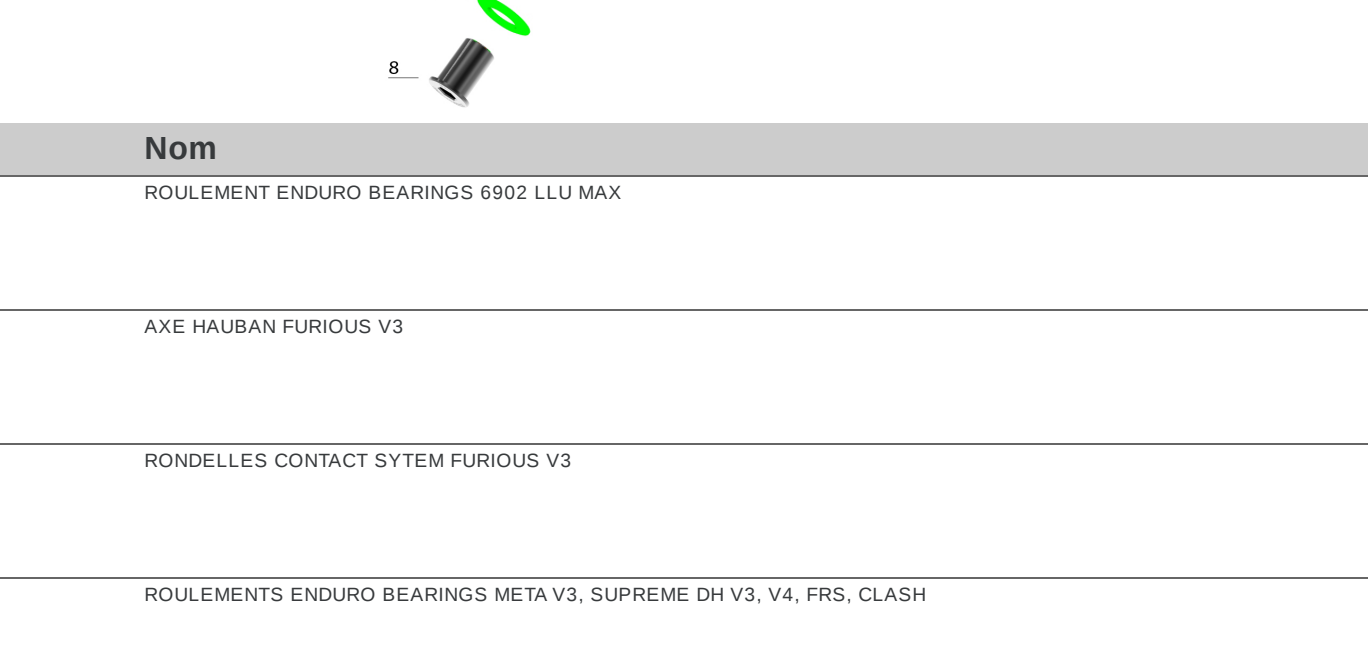

Index	Ref	Nom	Photo
4	W19EB6902	ROULEMENT ENDURO BEARINGS 6902 LLU MAX	
8	W20FUV3AXLECS	AXE HAUBAN FURIOUS V3	
9	W20FUV3WASHERCS	RONDILLES CONTACT SYTEM FURIOUS V3	
BEARING KIT	W21EBFURIOUS	ROULEMENTS ENDURO BEARINGS META V3, SUPREME DH V3, V4, FRS, CLASH	

Dropouts

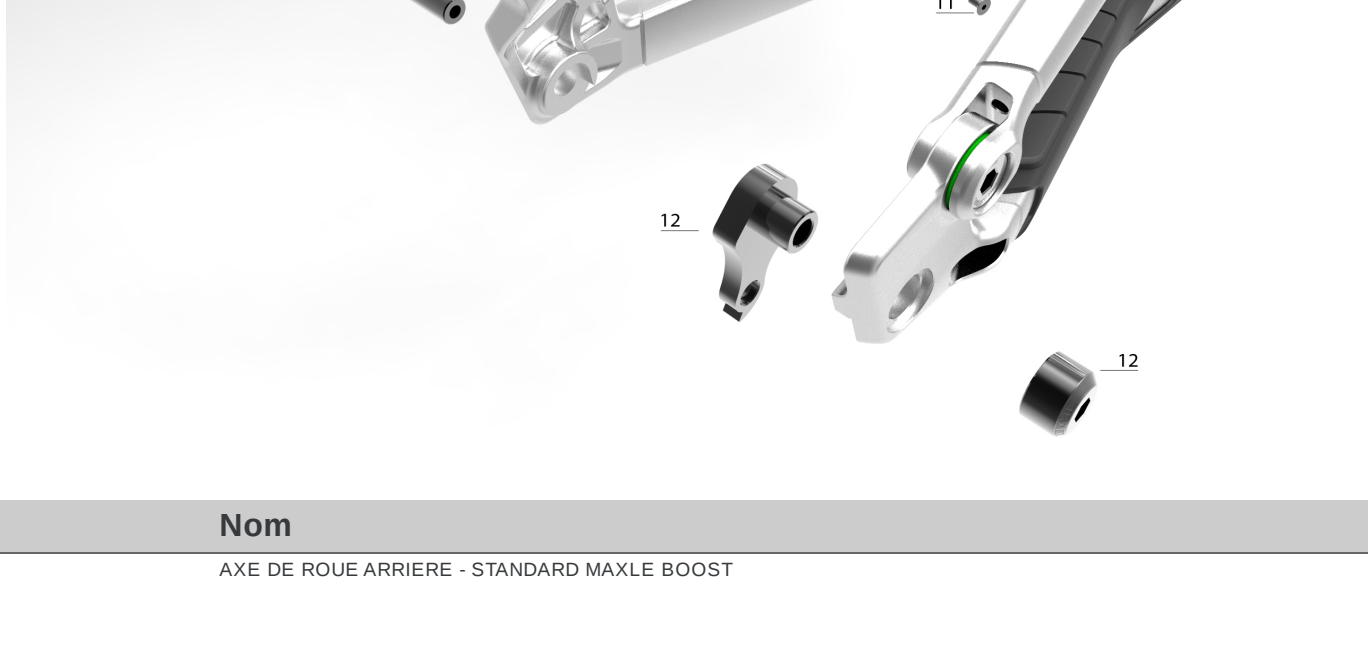


Index	Ref	Nom	Photo
10	W19AXLEWHEELBOOST	AXE DE ROUE ARRIERE - STANDARD MAXLE BOOST	
11	W19CLHCABLEGUIDEB	GUIDE CABLE INFÉRIEUR CLASH, META, META-POWER, FRS, T.E.M.P.O., DHFS	
12	W21CLHRHR	PATTE DE DERAILLEUR CLASH V2	

Downtube




Index	Ref	Nom	Photo
13	W21CLHNSRPFT	FLIP CHIP CLASH V2	
14	W20FUV3CABLEGUIDET	GUIDE CABLE SUPÉRIEUR FRS V3, CLASH V2	

Seals

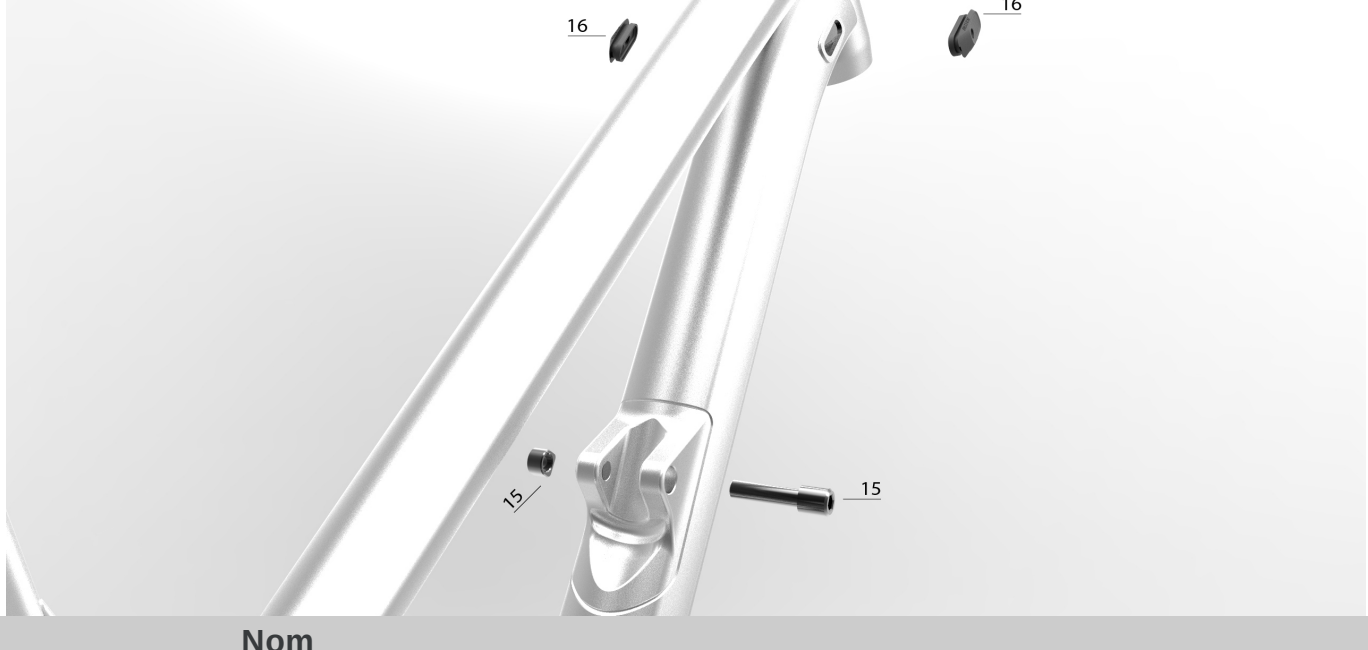


Index	Ref	Nom	Photo
15	W16DHVASHOCKAXLE	AXE AMORTISSEUR / TRIANGLE AVANT SUPREME DH / FURIOUSCLASH	
16	W16SEAL1H	PROTECTION DE PASSAGE INTERNE CABLERIE - 1 TROU	
16	W16SEAL2H	PROTECTION DE PASSAGE INTERNE CABLERIE - 2 TROUS	
16	W16SEALNOH	PROTECTION DE PASSAGE INTERNE CABLERIE - 0 TROU	

Protectors

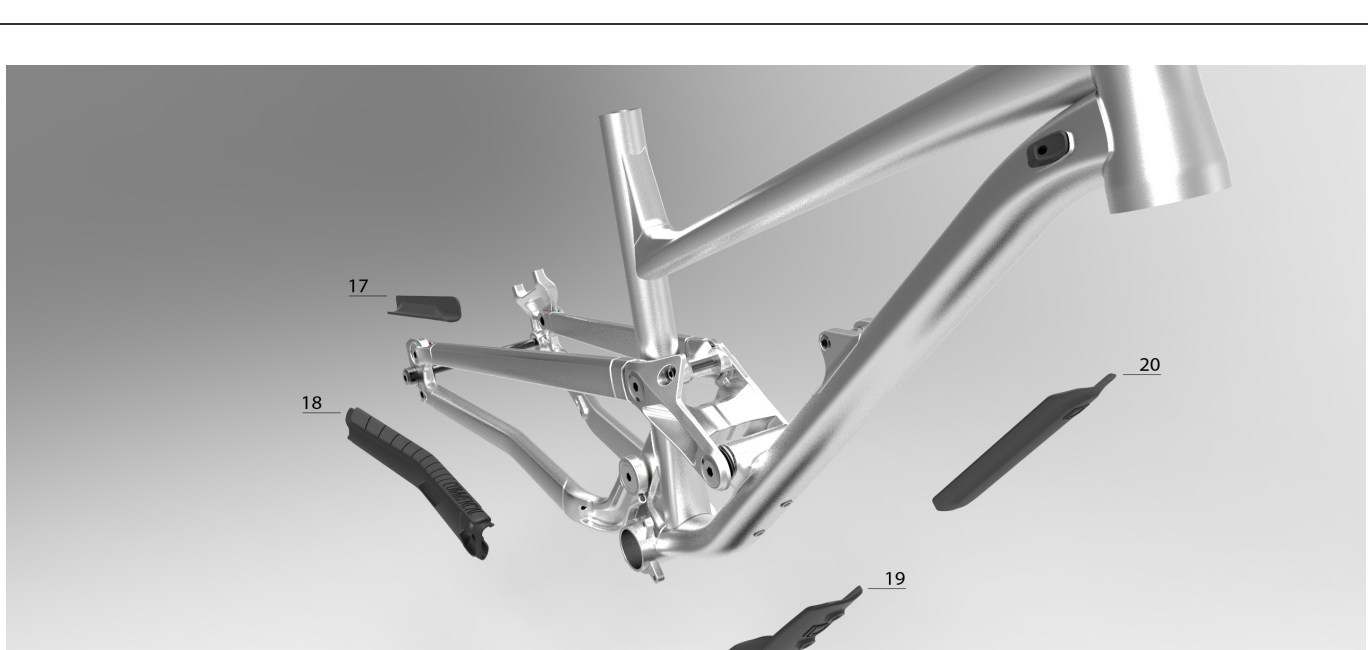

Index	Ref	Nom	Photo
17	A155STPROTECMTA14	PROTEGE HAUBAN META, CLASH ET META-POWER	
18	W19CLHPROTECCS	PROTECTION DE BASE CLASH, META & FRS	
19	W21CLHPROTECDT	PROTECTION DE DOWN TUBE CLASH V2	
20	W19PROTECPICKUP	PROTECTION DE DOWN TUBE FOUR TRANSPORT EN PICKUP	

Dropper Post Routing

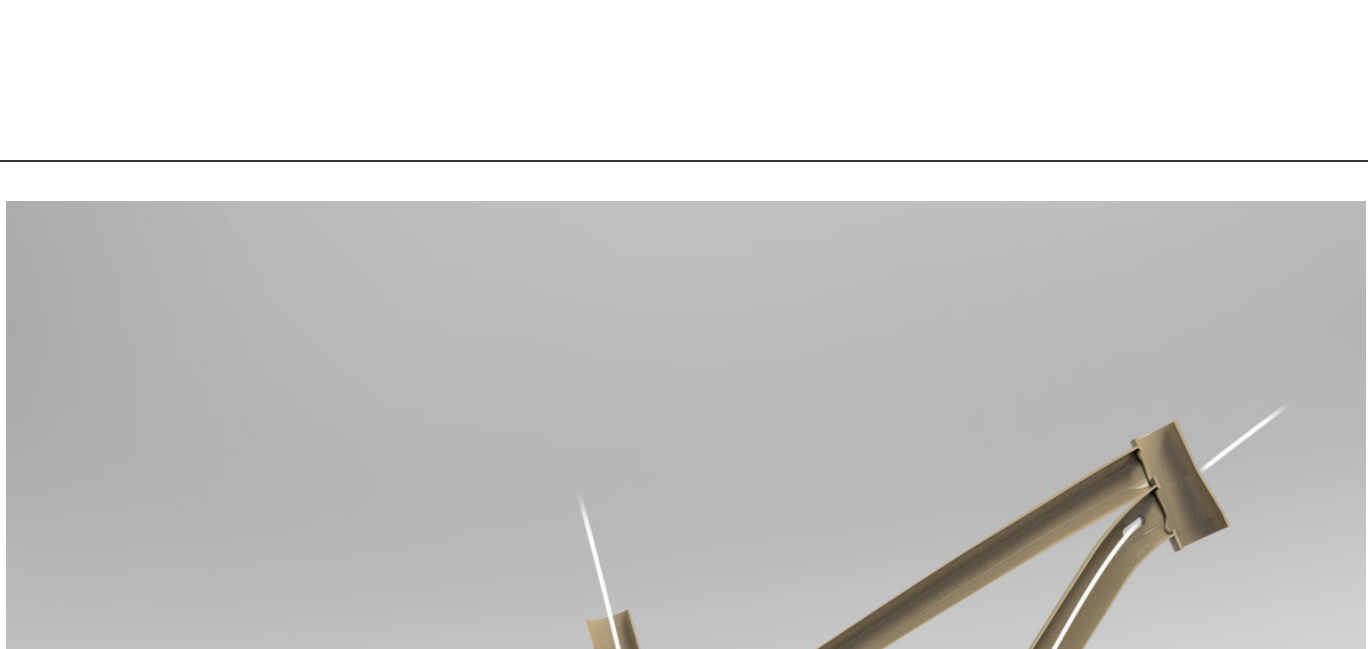

Index	Ref	Nom	Photo
-------	-----	-----	-------