


COMMENCAL CLASH PARK EDITION METALLIC PURPLE

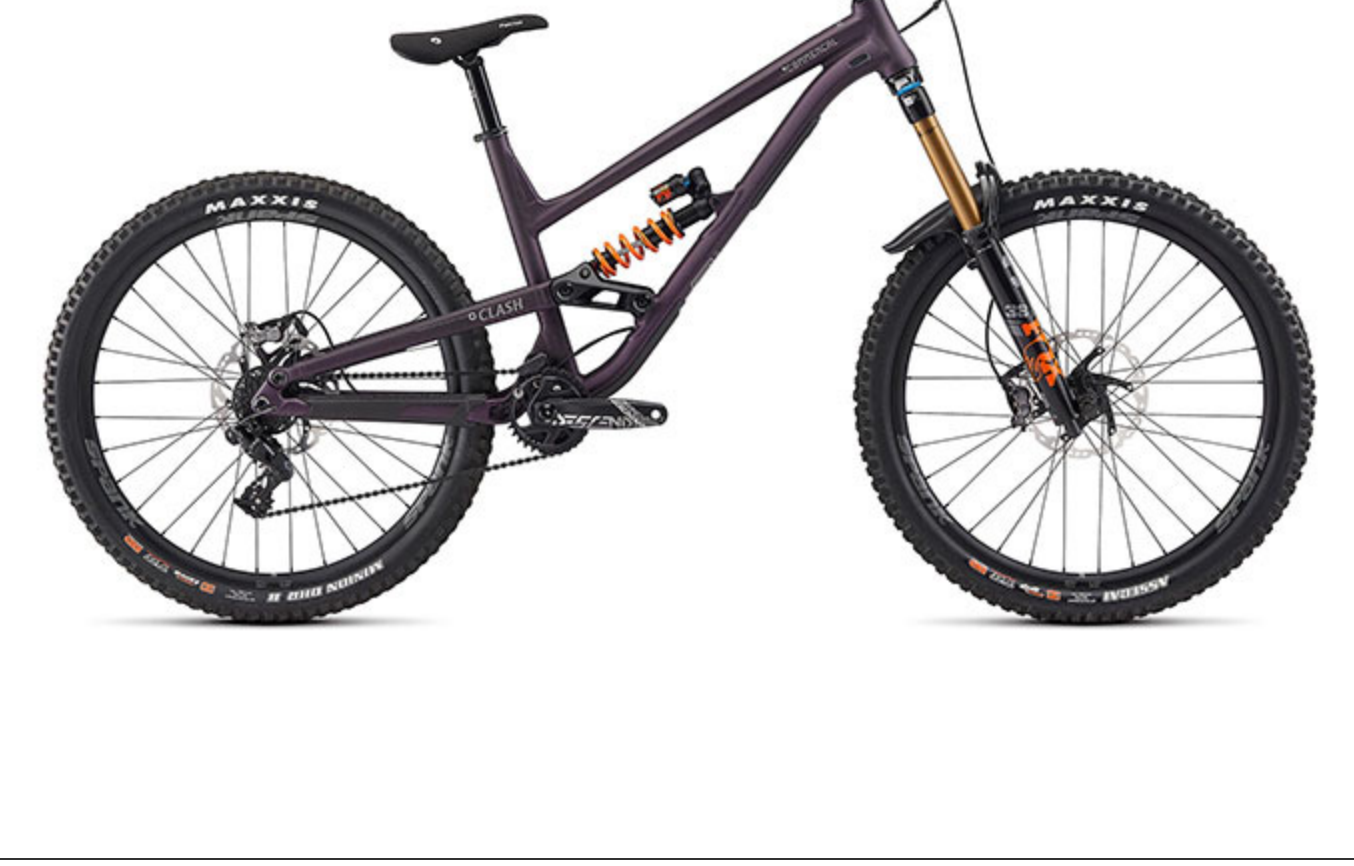

SPECS


CADRE CLASH, 170 mm travel 27.5", Alloy 6066, triple butted tubes, T4, T6. Enduro bearings
AMORTISSEUR FOX DHX2 Factory 230 x 65 mm, HSC, LSC, HSR, LSR. Spring rates : 400lbs on S, 450lbs on M, 500lbs on L, 550lbs on XL, 2-position adjustment
FOURCHE FOX 38 Factory, 180 mm travel 27.5", Grip 2 dampers, HSC, LSC, HSR, LSR, Boost (15 x 110 mm), 37 mm offset, 1 Token
JEU DE DIRECTION ACROS Z544/Z556 Alloy cups, sealed bearings
POTENCE TITLE ST1 35 40 mm extension, 35 mm, Alloy 6061 T6, oil slick stainless steel bolts
CINTRE TITLE AH1 35 35 mm, 810 mm width, 20 mm rise, Alloy 7050 T74
GRIPS ODI Elite Mutton Soft pro compound, single clamp, black
FREINS SHIMANO XT, 4 pistons, I-Spec EV compatible Rotor: SHIMANO SM-RT86 203 mm, 6-bolt, Ice Technology Freeza
SHIFTERS SRAM GX DH 7s
GUIDE CHAÎNE E13 TRS 30-32t
DERAILLEUR SRAM GX DH 7s
BOÎTIER DE PEDALIER SRAM DUB Pressfit
PEDALIER TRUVATIV Descendant, 165 mm crank arms, DUB Chainring: TRUVATIV Descendant X-Sync, 32t
CHAÎNE KMC X11EL Black
CASSETTE SRAM GX DH 7s, 11-25t
JANTES SPANK Spike Race 33 27.5", 32h, 28 mm inner width, Tubeless Ready
MOYEURS Rear: SPANK Spike - Front: SPANK Spike Rear: HEX J-Type, 32h, 2 sealed bearings, 12 x 148 mm, HG, black - Front: HEX J-Type, 32h, 2 sealed bearings, 15 x 110 mm, black
RAYONS SPANK J-Hook J-Bend, tripple butted 2.2/1.8/2.0, stainless, with Nyllok, black
PNEUS Rear: MAXXIS DHR II - Front: MAXXIS Assegai Rear: 27.5" x 2.4", WT, 3C MaxxTerra, EXO+, Tubeless Ready - Front: 27.5" x 2.5", WT, 3C MaxxGrip, EXO+, Tubeless Ready
TIGE DE SELLE SDG Micro I-Beam 31.6 mm, 250 mm length
SELLE SDG Patriot I-Beam Kevlar reinforced
POIDS 15,6 kg Average weight for S size, without pedals. Weight may differ slightly due to manufacturing tolerances.
PÉDALES No
COULEUR METALLIC PURPLE Matte Finish
ACCESSOIRES Down tube protector, chainstay protector, seatstay protector, shuffle pad

- Vidéos

TECH


TYPE DE VELO ENDURO / FREERIDE
CADRE Al 6066T6
POIDS DU CADRE 4 kg
DEBATTEMENT ARRIERE Adjustable via flip chip: 170 mm on Grip position / 155 mm on Dynamic position
ENTRE-AXE / COURSE 230 mm x 65 mm
COMPATIBLE PIGGY BACK Yes
BUSELURES AMORTISSEUR 20 x 8 mm - 30 x 10 mm
HAUTEUR DE FOURCHE RECOMMANDEE / MAX 572 mm / 586 mm
DOUILLE DE DIRECTION Tapered
JEU DE DIRECTION Z544 / Z556
LARGEUR MAXIMALE PNEUS (ETRTO) 65 mm
STANDARD FREIN A DISQUE Postmount 200 mm
DIAMETRE MAX DISQUE DE FREIN AR 223 mm
DIAMETRE TIGE DE SELLE / COLLIER DE SELLE 34,9 mm / 38,5 mm
BOÎTIER DE PEDALIER Press Fit BB 92
ISCG ISCG05
DERAILLEUR AVANT No
AXE DE ROUE ARRIERE 148 x 12 mm - Géométrie - Tailles

Contact System

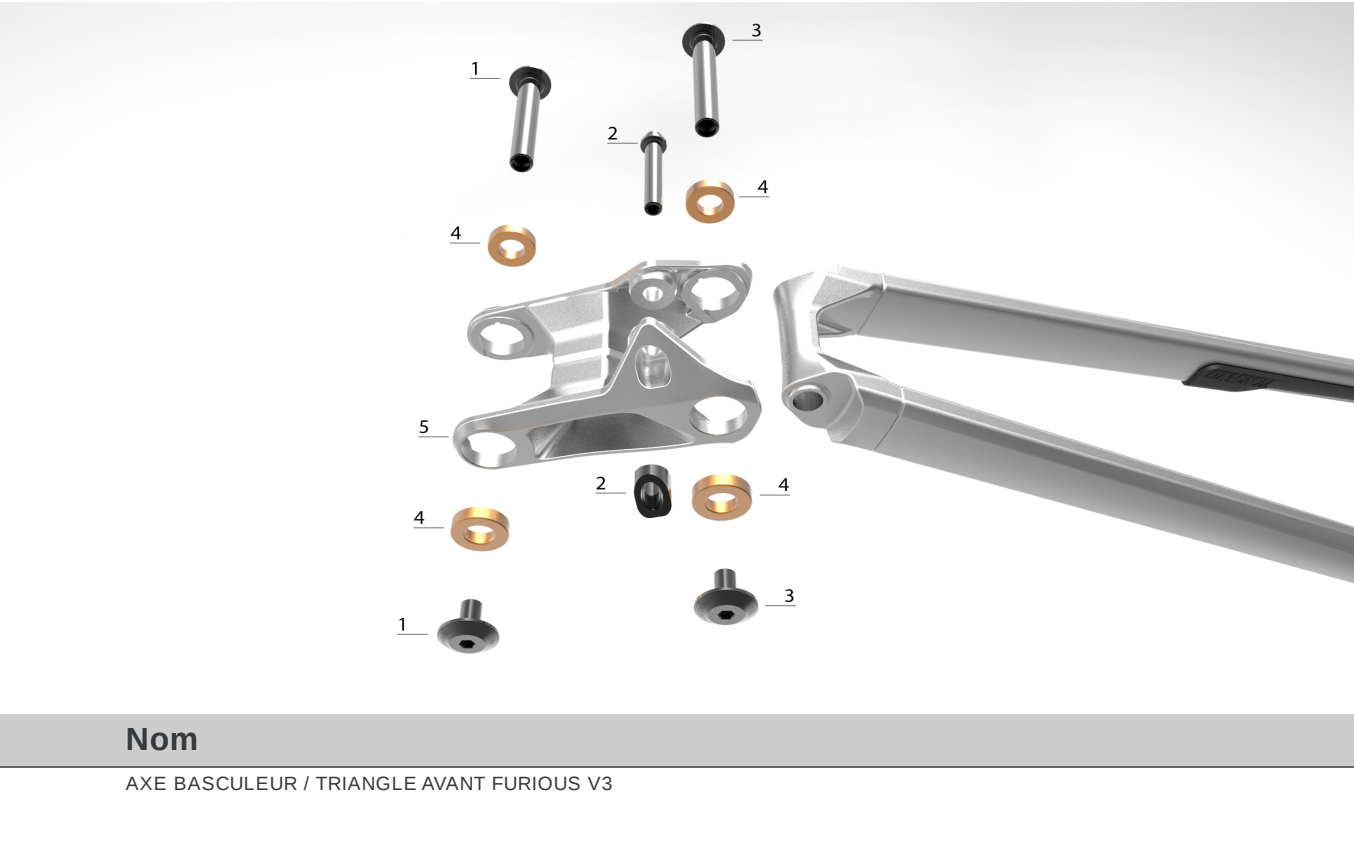


Index	Ref	Nom	Photo
1	W20FUV3AXLERKFT	AXE BASCULEUR / TRIANGLE AVANT FURIOUS V3	
2	W18DH29AXLERKSH	AXE AMORTISSEUR / BASCULEUR SUPREME DH / CLASH	
2	W21CLHSHINS	PIEDT AXE AMORTISSEUR CLASH V2	
3	W21CLHAXLERKSS	AXE BASCULEUR / HAUBANS CLASH V2	
4	W19EB6902	ROULEMENT ENDURO BEARINGS 6902 LLU MAX	
5	W21CLHRROCKER	BASCULEUR CLASH V2	
BEARING KIT	W21EBFURIOUS	ROULEMENTS ENDURO BEARINGS META V3, SUPREME DH V3, V4, FRS, CLASH	

Main Pivot

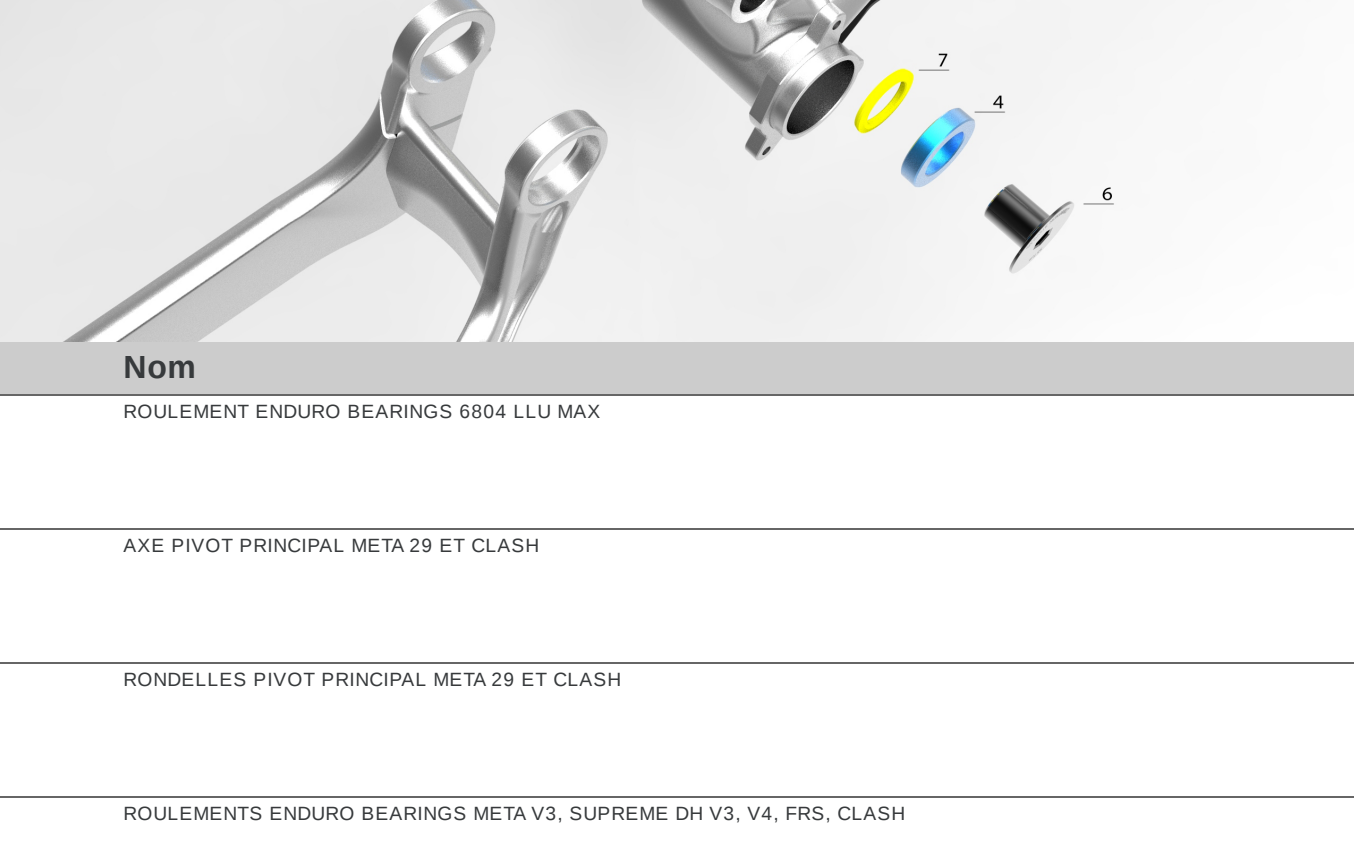


Index	Ref	Nom	Photo
4	W19EB6604	ROULEMENT ENDURO BEARINGS 6804 LLU MAX	
6	W19M29AXLEMP	AXE PIVOT PRINCIPAL META 29 ET CLASH	
7	W19M29WASHERMP	RONDILLES PIVOT PRINCIPAL META 29 ET CLASH	
BEARING KIT	W21EBFURIOUS	ROULEMENTS ENDURO BEARINGS META V3, SUPREME DH V3, V4, FRS, CLASH	

Chainstays / Seatstays

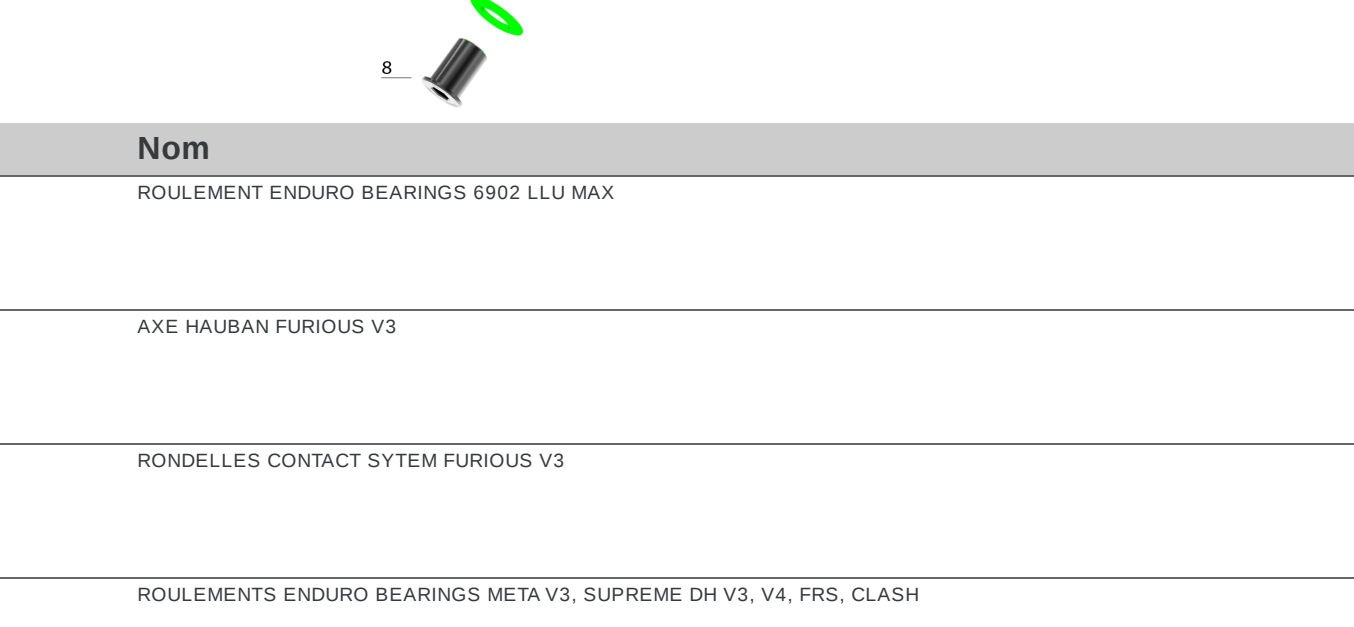

Index	Ref	Nom	Photo
4	W19EB6902	ROULEMENT ENDURO BEARINGS 6902 LLU MAX	
8	W20FUV3AXLECS	AXE HAUBAN FURIOUS V3	
9	W20FUV3WASHERCS	RONDILLES CONTACT SYTEM FURIOUS V3	
BEARING KIT	W21EBFURIOUS	ROULEMENTS ENDURO BEARINGS META V3, SUPREME DH V3, V4, FRS, CLASH	

Dropouts

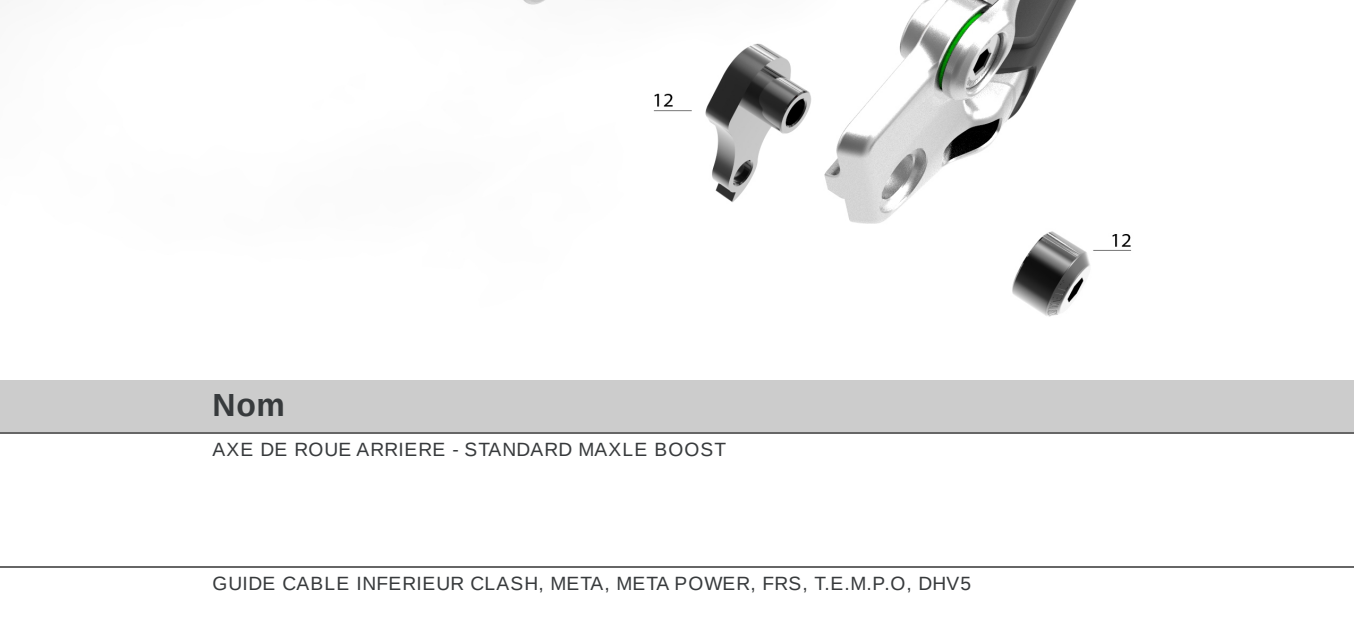


Index	Ref	Nom	Photo
10	W19AXLEWHEELBOOST	AXE DE ROUE ARRIERE - STANDARD WHEEL BOOST	
11	W19CLHCABLEGUIDEB	GUIDE CABLE INTERIEUR CLASH, META, METAPOWER, FRS, T.E.M.P.O, DHVS	
12	W21CLHRHR	PATTE DE DERAILLEUR CLASH V2	

Downtube




Index	Ref	Nom	Photo
13	W21CLHNSRRPFT	FLIP CHIP CLASH V2	
14	W20FUV3CABLEGUIDET	GUIDE CABLE SUPERIEUR FRS V3, CLASH V2	

Seals

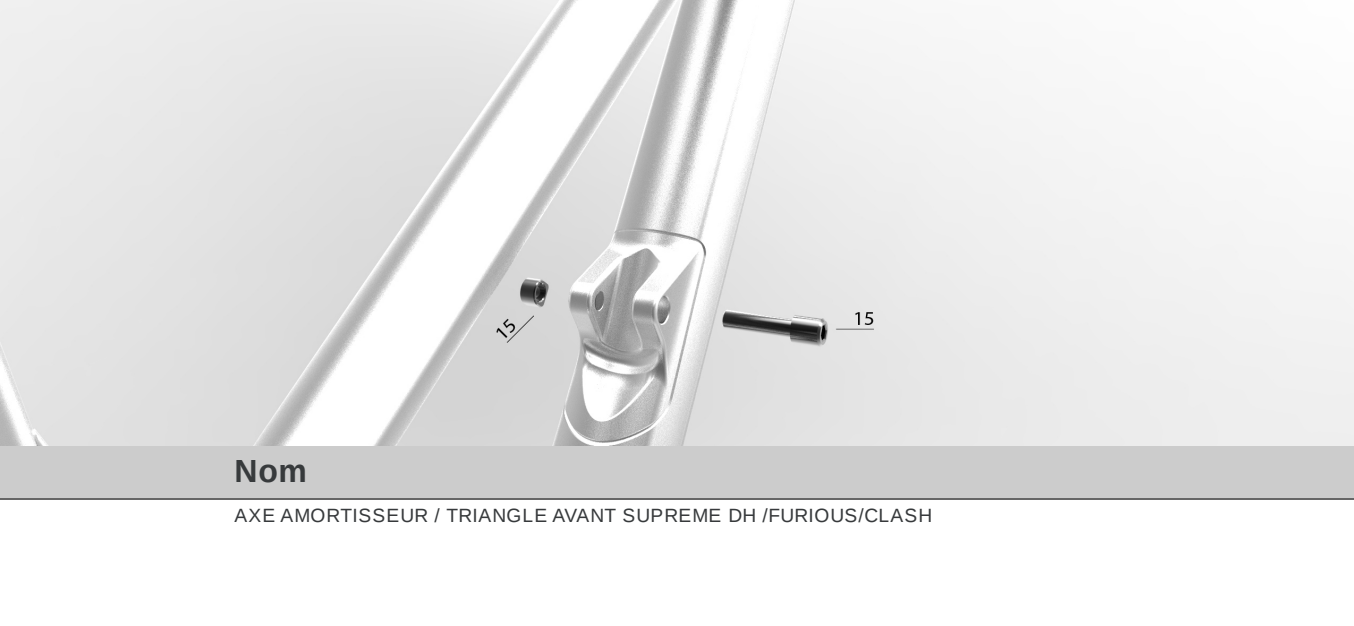


Index	Ref	Nom	Photo
15	W16DHV4SHOCKAXLE	AXE AMORTISSEUR / TRIANGLE AVANT SUPREME DH / FURIOUSCLASH	
16	W18SEAL1H	PROTECTION DE PASSAGE INTERNE CABLERIE - 1 TROU	
16	W18SEAL2H	PROTECTION DE PASSAGE INTERNE CABLERIE - 2 TROUS	
16	W18SEALNOH	PROTECTION DE PASSAGE INTERNE CABLERIE - 0 TROU	

Protectors

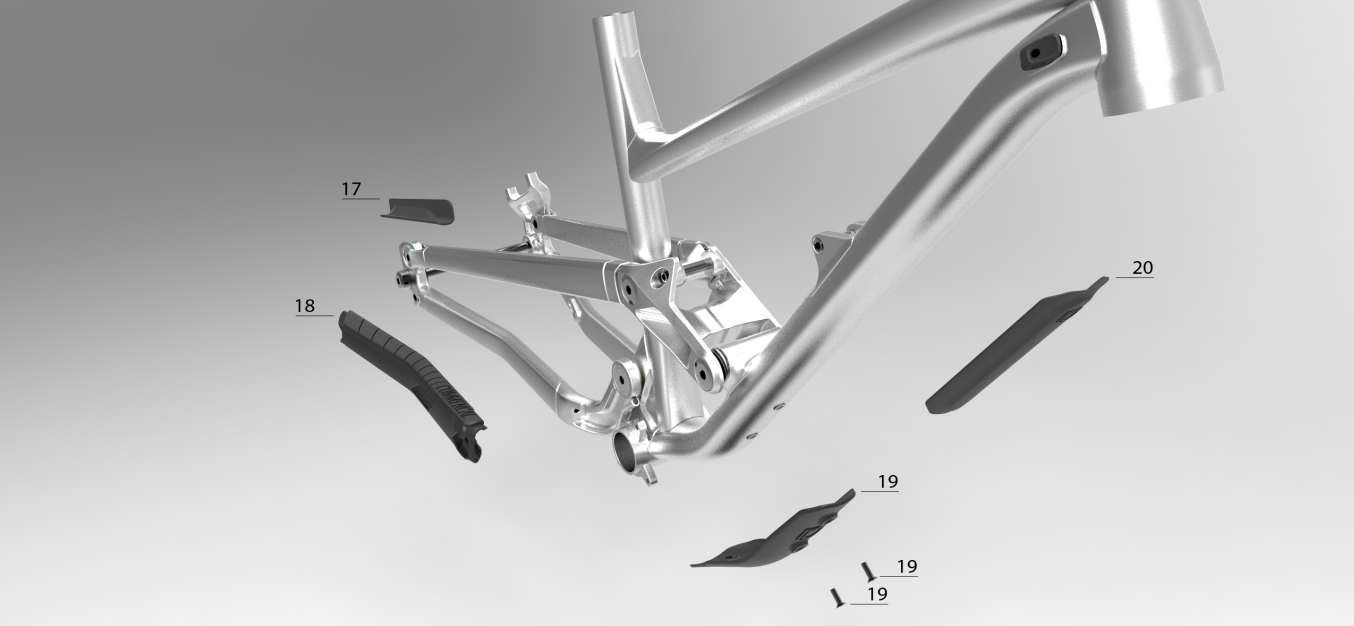

Index	Ref	Nom	Photo
17	AJ55STPROTECTEMTA4	PROTECTOR HAUBAN META, CLASH ET METAPOWER	
18	W19CLHPROTECCS	PROTECTION DE BASE CLASH, META & FRS	
19	W21CLHPROTECDT	PROTECTION DE DOWN TUBE CLASH V2	
20	W19PROTECPICKUP	PROTECTION DE DOWN TUBE FOUR TRANSPORT EN PICKUP	

Dropper Post Routing

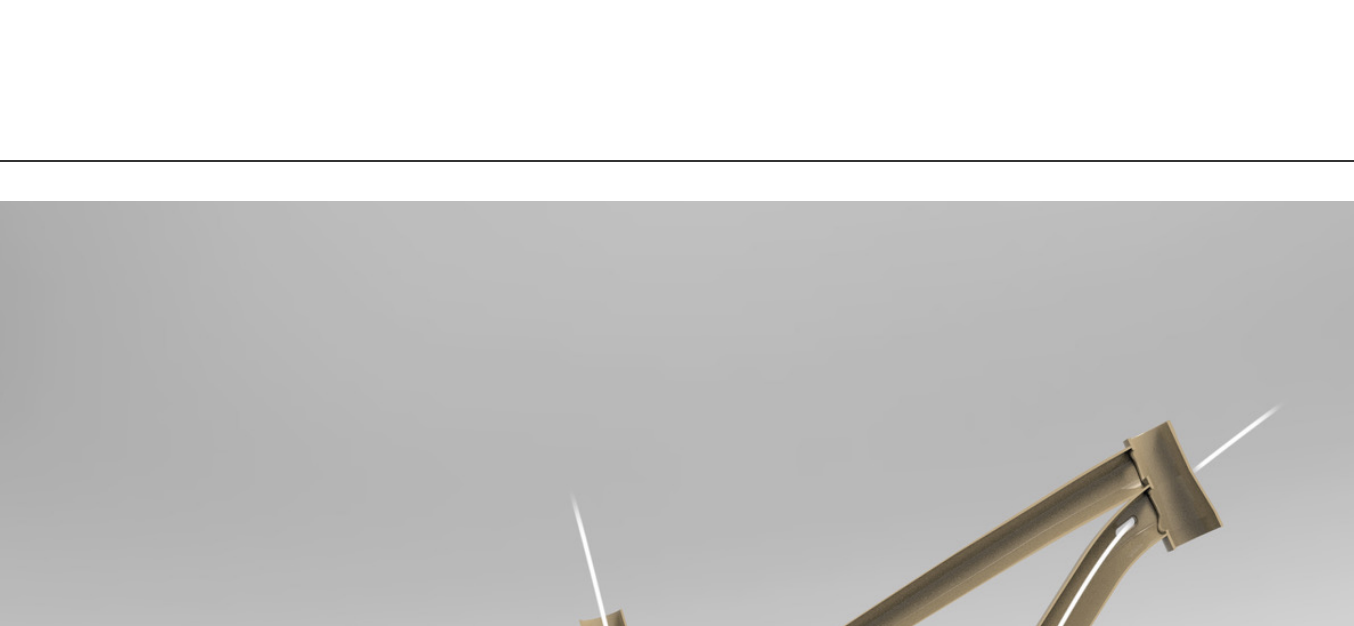

Index	Ref	Nom	Photo
17	AJ55STPROTECTEMTA4	PROTECTOR HAUBAN META, CLASH ET METAPOWER	
18	W19CLHPROTECCS	PROTECTION DE BASE CLASH, META & FRS	
19	W21CLHPROTECDT	PROTECTION DE DOWN TUBE CLASH V2	
20	W19PROTECPICKUP	PROTECTION DE DOWN TUBE FOUR TRANSPORT EN PICKUP	