

2023

COMMENCAL META TR RIDE 2023

<https://tech.commencal.com/tech/index.php?uche=602&lang=>


SPECS

FRAME
META V5, 150 mm travel
29", Alloy 6066, triple butted tubes, T4, T6
SHOCK
ROCKSHOX Deluxe Select +
210 x 55 mm, rebound, threshold adjustment, 2 tokens
FORK
ROCKSHOX Lyrik Base, 160 mm travel
29", Rush RC damper, DebonAir+ , LSC, rebound, Boost (15 x 110 mm), 44 mm offset, 0 Token
HEADSET
ACROS Z556 / Z556
Alloy cups, sealed bearings
STEM
RIDE ALPHA 40
40 mm extension, 31.8 mm
BAR
RIDE ALPHA R20 760 on S - RIDE ALPHA R27 780 on M / L - RIDE ALPHA R27 800 on XL
31.8 mm, 760 mm width, 20 mm rise, Alloy 6061 on S - 31.8 mm, 780 mm width, 27 mm rise, Alloy 6061 on M / L - 31.8 mm, 800 mm width, 27 mm rise, Alloy 6061 on XL
GRIPS
ODI Longneck
Soft compound, single clamp, black
BRAKES
SRAM D68, 4 pistons, MatchMaker compatible
Rotor: SRAM G2 ClearSweep 200 mm, 6 holes
SHIFTERS
SRAM NX Eagle
12s
CHAIN GUIDE
RIDE ALPHA4
32s-34t
REAR MECH
SRAM NX Eagle
12s
BOTTOM BRACKET
SRAM DUB WIDE
Pressfit
CRANKSET
SRAM X1 1000 Eagle, 170 mm crank arms, DUB, Boost
Chaining: SRAM Eagle, 32t, Narrow-Wide
CHAIN
SRAM NX Eagle
12s
CASSETTE
SRAM PG-1210
12s, 11-50t
RIMS
SPARK SPIKE RACE 33
29", 32h, 28 mm inner width
HUBS
Rear: FORMULA DCL 348A - Front: FORMULA DC-711
Rear: 32h, sealed bearings - Front: 32h, sealed bearings
SPOKES / NIPPLES
SAPIM Race
J-Bend, 2.0-1.8-2.0mm, double butted, stainless, with Nylok, black
TYRES
Rear: MAXXIS DHR II - Front: MAXXIS DHR II
Rear: 29"x2.40" WT, EXO, Dual, Tubeless Ready - Front: 29"x2.40" WT, EXO, 3C MaxxGrip, Tubeless Ready
SEATPOST / SEAT CLAMP DIAMETER
KS Rage+1
34.9 mm, travel: 125 mm on S, 170 mm on M/L and 190 mm on XL, SouthPaw alloy remote
SADDLE
SDG Gel Air V3
Steel Rails
WEIGHT
15.9 kg / 35.05 lb
Average weight for S size, without pedals. Weight may differ slightly due to manufacturing tolerances.
PEDALS INCLUDED
No
COLOUR
Pyrite Grey
Shiny Finish
ACCESSORIES
Down tube protector, chainstay protector, seatstay protector, pick up pad, fork fender
*Please note that bike specs are subject to change without prior notice.

TECH


BICYCLE TYPE
ENDURO 29"
FRAME MATERIAL
AL 6061 T4, T6, AL 6066 T4, T6
FRAME WEIGHT
3.25 kg / 7.16 lb, raw without accessories
REAR TRAVEL
150 mm
SHOCK LENGTH / STROKE
210 x 55 mm
PIGGY BACK SHOCK COMPATIBLE
Yes
SHOCK BUSHINGS
NOTHING ON SHAFT / 20 X 10 mm ON BODY
RECOMMENDED / MAX. FORK HEIGHT
571 mm / 44 mm
HEADSET TYPE
Z556 / Z556, integrated cable routing
MAXIMUM TYRE DIMENSION (ETRTO)
64 mm / diam. 753
DISC BRAKE STANDARD
Postmount, 200 mm
REAR ROTOR MAX. SIZE
223 mm
SEATPOST / SEAT CLAMP DIAMETER
34.9 mm / 38.9 mm
BOTTOM BRACKET TYPE
Press Fit BB 92
ISCG
ISCG 05
REAR HUB COMPATIBILITY
148 x 12 mm / Made 180 x 12 mm UDH

GEOMETRIE

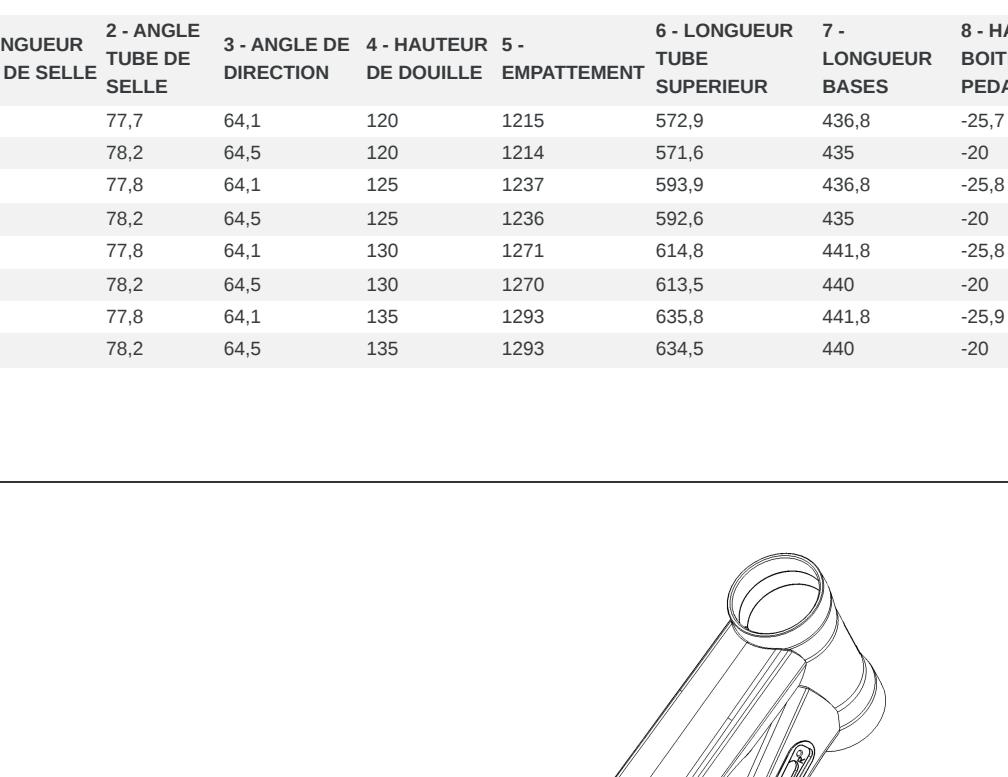


TAILLE	1 - LONGUEUR TUBE DE SIELE	2 - ANGLE TUBE DE SIELE	3 - ANGLES DE DIRECTION	4 - HAUTEUR DE DOSSIER	5 - EMPLOI SUPERIEUR	6 - LONGUEUR TUBE SUPERIEUR	7 - LONGUEUR TUBE BAS	8 - HAUTEUR DE PEGAS	9 - HAUTEUR DE FOURCHE L'ANTICAMBE	10 - HAUTEUR DE FOURCHE L'ANTICAMBE	11 - PROTECTOR HORIZONTAL	12 - PROTECTOR VERTICAL
XS	200	75.1	62.1	125	121.8	511.9	602.5	62.7	171	435.1	435.1	435.1
S	200	75.2	64.2	128	121.4	511.6	602.5	62.7	171	440	435.1	435.1
M	200	75.2	64.2	128	121.4	511.6	602.5	62.7	171	445.1	435.1	435.1
L	200	75.2	64.2	128	121.4	511.6	602.5	62.7	171	450.1	435.1	435.1
XL	200	75.2	64.2	128	121.4	511.6	602.5	62.7	171	455.1	435.1	435.1

Front Triangle

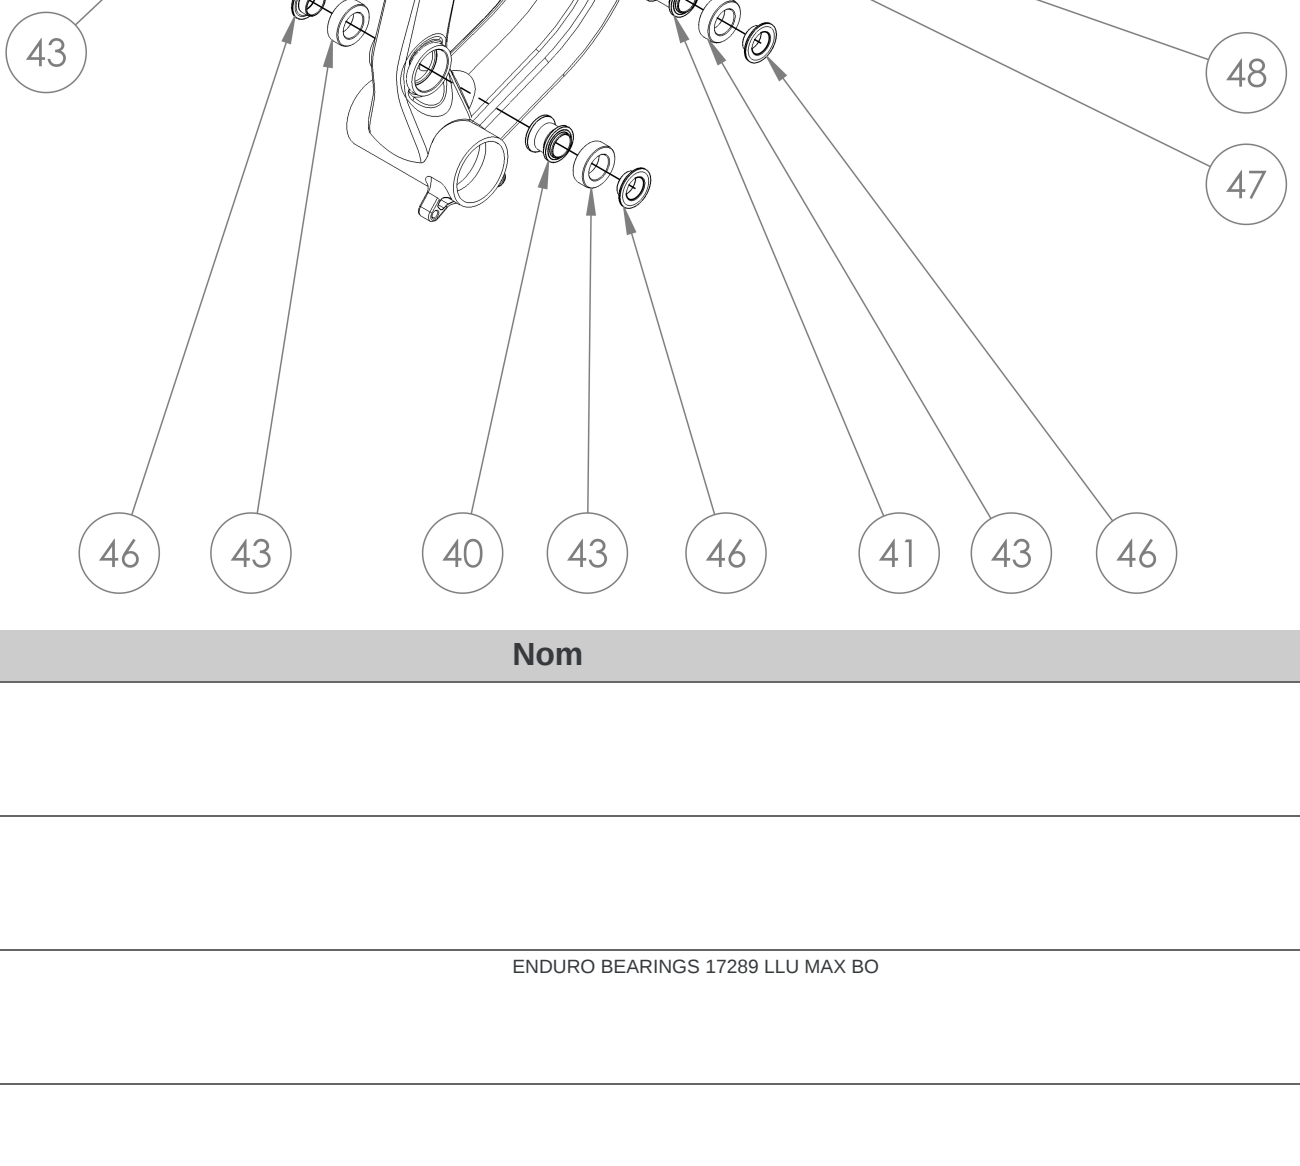


Index	Ref	Nom	Photo
40	W23MTV5SPACERLFT		
41	W23MTV5SPACERLFT		
42	W21EB17289	ENDURO BEARING 17289 LLL MAX ISO	17 x 28 x 9
43	W23MTV5WASHERLL		

Links

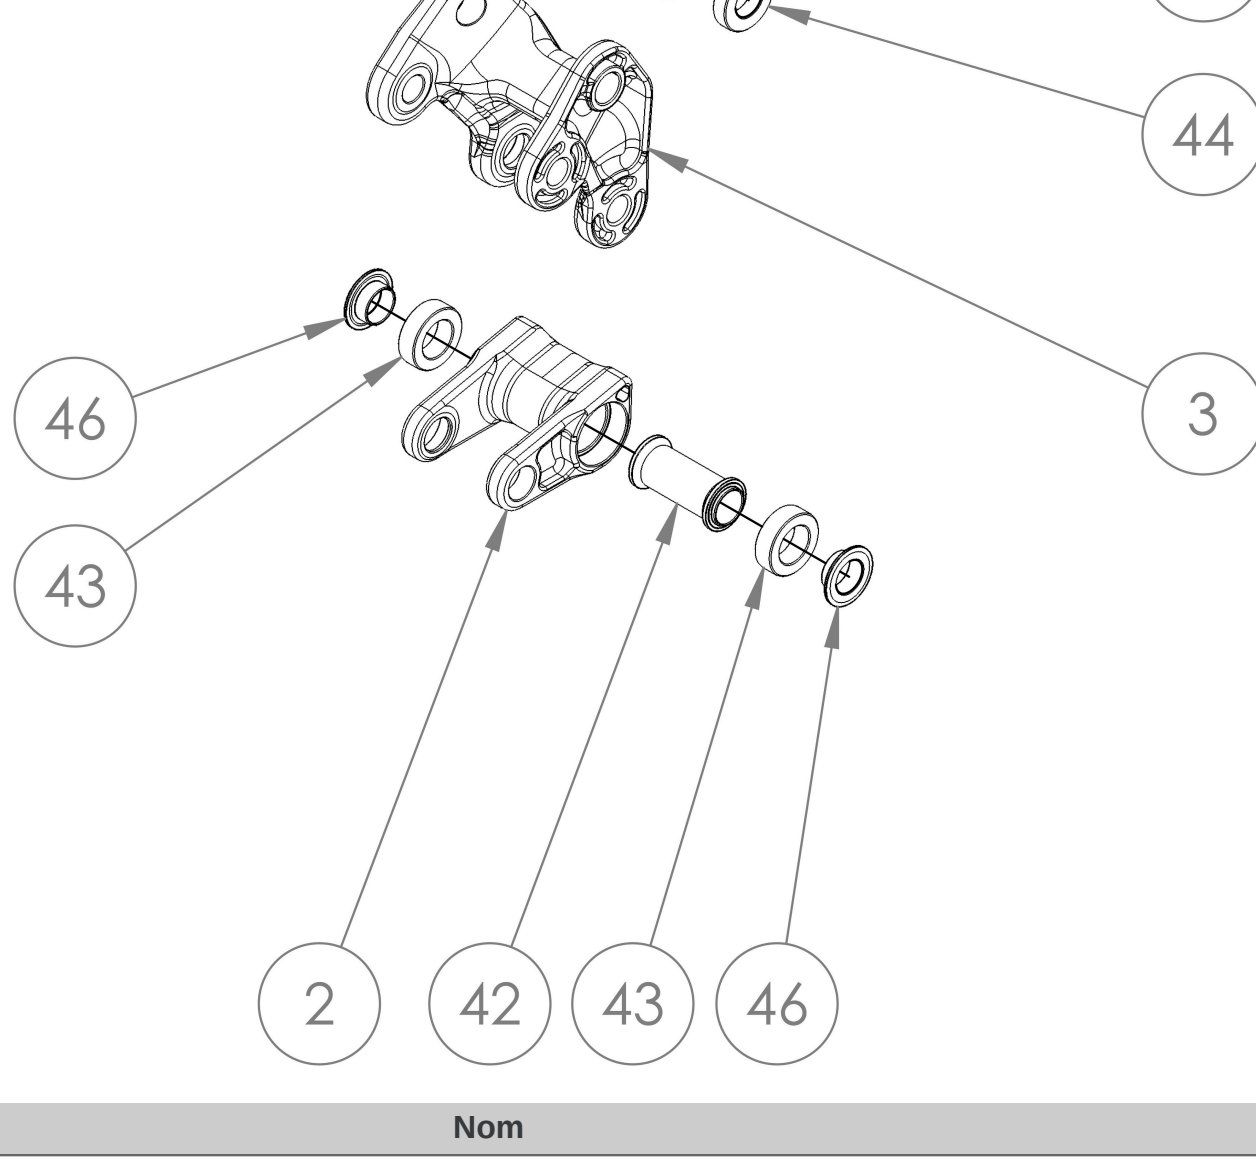


Index	Ref	Nom	Photo
1	W23MTV5LOWERLINK		
27-28-29	W23MPWTRAXLESCHL	SHOCK / CLAVIER AXES META POWER TR	9 x 6
3	W23MTV5UPPERLINK		
4	W23MTV5CLEVIS		
42	W23MTV5SPACERLRT		
43	W21EB17289	ENDURO BEARING 17289 LLL MAX ISO	17 x 28 x 9
44	W23EB18002	BEARING ENDURO BEARING 18002 LLL MAX	15 x 28 x 7
45	W23MTV5WASHERLL		

Rear Triangle

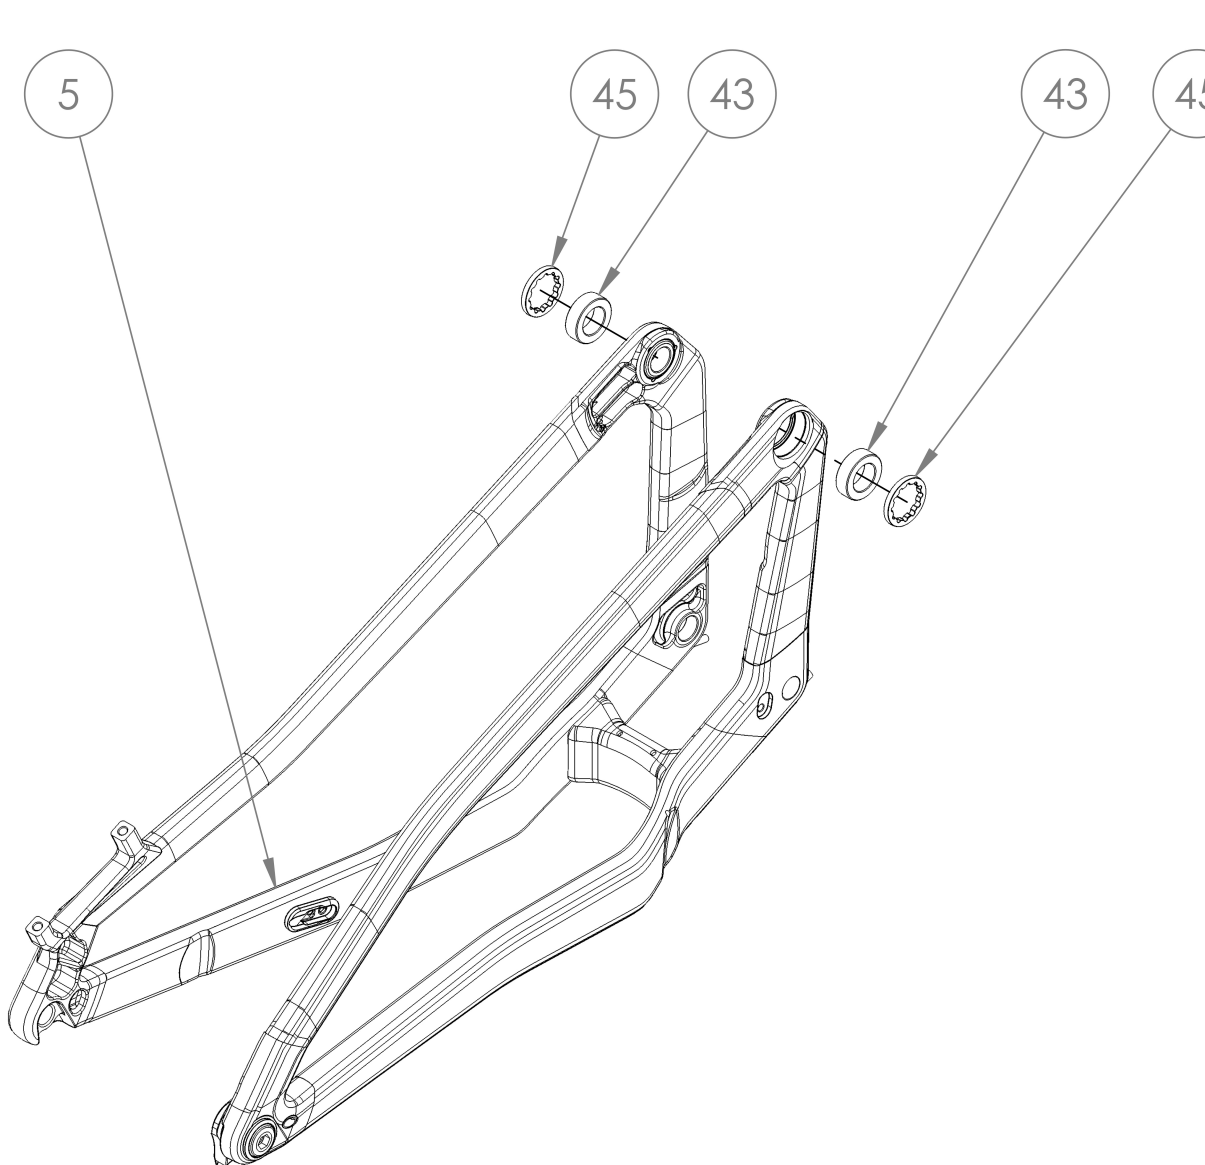


Index	Ref	Nom	Photo
42	W21EB17289	ENDURO BEARING 17289 LLL MAX ISO	17 x 28 x 9
45	W21METALOCKRINGS	BEARING LOCK RING METAL 002	4 x 6 x 6

Accessories

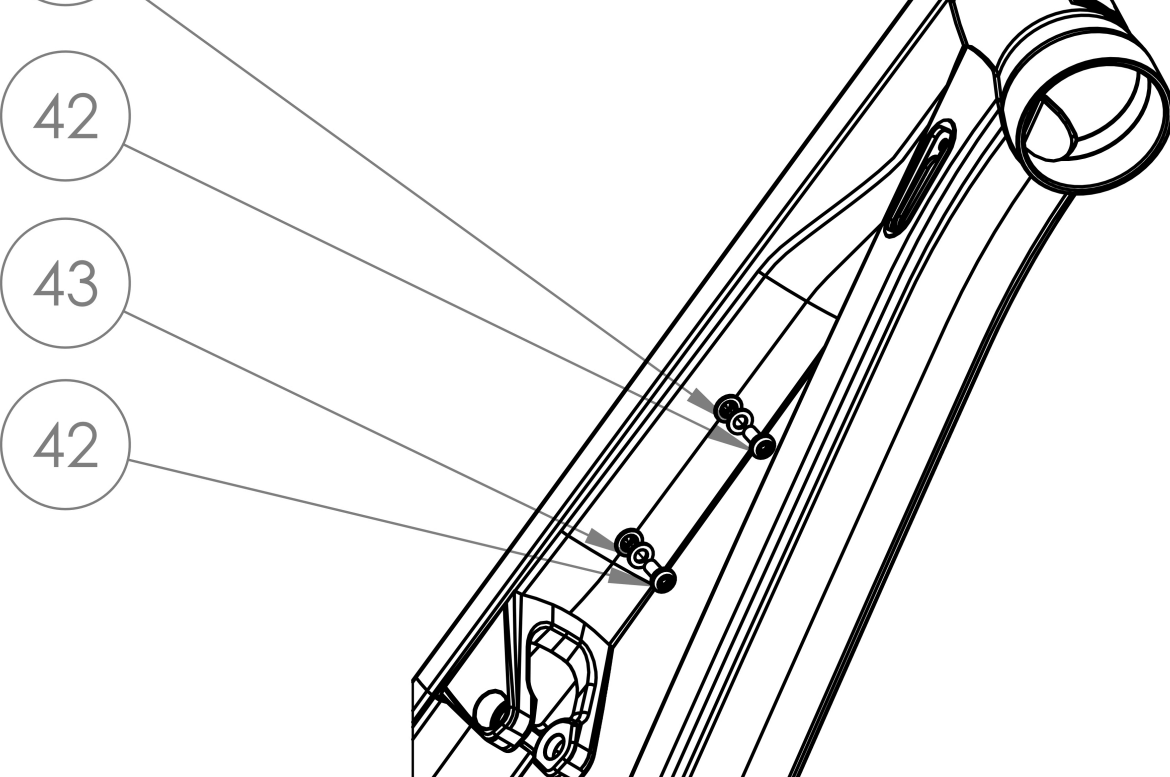


Index	Ref	Nom	Photo
1	W23MTV5PROTECTOR		

Protectors

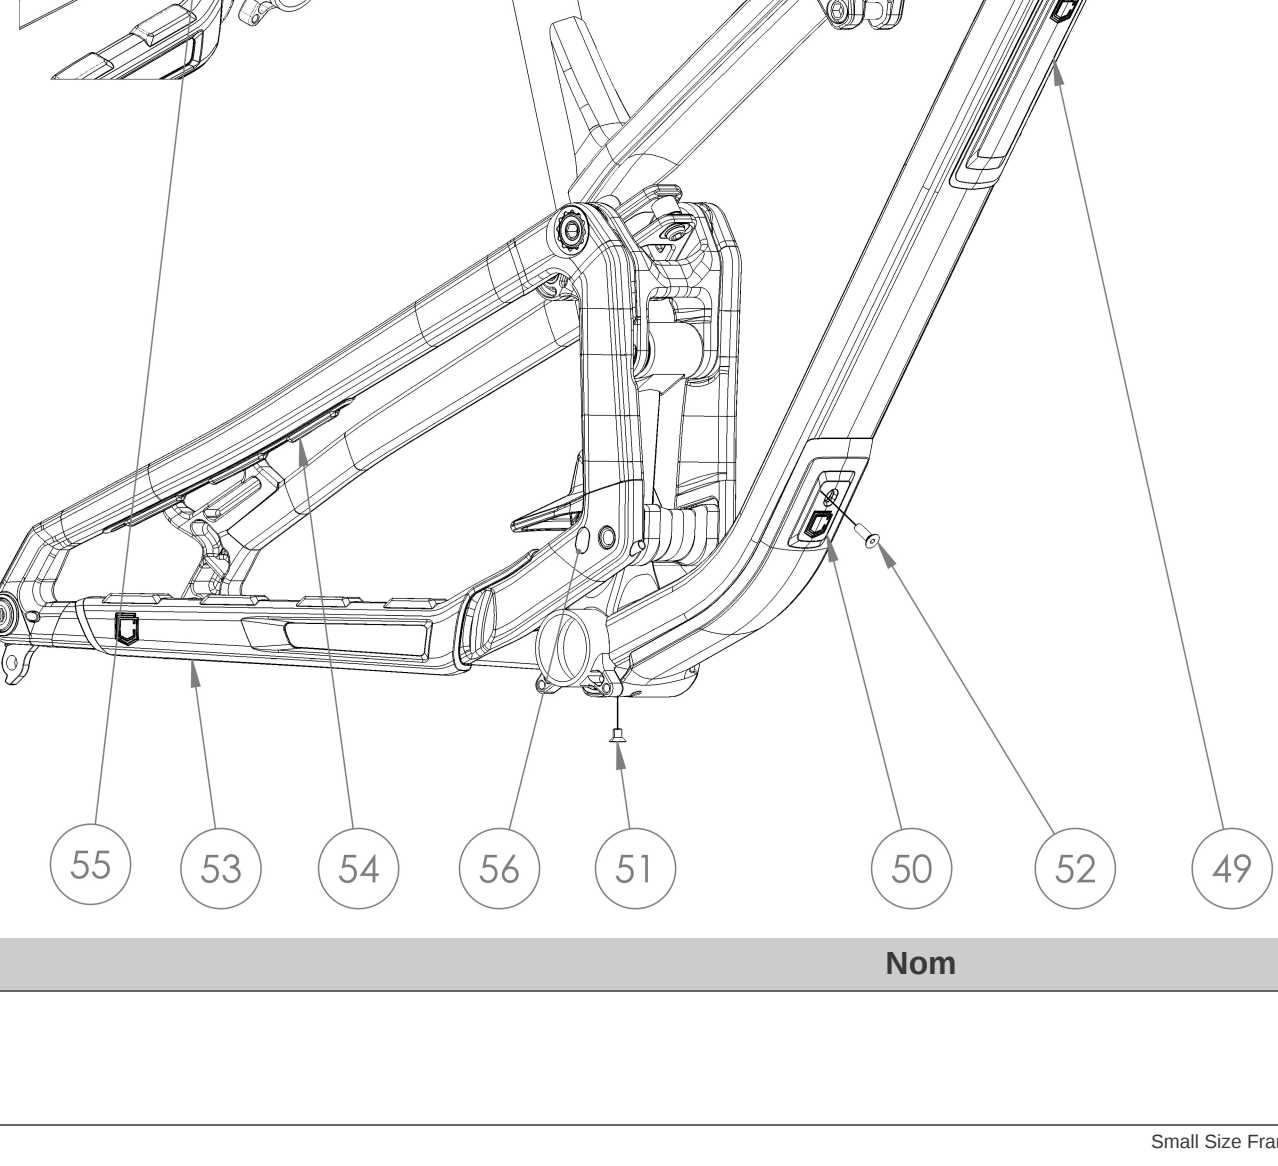




Index	Ref	Nom	Photo
49	W23MTV5PROTECTOR		
50-51-52	W23MTV5PROTECTOR	Small Size Frame	
50-51-52	W23MTV5PROTECTOR	Medium Size Frame	
50-51-52	W23MTV5PROTECTOR	Large Size Frame	
50-51-52	W23MTV5PROTECTOR	X-Large Size Frame	
53	W23MTV5PROTECTOR		
54	W23MTV5PROTECTOR		
55	W23MTV5PROTECTOR		

Complete

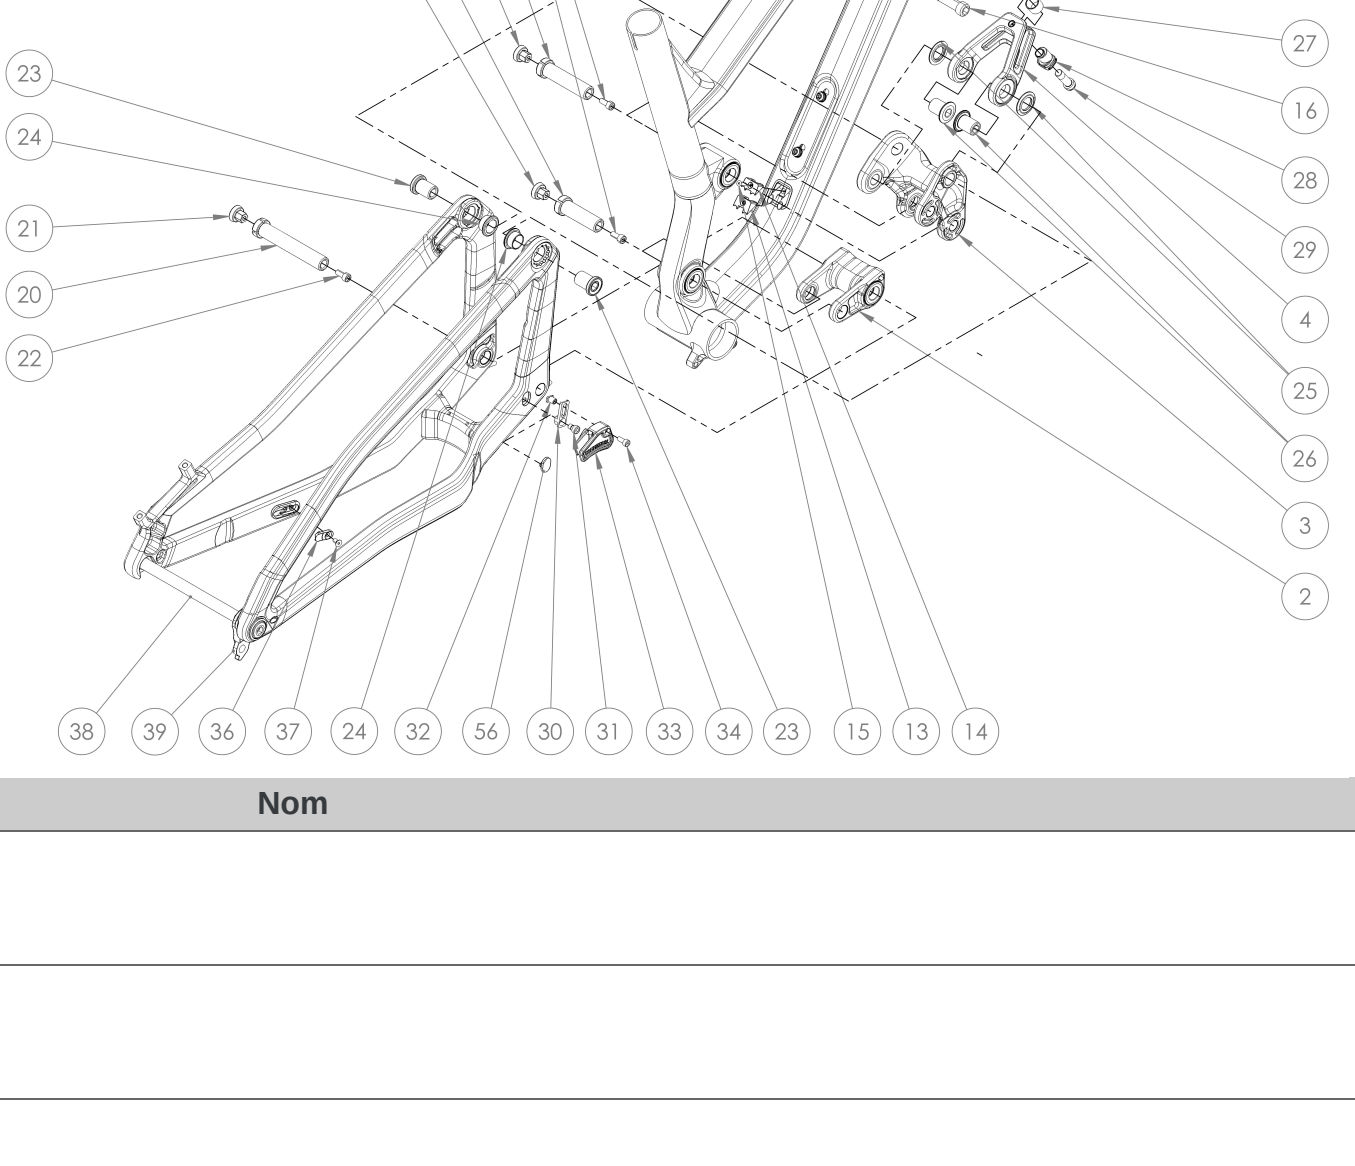

Index	Ref	Nom	Photo
1-15	W23MTV5SCALESCHL		
16-17	W23MTV5SCALESCHL		
18-19	W23MTV5SCALESCHL		
20-21-22	W23TPXAXLELFT	LOWER LINK / FRONT TRIANGLE AXLE T.E.M.P.O.	Axe 20 t / 21 t / 22 t - 6 t N
23-24-25	W23TPXAXLELFT	UPPER LINK / FRONT TRIANGLE AXLE T.E.M.P.O.	Axe 20 t / 21 t / 22 t - 6 t N
2	W23MTV5LOWERLINK		
20-21-22	W23MTV5AXLELRT		Axe 20 t / 21 t / 22 t - 6 t N
23	W23MTV5AXLELRT		12 t N
24	W23MTV5WASHERLRT		
25	W23MTV5AXLELCL		12 t N
27-28-29	W23MPWTRAXLESCHL	SHOCK / CLAVIER AXES META POWER TR	9 x 6
3	W23MTV5UPPERLINK		
30-31	W3BCLHCABLEGUIDE	BOTTOM CABLE GUIDE CLAMP	2 t N
32	W23AXLEWHEELHUB	REAR WHEEL AXLE - HUB AXLE ISO STANDARD	15 t N
33	A23HANGSRAMUOH	CHAINRING, COAXIAL HANGER	25 t N
4	W23MTV5CLEVIS		
55	W23MTV5SPRUGCG		
61-62-63	W23ICRSEALSH		
61-62-63	W23ICRSEALSH		
61-62-63	W23ICRSEALSH		

PARTS

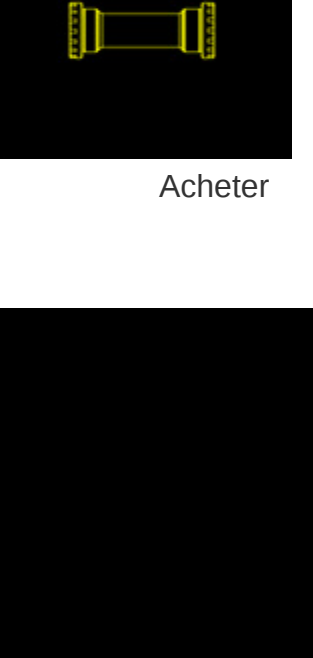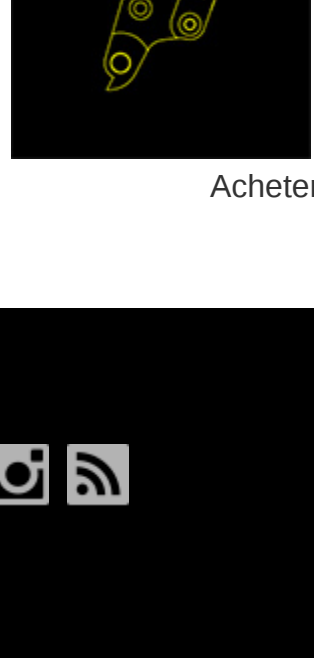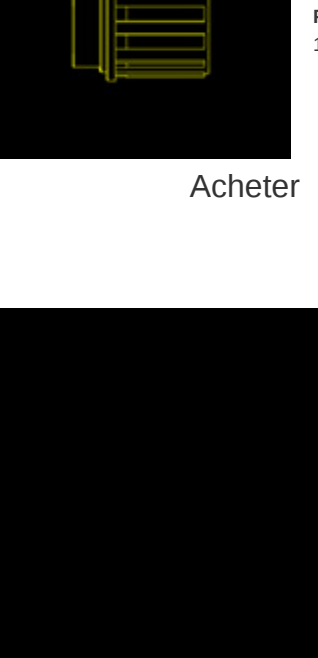Jeu de Direction	Boitier de pédalier	Patte de dérailleur	Corps de roue libre
 Acheter	 Acheter	 Acheter	 Acheter

